

**PB-LWH-06**

High Capacity



**APPLICATIONS**

- Military Training Systems
- Back-up Server Power
- Ruggedized Portable Electronics

**KEY FEATURES**

- SMBus v1.1 smart battery technology compliant
- Smart battery data specification (SBD) v1.1 dataset
- Immersion compliant per MIL-STD-810G, Section 512.5
- EMI compliant per MIL-STD-461F (contact Patco Electronics for details)
- High energy density

**COMPATIBLE CHARGERS**

- **PC-3200M/C** 32-station bulk smart charger
- **PC-6805** 8-bay tactical portable smart charger
- **PC-6010-02** 1-bay tactical portable smart charger
- **PC-6500** dual battery desk top charger
- **PC-6200** single battery desk top charger

**COMPATIBLE CABLES**

- **PE-CC2-02** charge cable for PC-6200 charger
- **PE-CC2-03** charge cable for PC-6500 charger
- **PE-CC2-04** discharge cable

**BATTERY SPECIFICATIONS**

<b>Model No:</b> PB-LWH-06
<b>Energy:</b> 43 Wh
<b>Voltage Range:</b> 10.0V min.; 14.8V nom.; 16.8V max.
<b>Nominal Capacity:</b> 2.9 Ah @ 500mA @ 23°C (74°F)
<b>Maximum Discharge:</b> 2.0 A continuous @ 23°C (74°F)
<b>Maximum Pulse Discharge:</b> 4.0 A for 5 seconds @ 23°C (74°F)
<b>Energy Density:</b> 145 Wh/kg, 180 Wh/l
<b>Weight:</b> 295 grams (0.650 lb.)
<b>Cycle Life:</b> > 300 cycles @ C/5 to 80% of initial capacity @ 100% depth of discharge
<b>Operating Temp:</b> -30°C to 60°C (-22°F to 140°F)
<b>Storage Temp:</b> -20°C to 60°C (-4°F to 140°F)
<b>Self-Discharge:</b> < 3% per month @ 25°C (77°F)
<b>Housing:</b> Hard plastic, black, lusterless, UL 94 V-0, NORYL
<b>Connector:</b> LEMO HEN.1F.305.XLNP
<b>Mating Connector:</b> LEMO FGN.1F.305.YLC
<b>Flat Contacts:</b> Copper alloy with gold plating over nickel plating
<b>Communication:</b> SMBus v1.1 communication protocol SBD v1.1 data set support
<b>State of Charge Indicator:</b> LCD Displays
<b>Safety:</b> See Material Safety Datasheet – MSDS059
<b>Transportation:</b> See MSDS044
<b>Harmonized Tariff Code:</b> 8507.80.0000
<b>NSN:</b> TBD
<b>Manufacturers CAGE Code:</b> 03UN7
<b>Charging:</b> Charge at constant voltage of 16.8 Volts in a temperature range of 0°C to 45°C, limiting current to 1.8 A max, at 23°C, until current declines to 200 mA.

The information contained herein is for reference only all specifications subject to change without notice


PATCO Electronics is a division of TRC | 5250 140<sup>th</sup> Ave North | Clearwater, FL 33760

Tel 727.535.0572 | Fax 727.535.9691 | www.trci.net


October 2013 | PB-LWH-06 | Rev.08

ISO 9001:2008



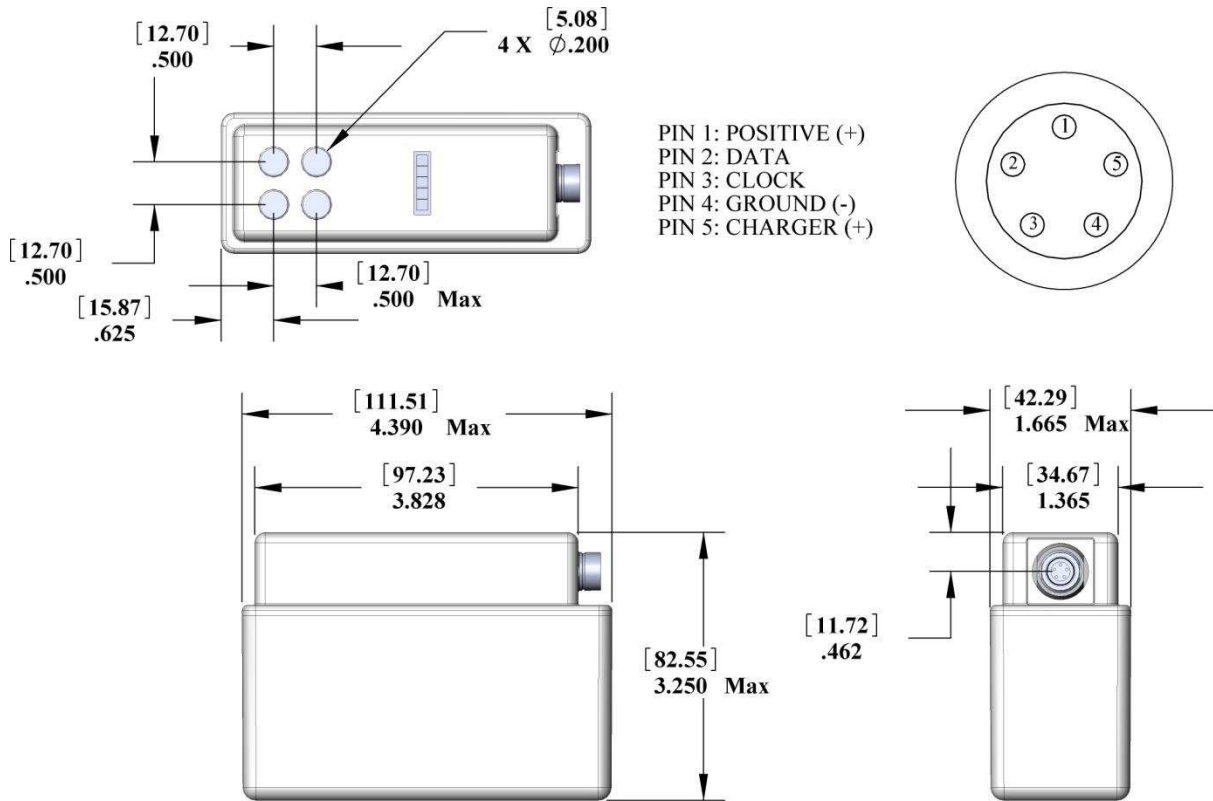

Dimension in: inches [mm]

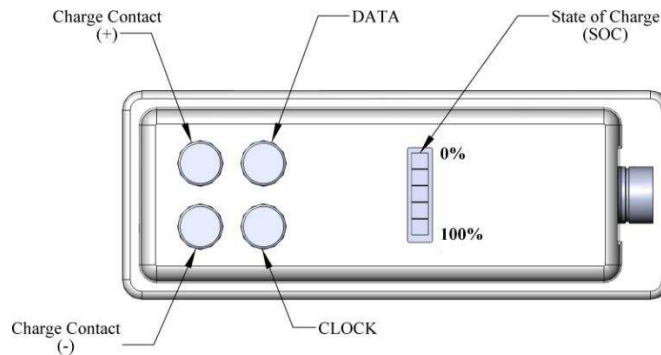

The information contained herein is for reference only all specifications subject to change without notice

PATCO Electronics is a division of TRC | 5250 140<sup>th</sup> Ave North | Clearwater, FL 33760

Tel 727.535.0572 | Fax 727.535.9691 | www.trci.net

October 2013 | PB-LWH-06 | Rev.08

ISO 9001:2008