



TECHNICAL DATA SHEET
LITHIUM ION
RECHARGEABLE BATTERY

PBH-1601

High Capacity



BATTERY SPECIFICATIONS

Model No: PBH-1601	
Manufacturers CAGE Code: 03UN7	
Voltage Range: 3.0V min.; 3.6V nom.; 4.2V max.	
Nominal Capacity: 17.4Ah @ 500mA @ 23°C (74°F)	
Maximum Discharge: 3.5 A continuous @ 23°C (74°F)	
Maximum Pulse Discharge: 4.2A for 5 seconds @ 23°C (74°F)	
Energy: 63 Wh	
Energy Density: 187 Wh/kg, 383 Wh/l	
Weight: 349 grams (0.768 lbs.)	
Cycle Life: > 300 cycles @ C/5 to 80% of initial capacity @ 100% depth of discharge	
Operating Temp: -30°C to 60°C (-22°F to 140°F)	
Storage Temp: -20°C to 50°C (-4°F to 122°F)	
Self-Discharge: < 3% per month	
Housing: Hard plastic, black, Noryl, UL 94 V-0	
Connector – Flat contacts - Nickel A400 per ASTM B127	
Safety: See Material Safety Datasheet – MSDS062	
Transportation: See MSDS062	
Harmonized Tariff Code: 8507.80.0000	
Charging: Charge at constant voltage of 4.2 Volts maximum in a temperature range of 0°C to 45°C, limiting current to 4.0 A max, at 23°C, until current declines to 100mA	

APPLICATIONS

- Military Training Systems
- Military Radios
- Back-up Server Power
- Ruggedized Portable Electronics

KEY FEATURES



- High energy density
- Long cycle life
- Lightweight

COMPATIBLE CHARGERS

- PC-6150M 15-bay tactical portable charger



TECHNICAL DATA SHEET
LITHIUM ION
RECHARGEABLE BATTERY

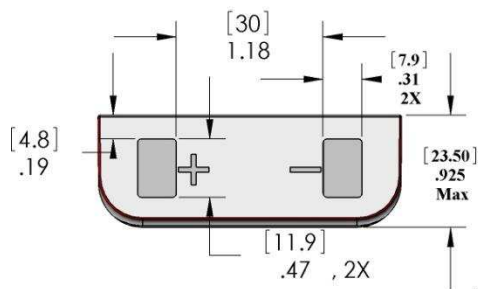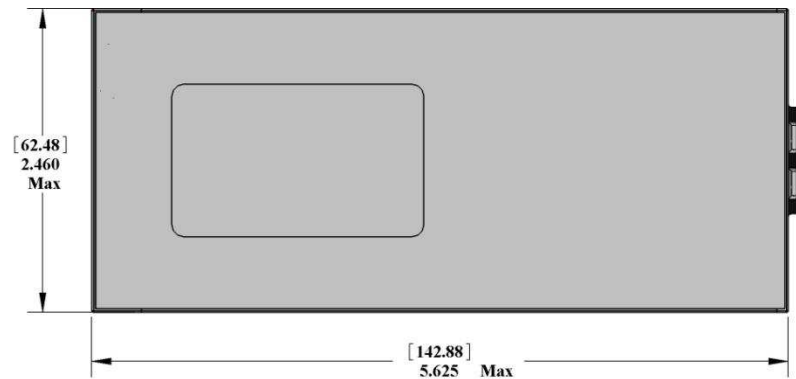

Dimension in: inches [mm]