

Small size, low profile model package
SERIAL-INTERFACE REAL TIME CLOCK MODULE

RX - 4574 LC

- Built in frequency adjusted 32.768 kHz crystal unit.
- Interface Type : 3-wire serial interface
- Operating voltage range : 1.6 V to 5.5 V
- Wide Timekeeper voltage range : 1.3 V to 5.5 V
- Low backup current : 0.35 μ A / 3 V (Typ.)
- 32.768 kHz frequency output function : C-MOS output With Control Pin
- The various functions include full calendar, alarm, timer.



Product Number (Please contact us)
RX-4574LC : Q414574C2000300




Actual size



Block diagram

Overview

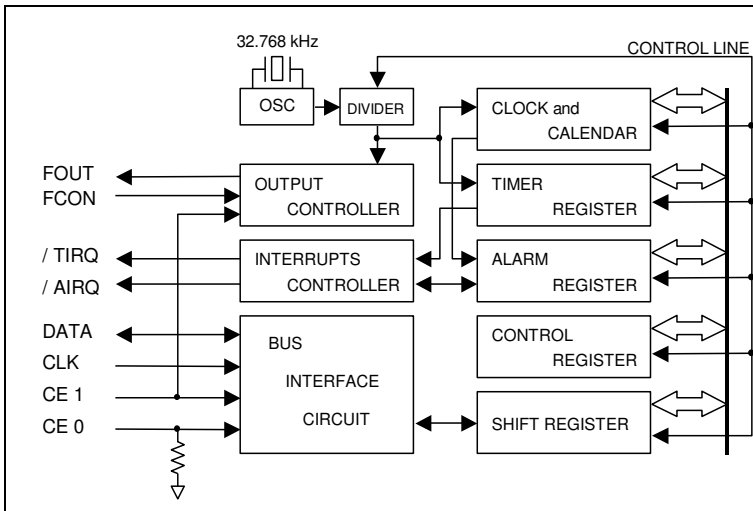


- **32.768 kHz frequency output function**
 - FOUT pin output (C-MOS output), CL=30 pF
 - Output frequency is selectable from 1/30 Hz to 32.768 kHz (32 Values)
 - **Timer function**
 - Timer function which can be set up between 1/4096 second and 255 minutes.
 - It is recorded automatically to TF-bit at the time of event occurrence, and it's possible to output with /TIRQ pin output (open-drain output).
 - Selectable one time mode or repeat mode.
 - **Alarm function**
 - Alarm function can be set to any combination of day of week, hour, or minute.
 - It is recorded automatically to AF-bit at the time of event occurrence, and it's possible to output with /AIRQ pin output (open-drain output).
- * Functions are compatible with RTC-4574 SA / JE / NB.

Pin Function

Terminal connection / External dimensions (Unit:mm)

| Signal Name | Input / Output | Function |
|-----------------|----------------|--|
| CE0 | Input | The chip enabled input pin 0. (Built-in pull-down resistance) When both CE0 and CE1 pins are at the "H" level, access to this Real time clock module becomes possible. |
| CE1 | Input | The chip enabled input pin 1. When the CE1 pin is at the HIGH level, the FOUT pin is in the output state. |
| CLK | Input | The shift clock input pin for serial data transfer. |
| DATA | Bi-directional | The data input / output pin for serial data transfer. |
| FOUT | Output | This pin outputs the reference clock signal at 32.768 kHz (C-MOS output). High impedance at the time of output off. |
| FCON | Input | The input pin for the FOUT output control. |
| / AIRQ | Output | The open drain output pin for alarm and time update interrupts. |
| / TIRQ | Output | The open drain output pin for timer interrupt. |
| V _{DD} | — | Connected to a positive power supply. |
| GND | — | Connected to a ground. |

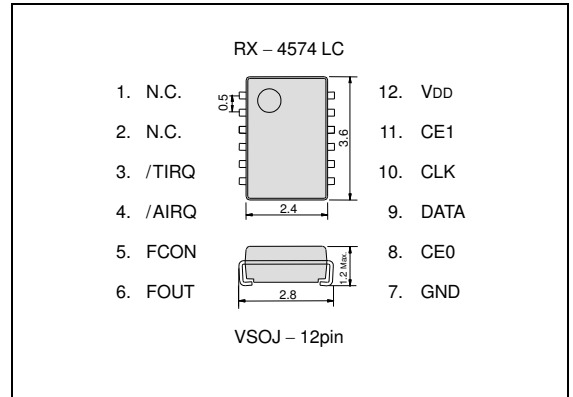

Specifications (characteristics)

* Refer to application manual for details.

■ Recommended Operating Conditions

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------|------------------|-----------|------|------|------|------|
| Power voltage | V _{DD} | — | 1.6 | 3.0 | 5.5 | V |
| Clock voltage | V _{CLK} | — | 1.3 | 3.0 | 5.5 | V |
| Operating temperature | T _{OPR} | — | -40 | +25 | +85 | °C |

■ Frequency characteristics

| Item | Symbol | Condition | Rating | Unit |
|---------------------------|------------------|--|----------|--------------------|
| Frequency tolerance | $\Delta f / f$ | T _a = +25 °C V _{DD} = 3.0 V | 5 ± 23 * | × 10 ⁻⁶ |
| Oscillation Start-up time | t _{STA} | T _a = +25 °C V _{DD} = 1.6 V | 1 Max. | s |
| | | T _a = -40 °C to +85 °C V _{DD} = 1.6 V | 3 Max. | s |

*Equivalent to 1 minute of monthly deviation

■ Current consumption characteristics

T_a = -40 °C to +85 °C

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---------------------|------------------|--|-----------------------|------|------|---------|
| Current Consumption | I _{BK} | CE0, CE1 = GND FOUT ;output OFF (Hi - z) | V _{DD} = 5 V | 0.45 | 0.9 | μ A |
| | | V _{DD} = 3 V | 0.35 | 0.7 | | |
| | I _{32k} | CE0 = GND CE1 = V _{DD} FOUT ; 32.768 kHz output ON CL = 30 pF | V _{DD} = 5 V | 8.0 | 20.0 | μ A |
| | | | V _{DD} = 3 V | 5.0 | 12.0 | |