

UL FILE #194432

MATERIAL:

POLYCARBONATE, TRANSPARENT BLUE


UL94V-2 FLAMMABILITY RATING

UV STABILIZED


SERVICE TEMPERATURE RANGE:

-40°C TO +120°C


(*) MOUNTING BOSSES USE EITHER M2.5 METRIC OR #4 STD. SHEET METAL SCREWS x 0.188" LG. (NOT SUPPLIED)

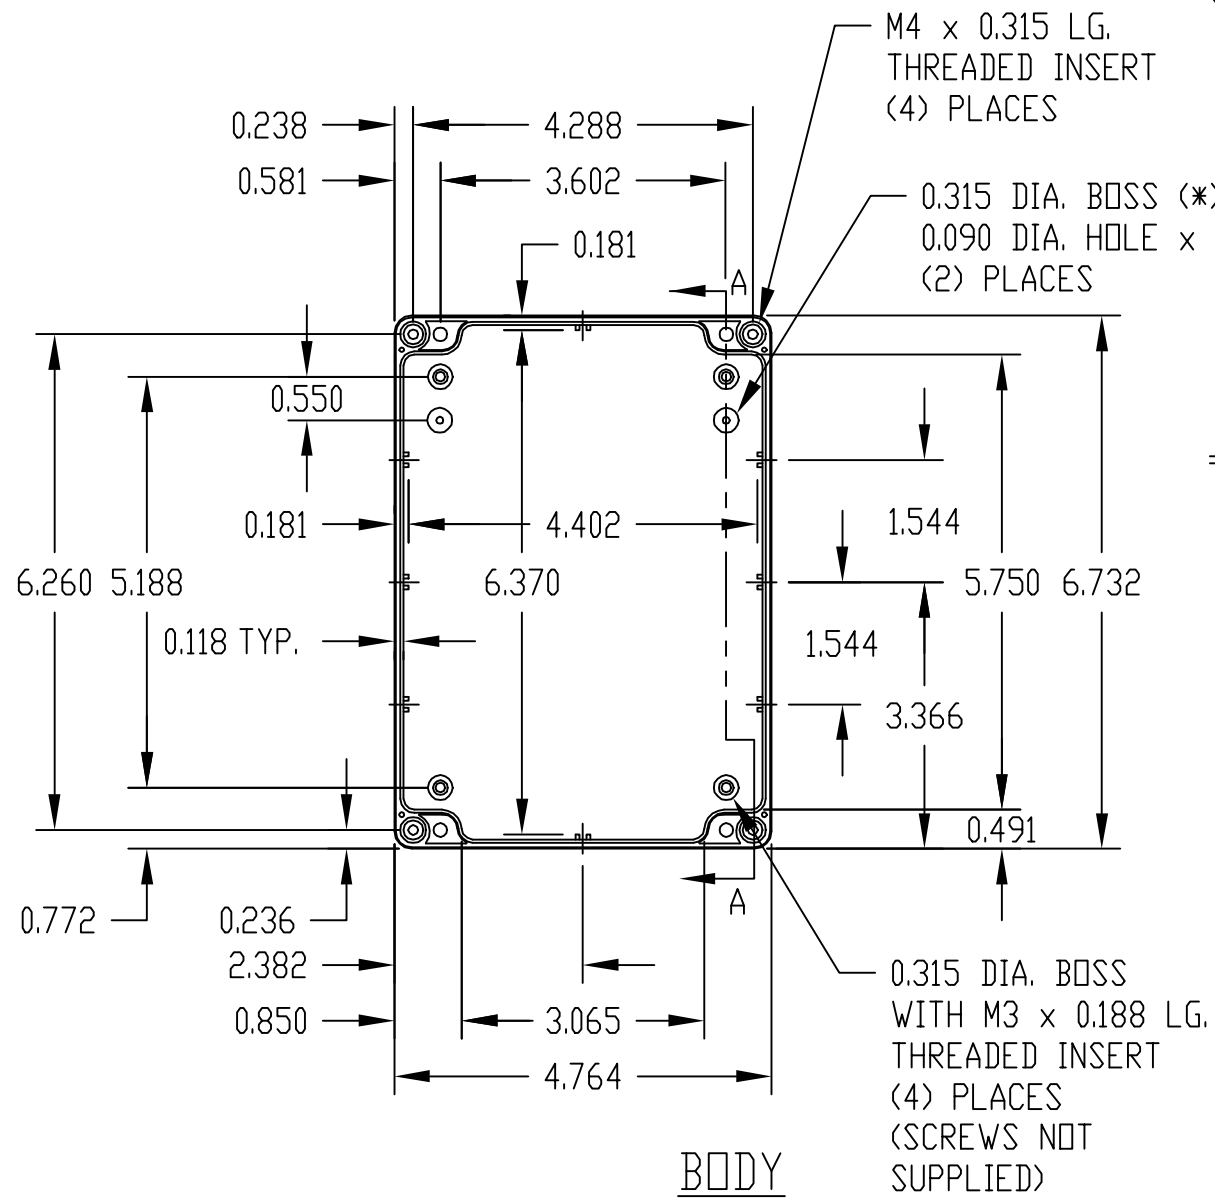


BODY

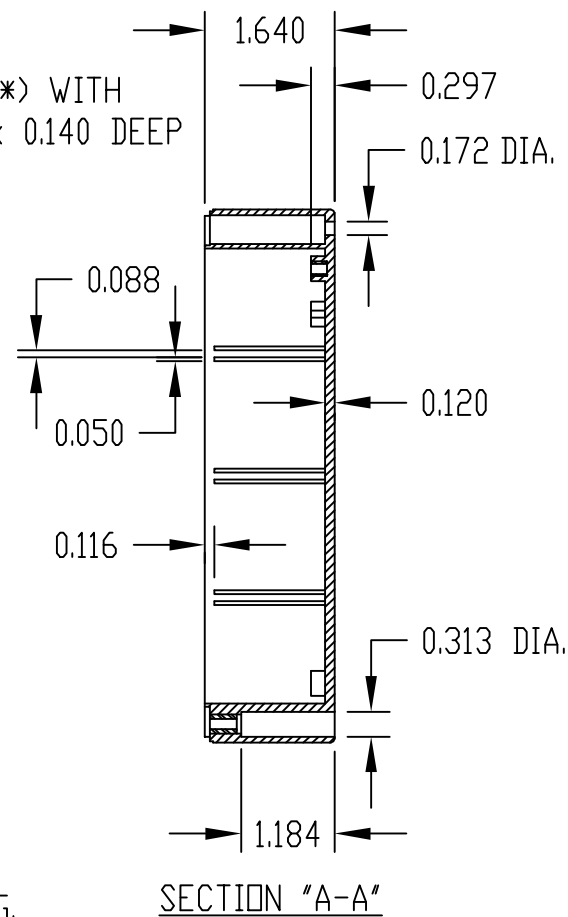

SECTION "A-A"

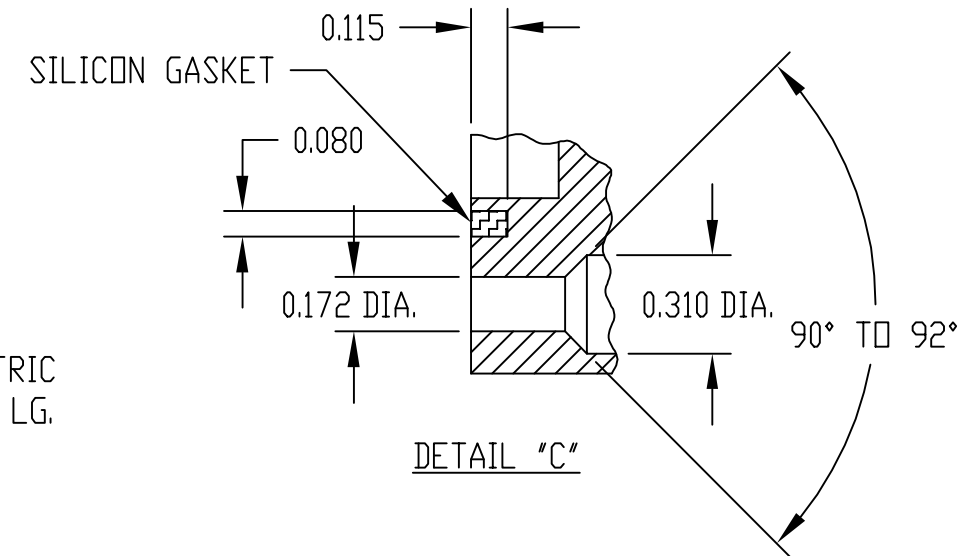

DETAIL "C"

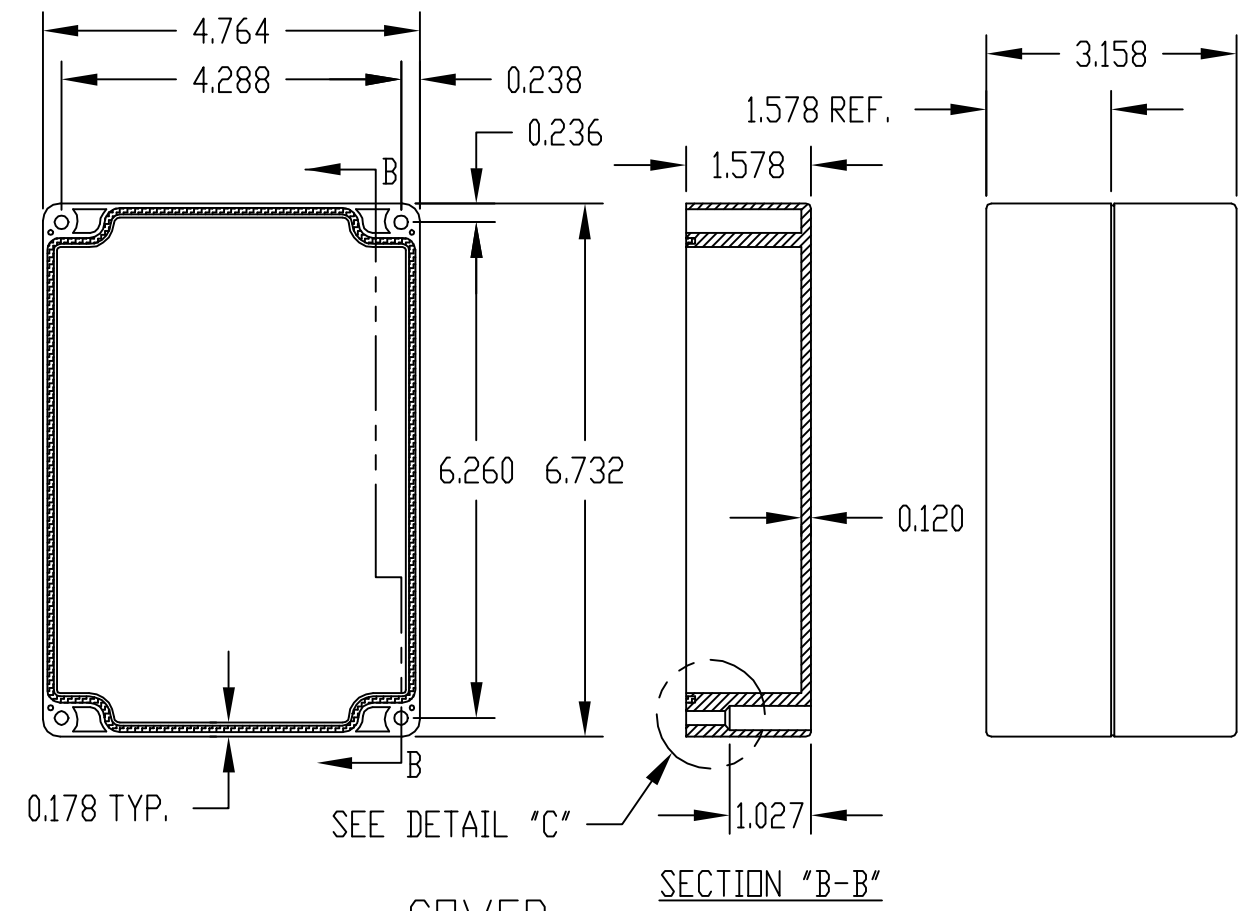

COVER

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

HARDWARE KIT
KIT CONTAINS (4) M4 x 20mm (0.787") LG. SCREWS FOR ASSEMBLY