
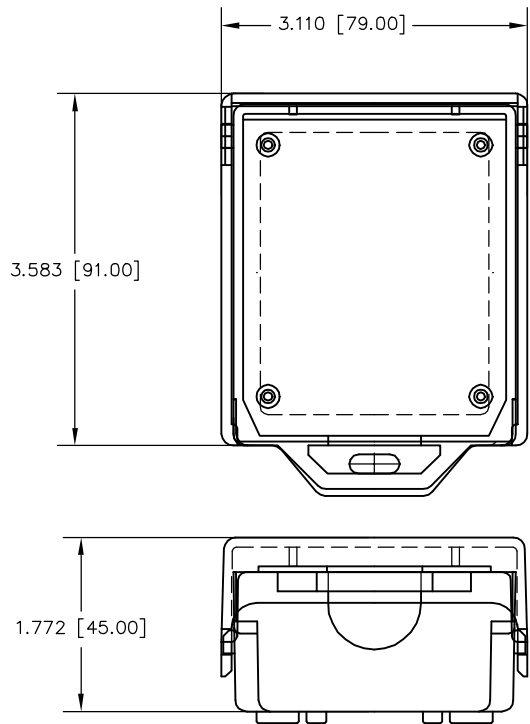
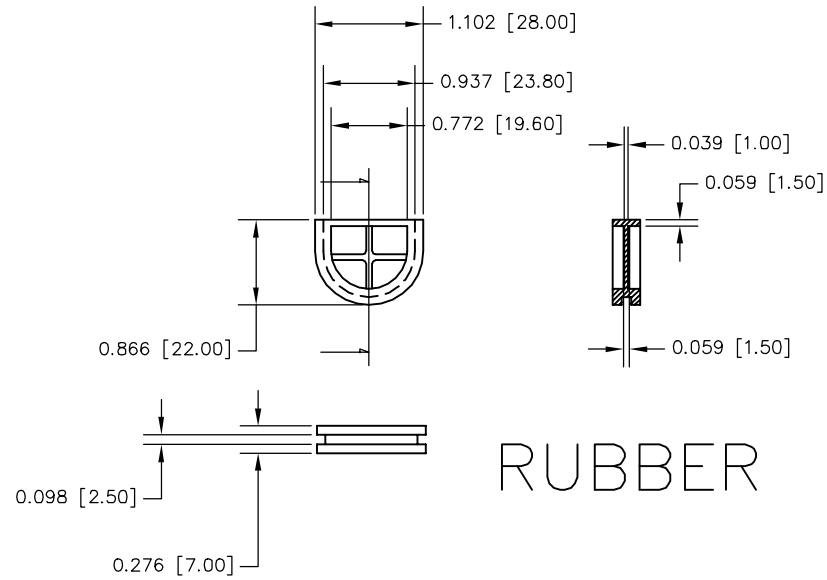


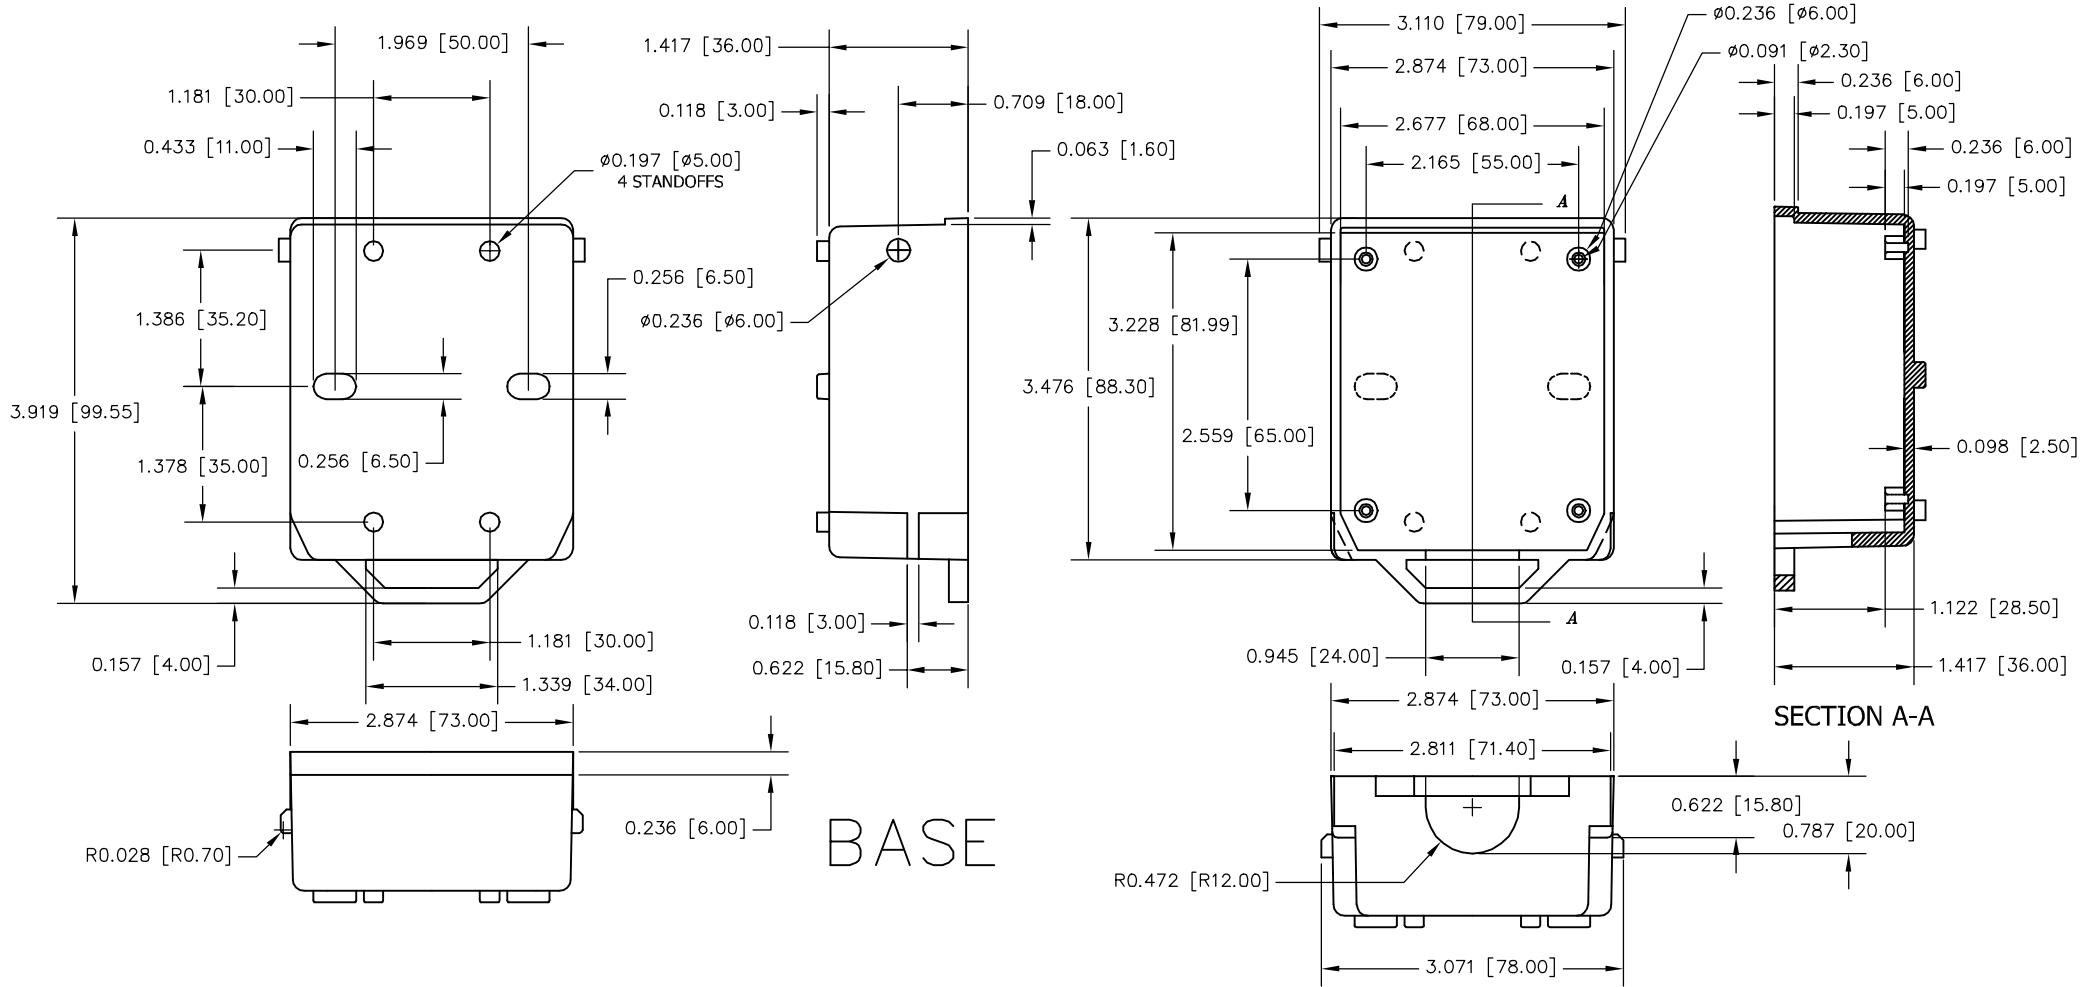

- * MATERIAL : HIGH IMPACT OF UL94-HB ABS
* ORDER BY PART NUMBER BELOW, LIGHT GREY OR BLACK COLOR:
PTH - 11810 - G: GREY
PTH - 11810 - B: BLACK
* FINISH:
BASE: SMOOTH
LID: TEXTURED WITH SMOOTH RECESSED AREA.
* SNAP-IN DESIGN CAN BE OPENED AND CLOSED EASILY WITHOUT A TOOL
* CABLE ENTRY RUBBER CAN BE CUT EASILY WITH A KNIFE FOR CABLE CONNECTION
* 4 INTERNAL BOSSES ARE AVAILABLE FOR PCB ASSEMBLY. USE M2.5 OR #4 STD SHEET METAL SCREWS.
* IDEALLY USED FOR INDOOR/OUTDOOR TELECOMMUNICATION DEVICE.
* ALL DIMENSIONAL TOLERANCES ARE .015

		ITEM REQ'D	PART NO.		DESCRIPTION			
QTY.	USED ON	TOLERANCES:		MAT:	AS NOTED	SCALE:	NAME:	
		±.005 BETWEEN HOLE CENTERS		FINISH:	NOTED		HINGED PLASTIC BDX	
		±.015 FROM SHEARED EDGE		DR. RD	10-13-08			3.58 X 3.11 X 1.77
		±.032 FROM A BENT SURFACE		CH.				
		±.063 BETWEEN ASSEMBLED SURFACES		APP.				
		UNLESS OTHERWISE SPECIFIED				WILLOUGHBY, OHIO	DWG. NO.	PTH-11810