

# NX7539BB-AA

## Data Sheet

LASER DIODE

R08DS0008EJ0300

Rev.3.00

1 550 nm InGaAsP MQW-FP LASER DIODE COAXIAL MODULE FOR OTDR APPLICATION

Sep 19, 2010

### DESCRIPTION

<R>

The NX7539BB-AA is a 1 550 nm Multiple Quantum Well (MQW) structured Fabry-Perot (FP) laser diode coaxial module with single mode fiber. This module is specified to operate under pulsed condition and designed for light source of Optical Time Domain Reflectometer (OTDR).

### FEATURES

- High output power  $P_r = 40 \text{ mW} @ I_{FP} = 400 \text{ mA}^{*1}$
- Long wavelength  $\lambda_c = 1 550 \text{ nm}$

\*1 Pulse Conditions: Pulse width (PW) = 10  $\mu\text{s}$ , Duty = 1%

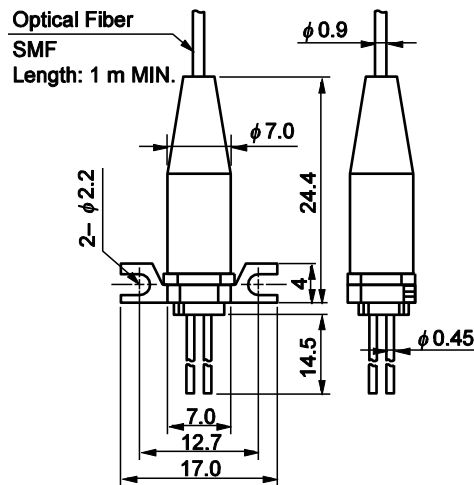
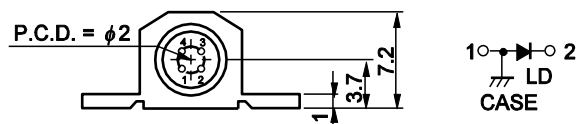


The mark <R> shows major revised points.

The revised points can be easily searched by copying an "<R>" in the PDF file and specifying it in the "Find what:" field.

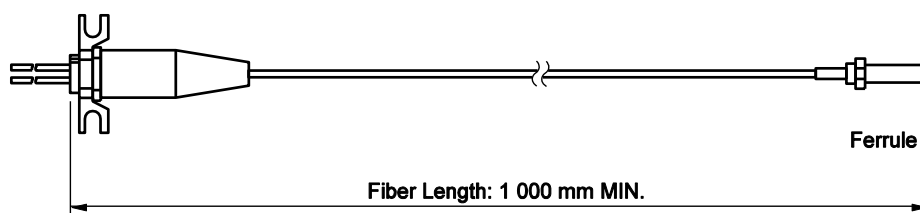
**NX7539BB-AA**

&lt;R&gt;

**PACKAGE DIMENSIONS (UNIT: mm)****PIN CONNECTIONS****OPTICAL FIBER CHARACTERISTICS**

Parameter	Specification	Unit
Mode Field Diameter	9.3±0.5	$\mu\text{m}$
Cladding Diameter	125±2	$\mu\text{m}$
Maximum Cladding Noncircularity	2	%
Maximum Core/Cladding Concentricity	1.6	%
Outer Diameter	0.9±0.1	mm
Cut-off Wavelength	1 140 to 1 280	nm
Minimum Fiber Bending Radius	30	mm
Fiber Length	1 000 MIN.	mm

&lt;R&gt;



**NX7539BB-AA****ORDERING INFORMATION**

Part Number	Flange Type
NX7539BB-AA	flat mount flange

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Ratings	Unit
Pulsed Forward Current <sup>*1</sup>	$I_{FP}$	600	mA
Reverse Voltage	$V_R$	2.0	V
Operating Case Temperature	$T_C$	-20 to +60	°C
Storage Temperature	$T_{stg}$	-40 to +85	°C
Lead Soldering Temperature	$T_{slid}$	350 (3 sec.)	°C
Relative Humidity (noncondensing)	RH	85	%

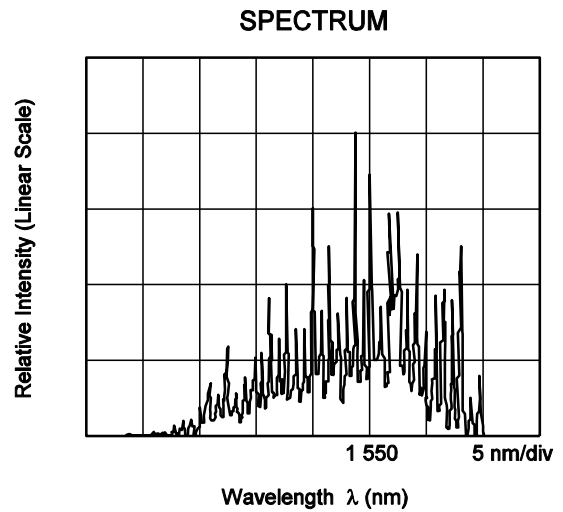
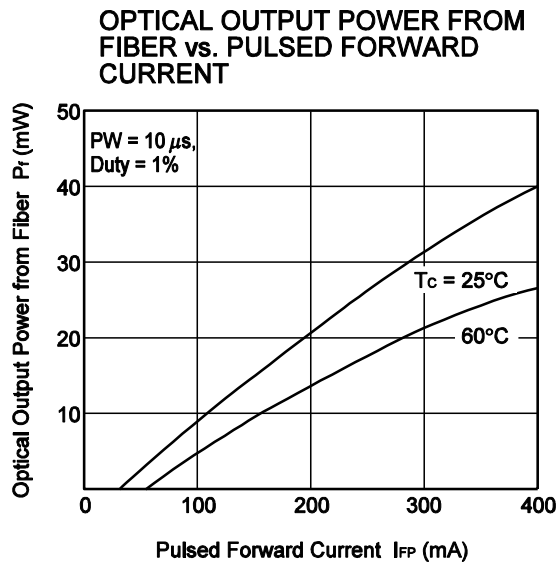
<sup>\*1</sup> Pulse Condition: Pulse Width (PW) = 10  $\mu$ s, Duty = 1%

**ELECTRO-OPTICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ )**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Forward Voltage	$V_{FP}$	$I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%		2.5	4.0	V
Threshold Current	$I_{th}$			40	50	mA
Optical Output Power from Fiber	$P_f$	$I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%	20	40		mW
Center Wavelength	$\lambda_C$	RMS (-20 dB), $I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%	1 530	1 550	1 570	nm
Spectral Width	$\sigma$	RMS (-20 dB), $I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%		6.0	10.0	nm
Rise Time	$t_r$	10-90%			2.0	ns
Fall Time	$t_f$	90-10%			2.0	ns

**ELECTRO-OPTICAL CHARACTERISTICS ( $T_C = 0\text{ to }+60^\circ\text{C}$ )**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Threshold Current	$I_{th}$				75	mA
Optical Output Power from Fiber	$P_f$	$I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%	10			mW
Center Wavelength	$\lambda_C$	RMS (-20 dB), $I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%	1 520		1 585	nm
Temperature Dependency of Center Wavelength	$\Delta\lambda/\Delta T$			0.35		nm/°C
Spectral Width	$\sigma$	RMS (-20 dB), $I_{FP} = 400\text{ mA}$ , PW = 10 $\mu$ s, Duty = 1%			10	nm

TYPICAL CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)

**Remark** The graphs indicate nominal characteristics.

**REFERENCE**


Document Name	Document No.
Opto-Electronics Devices Pamphlet <sup>*1</sup>	PX10160E

<sup>\*1</sup> Published by the former NEC Electronics Corporation.

## SAFETY INFORMATION ON THIS PRODUCT



## SEMICONDUCTOR LASER



AVOID EXPOSURE Invisible  
Laser Radiation is emitted from  
this aperture

<b>Warning</b>	Laser Beam	<p>A laser beam is emitted from this diode during operation. The laser beam, visible or invisible, directly or indirectly, may cause injury to the eye or loss of eyesight.</p> <ul style="list-style-type: none"> <li>• Do not look directly into the laser beam.</li> <li>• Avoid exposure to the laser beam, any reflected or collimated beam.</li> </ul>
<b>Caution</b>	GaAs Products	<p>This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.</p> <ul style="list-style-type: none"> <li>• Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below. <ol style="list-style-type: none"> <li>1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.</li> <li>2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.</li> </ol> </li> <li>• Do not burn, destroy, cut, crush, or chemically dissolve the product.</li> <li>• Do not lick the product or in any way allow it to enter the mouth.</li> </ul>
<b>Caution</b>	Optical Fiber	<p>A glass-fiber is attached on the product. Handle with care.</p> <ul style="list-style-type: none"> <li>• When the fiber is broken or damaged, handle carefully to avoid injury from the damaged part or fragments.</li> </ul>

<b>Revision History</b>	<b>NX7539BB-AA Data Sheet</b>
-------------------------	-------------------------------

Rev.	Date	Description	
		Page	Summary
–	Jul 2006	–	Previous No. : PL10607EJ02V0DS
3.00	Sep 19, 2010	p.1	Modification of photograph
		p.2, 3	Modification of <b>PACKAGE DIMENSIONS</b>

All trademarks and registered trademarks are the property of their respective owners.
---