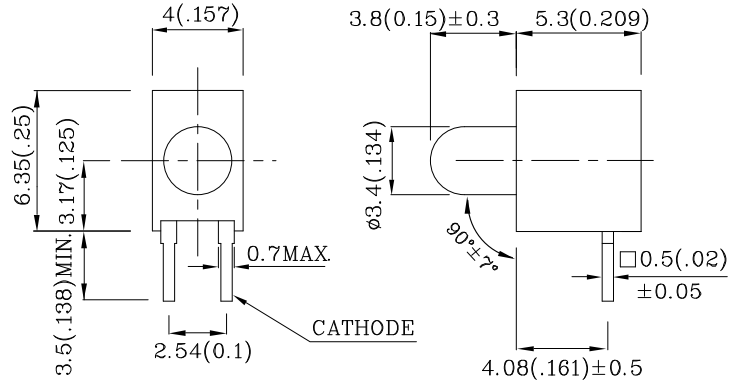


Features

- IDEAL FOR CARD EDGE STATUS INDICATION.
- I.C.COMPATIBLE.
- WIDE VIEWING ANGLE.
- HIGH RELIABILITY-LIFE MEASURED IN YEARS.
- UL RATING:94V-0
- HOUSING MATERIAL: TYPE 66 NYLON.
- RoHS COMPLIANT.




Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25(0.01") unless otherwise noted.
3. Specifications are subject to change without notice.






| Absolute Maximum Ratings (TA=25°C) | | MR (GaAlAs) | Unit |
|--|---------------------|----------------|------|
| Forward Current | IF | 30 | mA |
| Forward Current (Peak) 1/10 Duty Cycle 0.1ms Pulse Width | iFS | 155 | mA |
| Power Dissipation | PT | 75 | mW |
| Operating Temperature | TA | -40 ~ +85 | °C |
| Storage Temperature | Tstg | -40 ~ +85 | |
| Lead Solder Temperature [2mm Below Package Base] | 260°C For 3 Seconds | | |
| Lead Solder Temperature [5mm Below Package Base] | 260°C For 5 Seconds | | |

| Operating Characteristics (TA=25°C) | | MR (GaAlAs) | Unit |
|---|-----|----------------|------|
| Forward Voltage (Typ.) (IF=20mA) | VF | 1.85 | V |
| Forward Voltage (Max.) (IF=20mA) | VF | 2.5 | V |
| Reverse Current (Max.) (VR=5V) | IR | 10 | uA |
| Wavelength Of Peak Emission (Typ.) (IF=20mA) | λ P | 660 | nm |
| Wavelength Of Dominant Emission (Typ.) (IF=20mA) | λ D | 640 | nm |
| Spectral Line Full Width At Half-Maximum (Typ.) (IF=20mA) | Δλ | 20 | nm |
| Capacitance (Typ.) (VF=0V, f=1MHz) | C | 45 | pF |


| Part Number | Emitting Color | Emitting Material | Lens-color | Luminous Intensity (IF=20mA) | | Wavelength nm λ P | Viewing Angle 2 θ 1/2 |
|--|----------------|-------------------|--------------|---------------------------------|------|-------------------------|--------------------------|
| | | | | min. | typ. | | |
| XVQ1LMR41D | Red | GaAlAs | Red Diffused | 70 | 198 | 660 | 60° |
| Published Date :JAN 25,2008 Drawing No : XDSA2819 V4 Checked : B.L.LIU P.1/4 | | | | | | | |

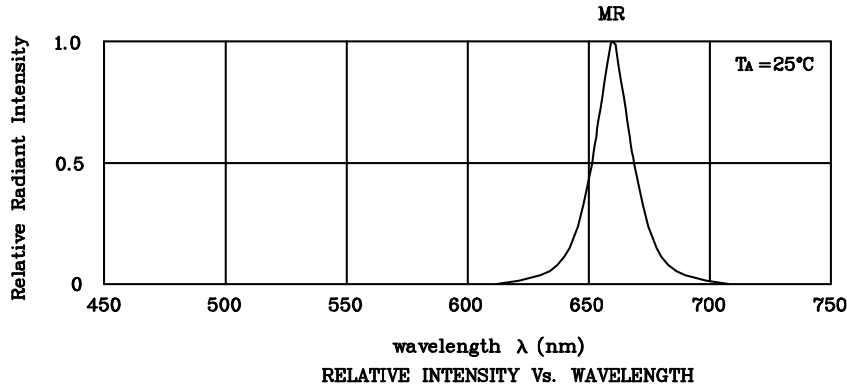

❖ MR

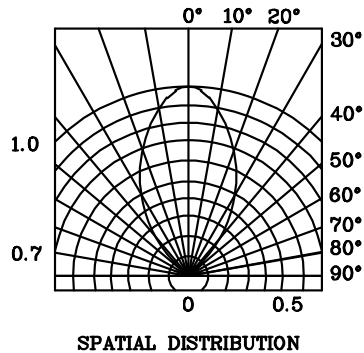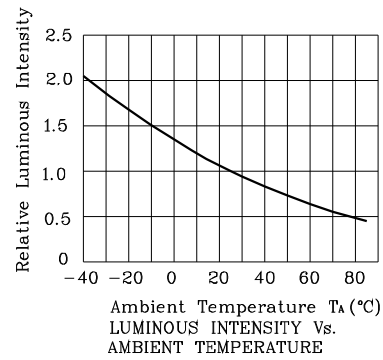

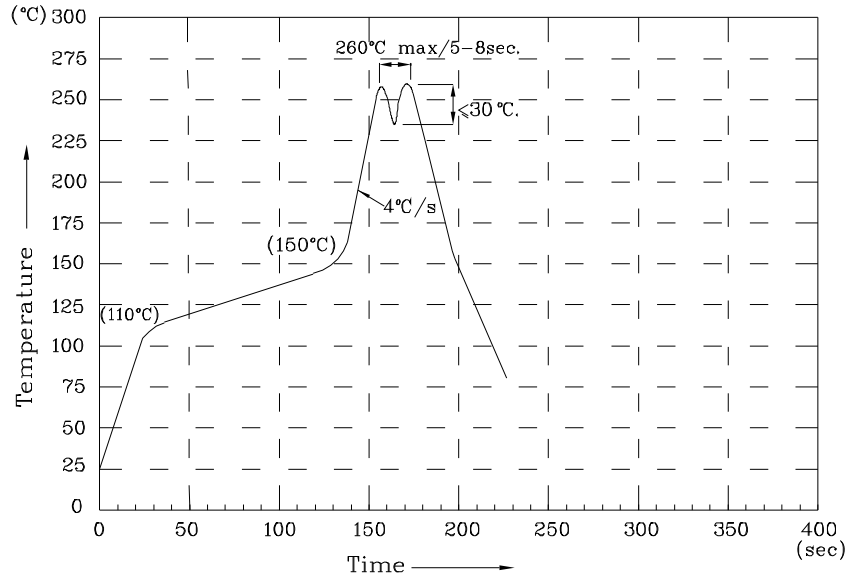Wave Soldering Profile For Lead-free Through-hole LED.



NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:

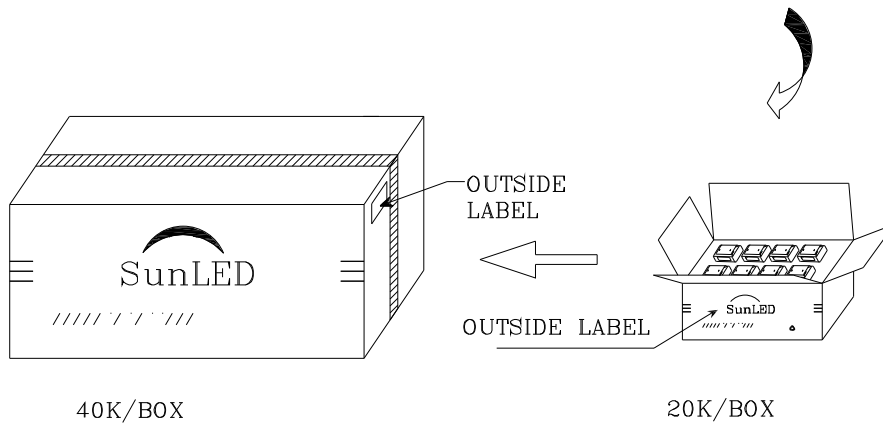
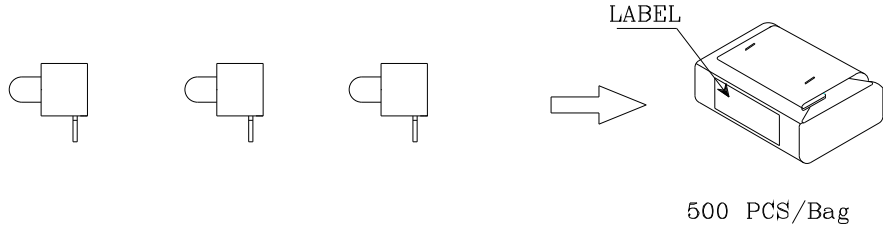

If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:



1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

XVQ1LMR41D

| | |
|--|-----------|
|  | |
| P/NO : XVQ1Lxx41x | |
| QTY : 500 pcs | CODE: XXX |
| S/N : XX | |
| LOT NO: | |
|  XXXXXXXXXXXXXXXXXXXXXXXX | |
| RoHS Compliant | |