
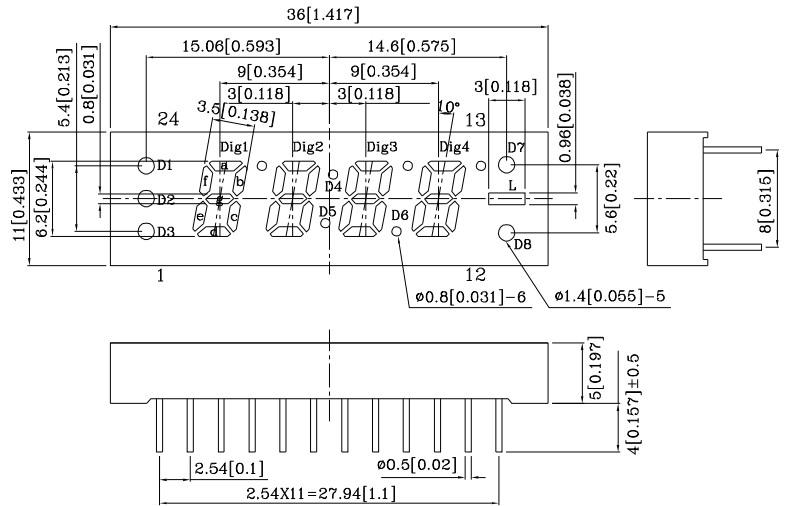


Features

- 0.25 INCH DIGIT HEIGHT.
- LOW CURRENT OPERATION.
- EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- I.C. COMPATIBLE.
- CATEGORIZED FOR LUMINOUS INTENSITY.
- MECHANICALLY RUGGED.
- STANDARD : GRAY FACE, WHITE SEGMENT.
- RoHS COMPLIANT.

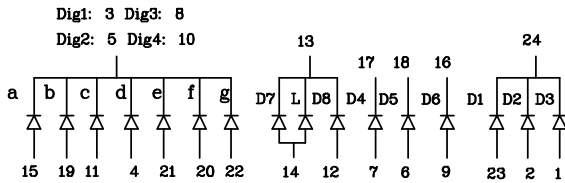


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
3. Specifications are subject to change without notice.





| Absolute Maximum Ratings (TA=25°C) | | MR (GaAlAs) | Unit |
|-------------------------------------------------------------------|---------------------------------------------------------|-----------------------|------|
| Reverse Voltage | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | V _R | 5 |
| | D7,L | | |
| Forward Current | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | I _F | 30 |
| | D7,L | | 60 |
| Forward Current (Peak) 1/10 Duty Cycle 0.1ms Pulse Width | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | i _{FS} | 155 |
| | D7,L | | 310 |
| Power Dissipation | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | P _T | 75 |
| | D7,L | | 150 |
| Operating Temperature | TA | -40 ~ +85 | °C |
| Storage Temperature | T _{stg} | -40 ~ +85 | |
| Lead Solder Temperature [2mm Below Package Base] | | 260°C For 3~5 Seconds | |

| Operating Characteristics (TA=25°C) | | | MR (GaAlAs) | Unit |
|--------------------------------------------------------------|---------------------------------------------------------|----------------|----------------|--------|
| Forward Voltage (Typ.) (IF=10mA) | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | V _F | 1.8 | V |
| | D7,L | | | |
| Forward Voltage (Max.) (IF=10mA) | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | V _F | 2.5 | V |
| | D7,L | | | |
| Reverse Current (Max.) (VR=5V) | Dig1'8,'Dig2'8',Dig3'8',Dig4'8' D1,D2,D3,D4,D5,D6,D8 | I _R | 10 | uA |
| | D7,L | | 20 | |
| Wavelength of Peak (Typ.) Emission (IF=10mA) | | | λ _P | 660 nm |
| Wavelength of Dominant Emission (Typ.) (IF=10mA) | | | λ _D | 640 nm |
| Spectral Line Full Width (Typ.) At Half-Maximum (IF=10mA) | | | Δλ | 25 nm |
| Capacitance (Typ.) (VF=0V, f=1MHz) | | | C | 45 pF |

| Part Number | Emitting Color | Emitting Material | Luminous Intensity (IF=10mA) ucd | | Wavelength nm λ P | Description |
|-------------|----------------|-------------------|-------------------------------------|-------|---------------------------------|----------------|
| | | | min. | typ. | | |
| XDMR06C4-A | Red | GaAlAs | 8000 | 26790 | 660 | Common Cathode |




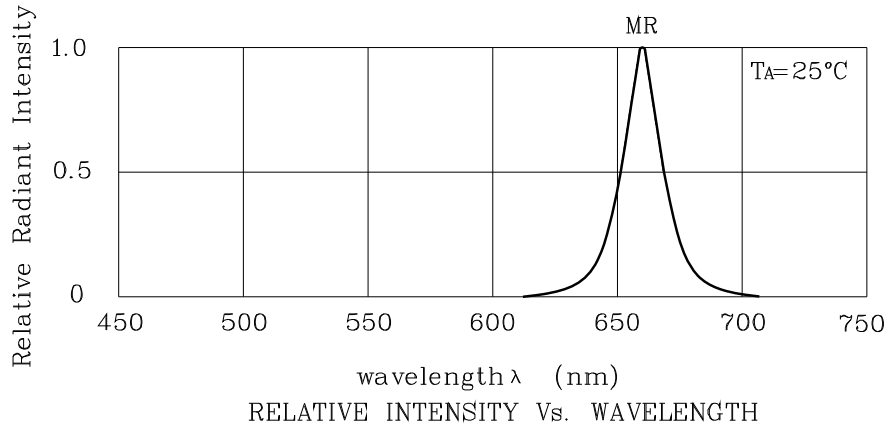


❖ MR

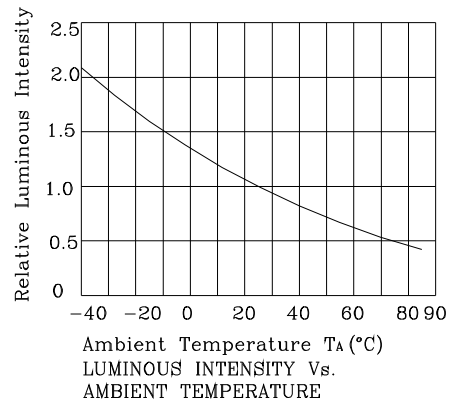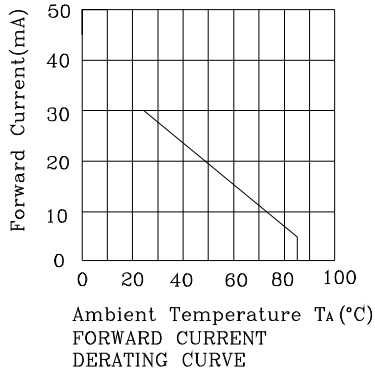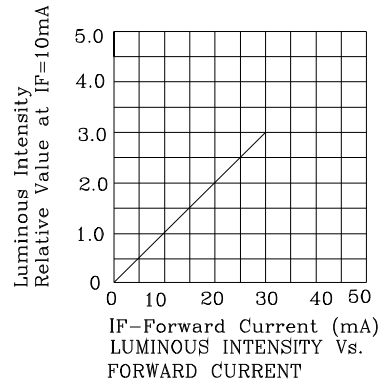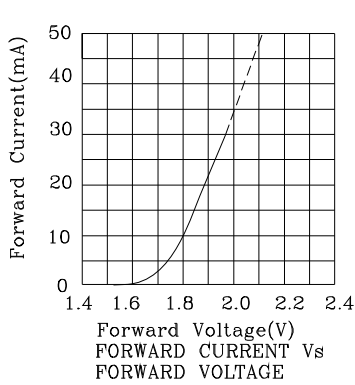




❖ MR

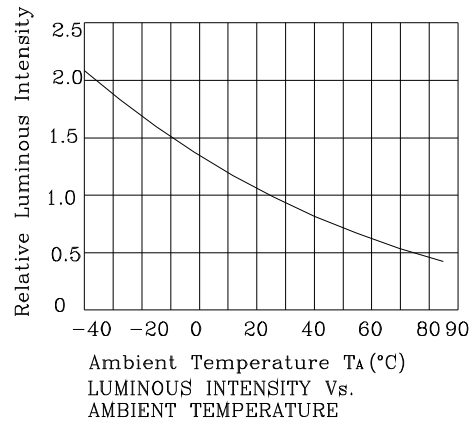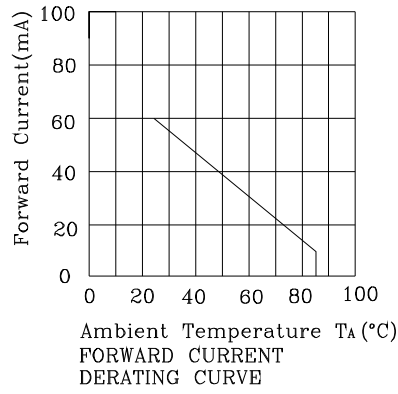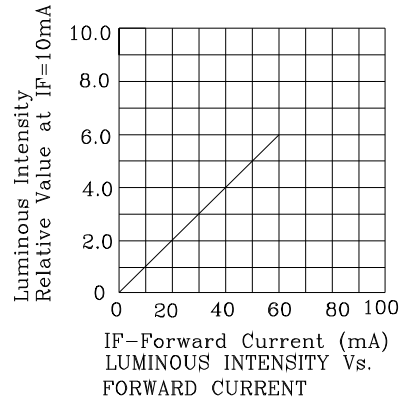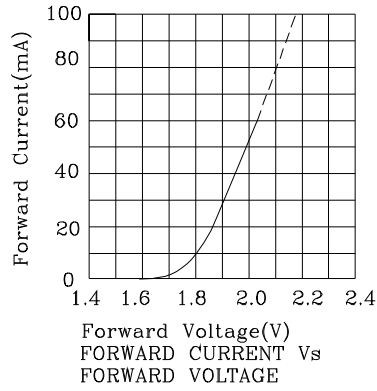

Wave Soldering Profile For Lead-free Through-hole LED.

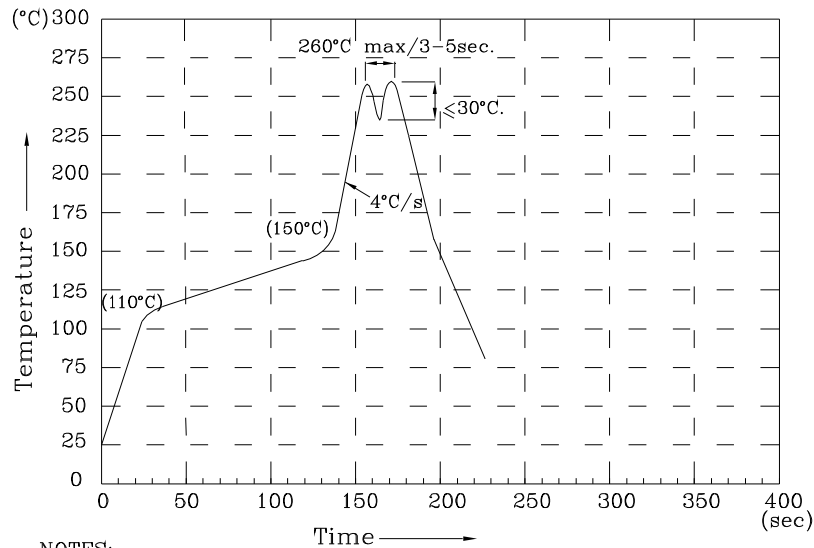

NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:


If special sorting is required (e.g. binning based on forward voltage, luminous intensity/ luminous flux or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity/ luminous flux: +/-15%
3. Forward Voltage: +/-0.1V


Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

XDMR06C4-A

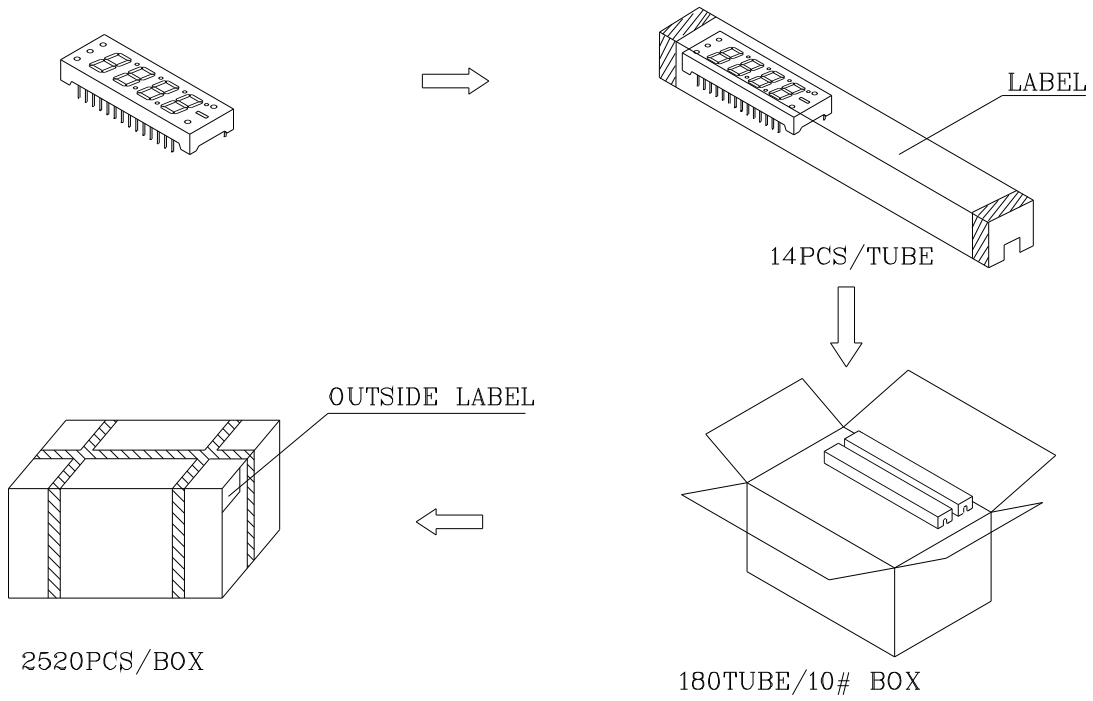

Inside LABEL Paste On The IC-tube

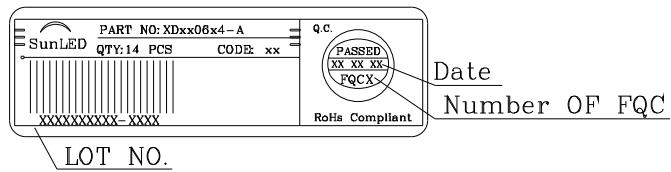

Outside LABEL Paste On The Box

