


■ Features

- SAW filter for wireless communication.
- Compact.(5.2 x 4.8mm)
- A low-loss filter.
- Excellent guaranteed attenuation.

Pb
Free


RoHS Compliant
Directive 2011/65/EU

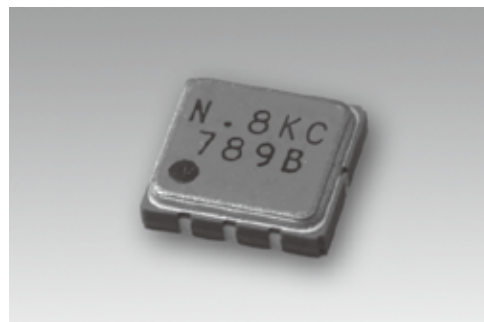

■ Specifications

Model		WF789B0260CE		
Item		min.	typ.	max.
Nominal frequency : f ₀ (MHz)		-	260.1	-
Minimum insertion loss (dB)		-	2.1	6.0
6-dB passband width (from the throughlevel)		-2.0	-	+2.0
In-band ripple at f ₀ ±2 MHz		-	1.0	2.2
Guaranteed attenuation (dB) (from the throughlevel)	236.7 to 240.7 MHz	50	60	-
	247.4 to 251.4 MHz	50	55	-
	268.8 to 272.8 MHz	45	53	-
	279.5 to 283.5 MHz	50	60	-
Operating temperature range (°C)		-10 to +50		
Terminating impedance (Ω)		50		

■ Dimensions

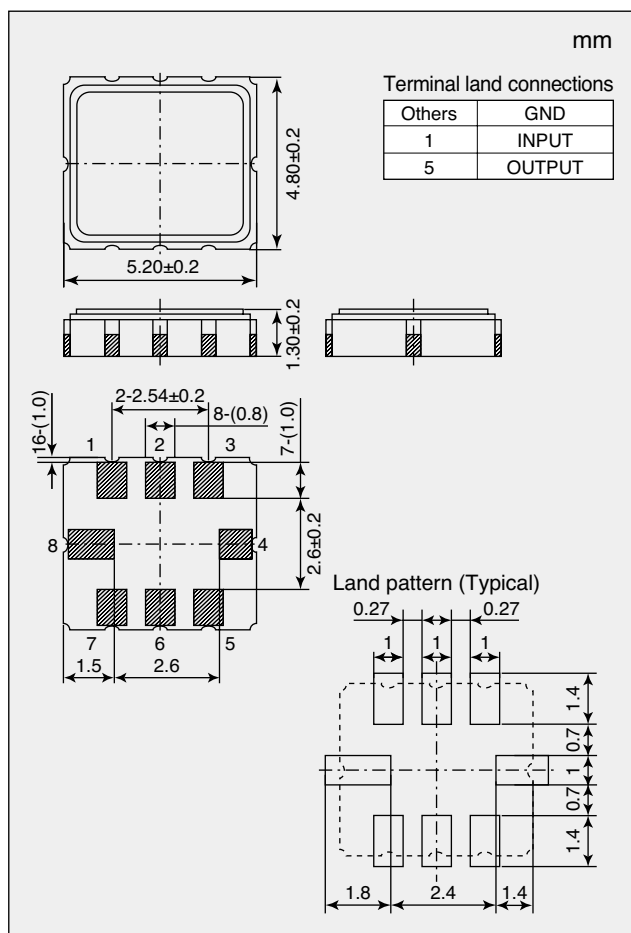

■ Characteristics

