

WF871P0426CD

For Short-range Wireless

■ Features

- SAW filter for specified low power radio.
- A filter with low insertion loss.
- Compact and light.

Pb
Free


RoHS Compliant
Directive 2011/65/EU



■ Specifications

Model		WF871P0426CD		
Item		min.	typ.	max.
Nominal frequency : f ₀ (MHz)		-	426	-
Maximum insertion loss (dB) at 425.5 to 426.5 MHz		-	1.2	2.0
Pass-band ripple (dB) at 425.5 to 426.5 MHz		-	0.15	1.0
VSWR at 425.5 to 426.5 MHz		-	1.3	2.0
Guaranteed attenuation (from the throughlevel)(dB)	404.6 MHz	50	55	-
	447.4 MHz	45	60	-
Operating temperature range (°C)		-20 to +70		
Terminating impedance (Ω)		50		

■ Dimensions

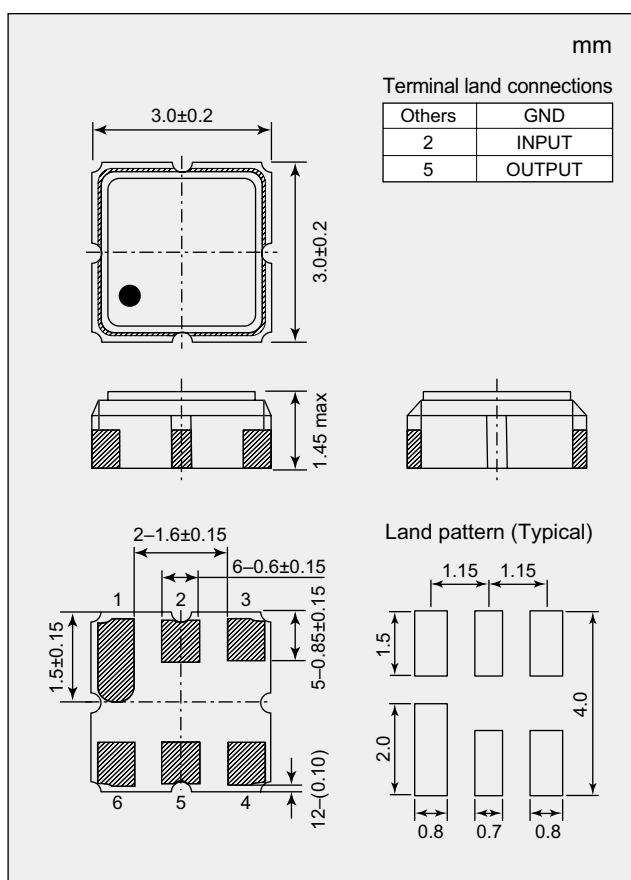

■ Characteristics

