


WF995C0365CD

For Short-range Wireless

■ Features

- SAW filter for land mobile radio system.
- A filter with low insertion loss.
- Compact and light.

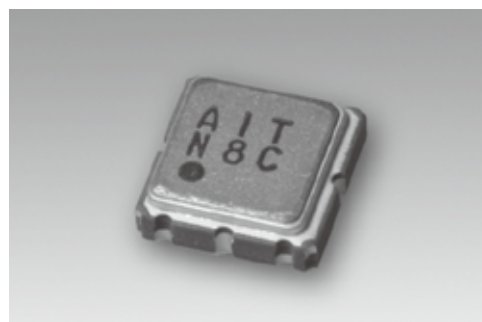


Pb
Free

RoHS Compliant
Directive 2011/65/EU

■ Specifications

Model		WF995C0365CD		
Item		min.	typ.	max.
Nominal frequency : f0 (MHz)		-	365	-
Maximum insertion loss (dB) at 360 to 370 MHz		-	2.0	3.0
Pass-band ripple (dB) at 360 to 370 MHz		-	0.8	2.0
VSWR at 360 to 370 MHz		-	1.7	2.0
Guaranteed attenuation (dB) (from the throughlevel)	325.8 MHz	27	60	-
	325.8 to 355 MHz	10	35	-
	378 to 400 MHz	10	20	-
	431 to 452 MHz	27	60	-
Operating temperature range (°C)		-30 to +70		
Terminating impedance (Ω)		50		

■ Dimensions

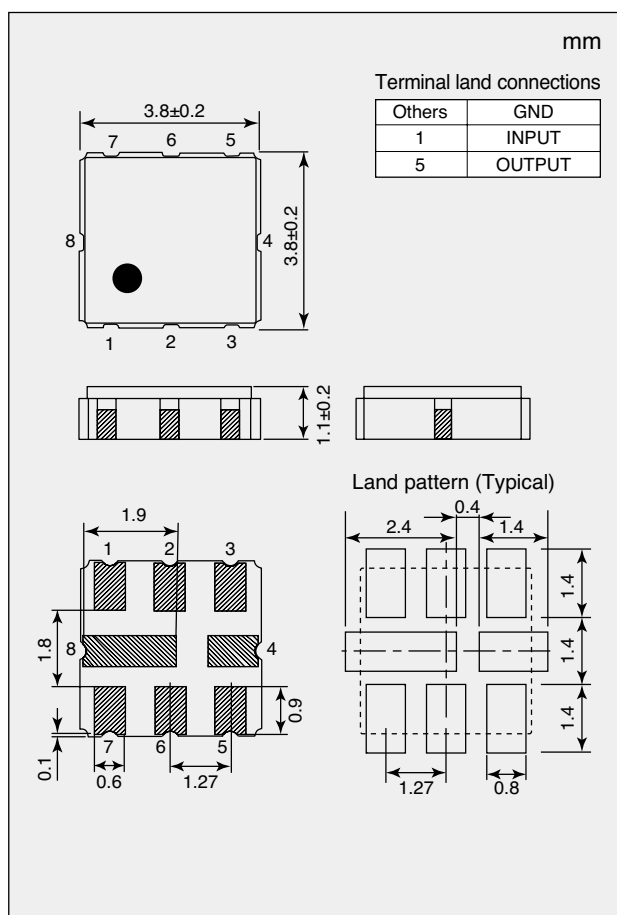

■ Characteristics

