

WFC33A0720CE

For Short-range Wireless

■ Features


- SAW filter for ITS.
- Low insertion loss.
- Compact and light.

Pb
FreeRoHS Compliant
Directive 2011/65/EU

■ Specifications

Model		WFC33A0720CE		
Item		min.	typ.	max.
Nominal frequency : fn (MHz)		–	720	–
minimum insertion loss (dB)		–	2.1	3.5
1-dB band width (MHz)		±4.25	±7.6	–
Pass-band ripple (dB)	Fn ± 4.25 MHz	–	0.6	1.5
Guaranteed attenuation (from the throughlevel)	Fn – 15 MHz	20	28	–
	Fn – 10 MHz	–	8	–
	Fn + 10 MHz	–	8	–
	Fn + 15 MHz	20	28	–
Operating temperature range (°C)		–20 to +85		
Impedance(Ω)		50		

■ Dimensions

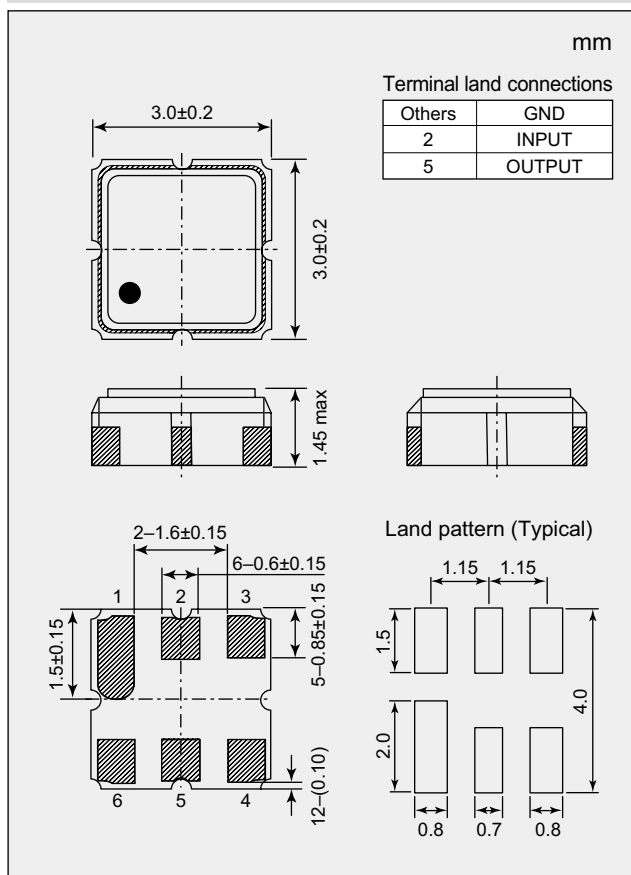

■ Characteristics

