

WFC33F0760CE

For Automotive

■ Features

- SAW filter for ITS.
- A low-loss filter.
- Compact and light.

Pb
Free


RoHS Compliant
Directive 2011/65/EU



■ Specifications

Model		WFC33F0760CE		
Item		min.	typ.	max.
Nominal frequency (MHz)		–	760	–
Maximum insertion loss (dB)		–	2.8	5.5
3.5dB Passband width		±4.15	±6.4	–
Guaranteed attenuation(dB)	Fn -15MHz	25	50	–
	Fn -10MHz	9	30	–
	Fn +10MHz	9	25	–
	Fn +15MHz	25	40	–
Operating temperature range (°C)		-25 to +85		
Input Impedance (Ω)		50 (Single)		
Output Impedance (Ω)		100 (Balance)		

■ Dimensions

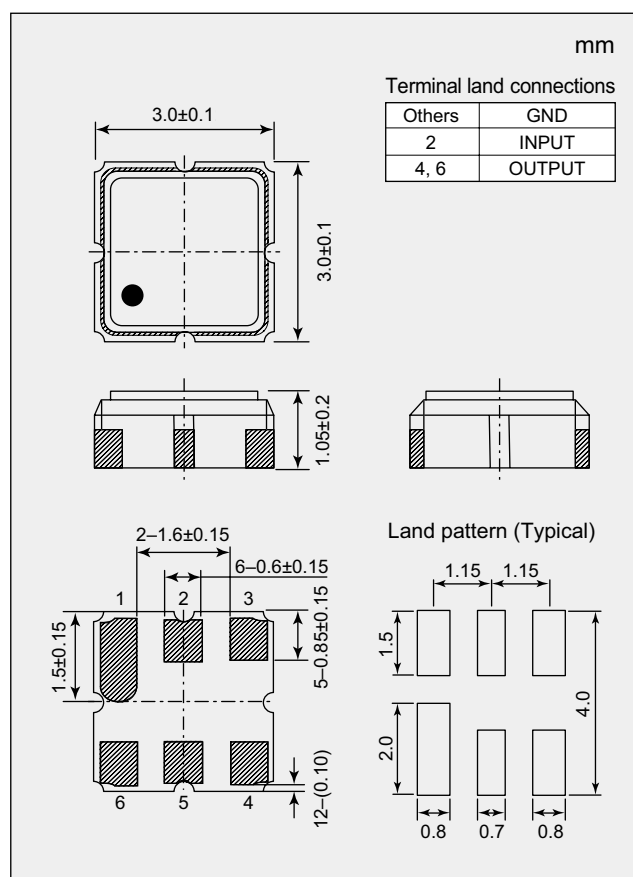

■ Characteristics

