

WFC48A0954CF

For Short-range Wireless

■ Features

- SAW Filter for RFID.
- Excellent out-band attenuation.
- Compact and light.

Pb
Free


RoHS Compliant
Directive 2011/65/EU



■ Specifications

Model		WFC48A0954CF		
Item		min.	typ.	max.
Nominal frequency : f0 (MHz)		-	954	-
Insertion loss (dB)		-	2.2	3.0
1dB Passband width (dB)		±4	±10	-
Guaranteed attenuation (dB)	40 to 915 MHz	40	50	-
	1025 to 1500 MHz	40	57	-
	1500 to 3000 MHz	20	32	-
Operating temperature range (°C)		-40 to +80		
impedance (Ω)		50		

■ Dimensions

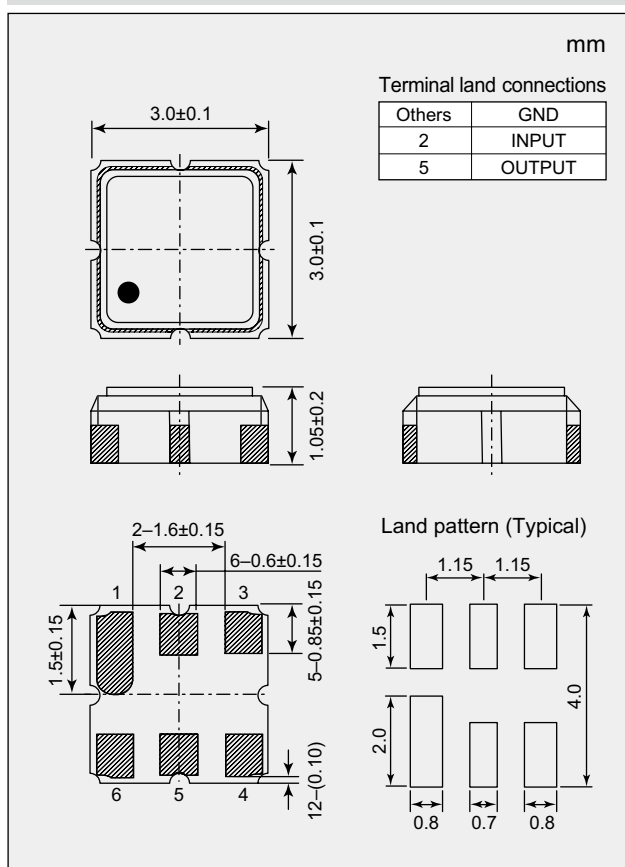

■ Characteristics

