

WFC93A0429CL

For Short-range Wireless

■ Features


- SAW filter for specified low power radio.
- A narrowband filter.
- Compact and light.

Pb
FreeRoHS Compliant
Directive 2011/65/EU

■ Specifications

Model		WFC93A0429CL		
Item		min.	typ.	max.
Nominal frequency : f0 (MHz)		–	429.55	–
Insertion loss (dB)	429.15 to 429.95 MHz	–	1.9	3.5
Ripple (dB)	429.15 to 429.95 MHz	–	0.2	1.5
Guaranteed attenuation (dB)	407.75 to 408.55 MHz	50	60	–
	450.55 to 451.35 MHz	50	60	–
Operating temperature range (°C)		–20 to +70		
Impedance		50		

■ Dimensions

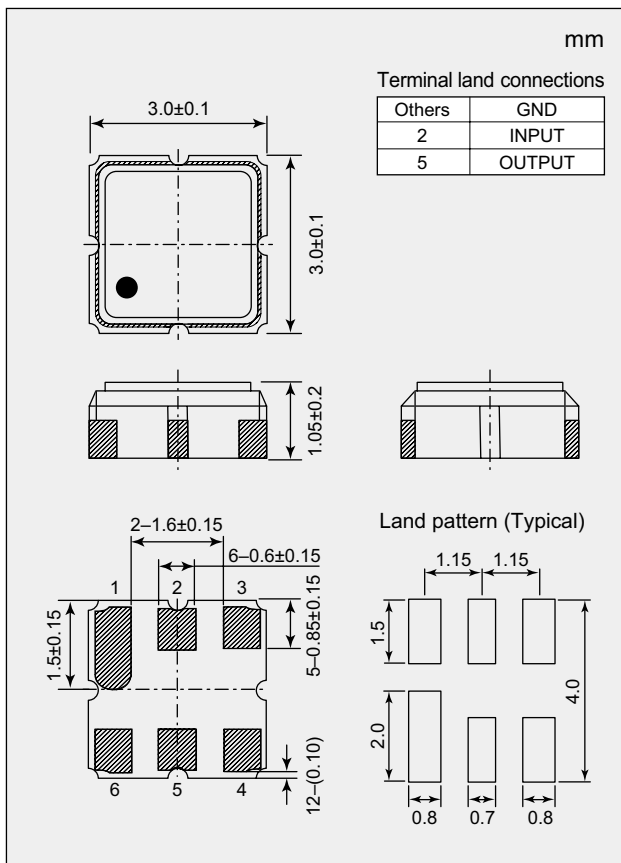

■ Characteristics

