

WFC93B0429CL

For Short-range Wireless

■ Features


- SAW filter for specified low power radio.
- A filter with low insertion loss.
- Compact and light.

Pb
FreeRoHS Compliant
Directive 2011/65/EU

■ Specifications

Model		WFC93B0429CL		
Item		min.	typ.	max.
Nominal frequency : f0 (MHz)		–	429.42	–
Insertion loss (dB)	428.92 to 429.92 MHz	–	1.9	3.5
Ripple (dB)	428.92 to 429.92 MHz	–	0.2	1.5
VSWR	428.92 to 429.92 MHz	–	1.5	2.5
Guaranteed attenuation (dB)	386.62 MHz	50	60	–
	408.02 MHz	50	60	–
Operating temperature range (°C)		–20 to +70		
Impedance		50		

■ Dimensions

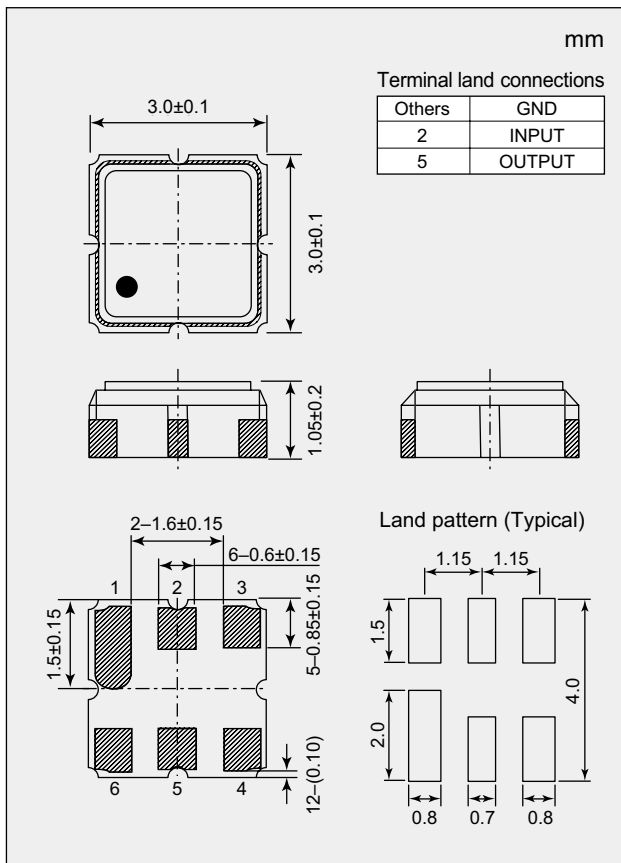

■ Characteristics

