




Units: mm

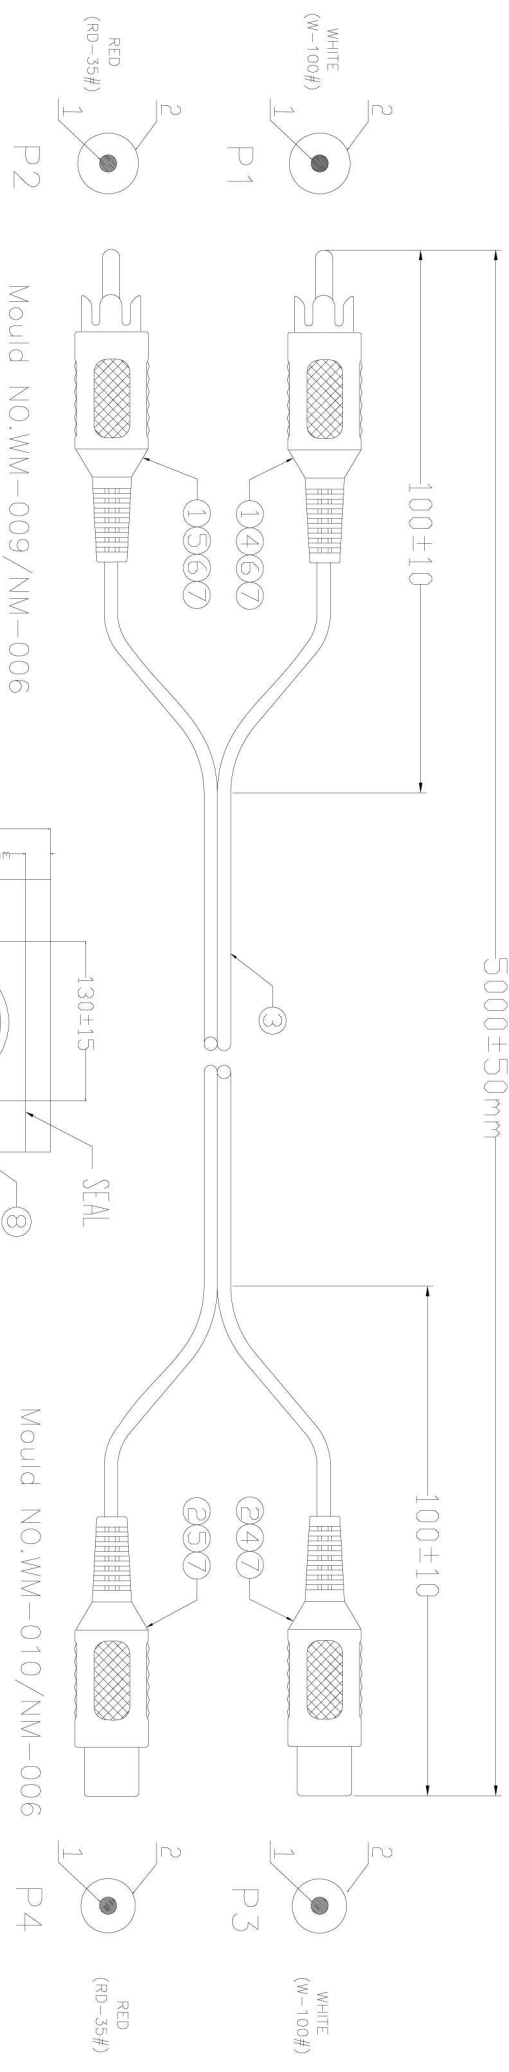

**PIN ASSIGNMENT:**

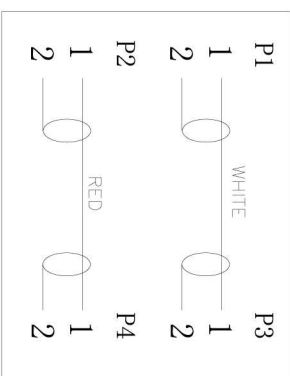

*Electrical test:*  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

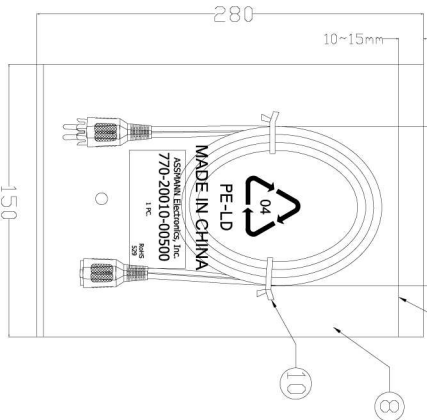

**NOTE:**  
 1. 小PE袋大PE袋对应料号, 包装袋数量及时间印刷样式:  
 CNC Tech, LLC  
 Industrial Cable and Connector Technology  
 770-20010-00500  
 5 PCS -  
 529 -  
 ROHS  
 印刷大PE袋料号  
 印刷对应的袋数  
 表示529件/09件/每次产品生产周期印

2. 外箱两个侧面ITEM NO后面各贴一个35\*22mm ROHS标签。

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS"
⑧	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO.NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR: BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR: BROWN
NO.	NAME	QTY	SPECIFICATION

<b>CNC Tech, LLC</b>			
Industrial Cable and Connector Technology			
DRAWN BY	LICHENG	DRAWING NO.	VG/LJQ-094-081-E
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00500
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITION	A/0	PROJECTION	