

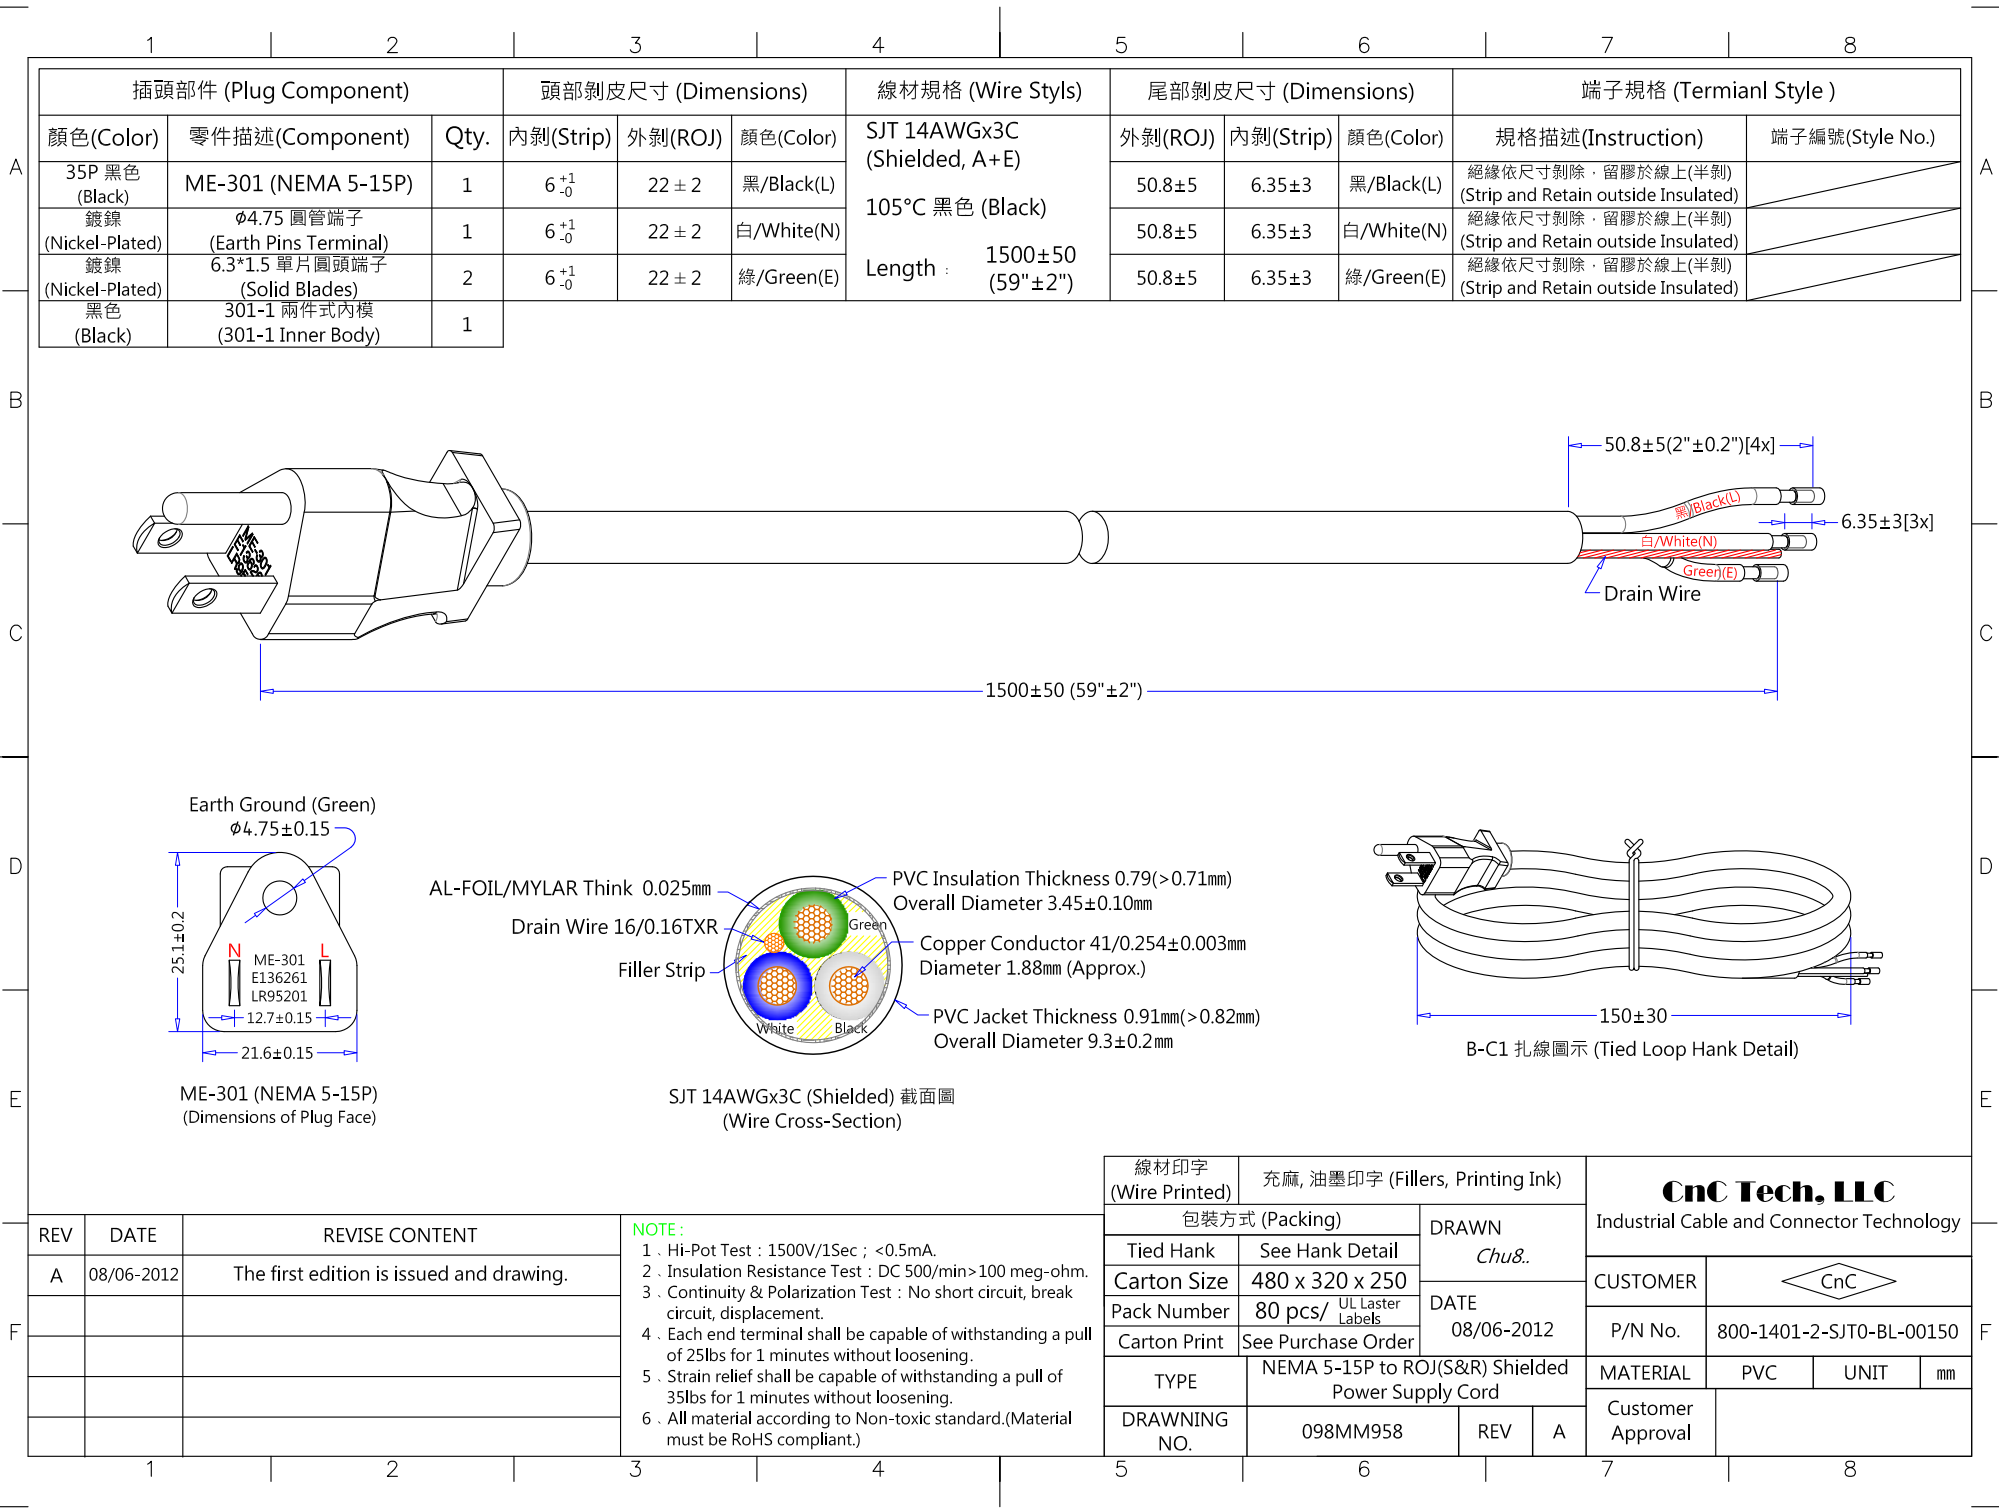
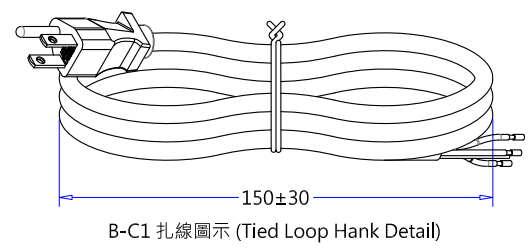
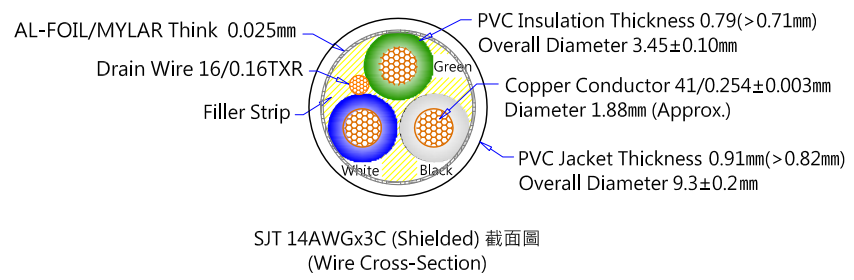




業務校閲：品管校閲：

插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剝皮尺寸 (Dimensions)			端子規格 (Termianl Style)	
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SJT 14AWGx3C (Shielded, A+E) 105°C 黑色 (Black) Length : 1500±50 (59"±2")	外剝(ROJ)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 ⁺¹ ₋₀	22 ± 2	黑/Black(L)		50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	φ4.75 圓管端子 (Earth Pins Terminal)	1	6 ⁺¹ ₋₀	22 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 ⁺¹ ₋₀	22 ± 2	綠/Green(E)		50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1									

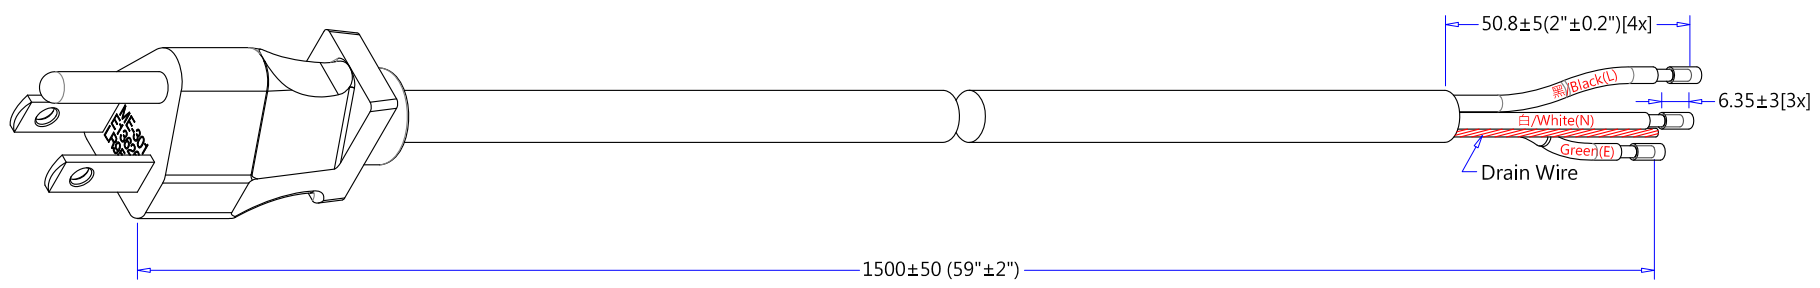

					線材印字 (Wire Printed)	充麻, 油墨印字 (Fillers, Printing Ink)				CnC Tech, LLC Industrial Cable and Connector Technology			
REV	DATE	REVISE CONTENT	NOTE:	1 . Hi-Pot Test : 1500V/1Sec ; <0.5mA. 2 . Insulation Resistance Test : DC 500/min>100 meg-ohm. 3 . Continuity & Polarization Test : No short circuit, break circuit, displacement. 4 . Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening. 5 . Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening. 6 . All material according to Non-toxic standard.(Material must be RoHS compliant.)	包裝方式 (Packing)		DRAWN <i>Chu8.</i>		CUSTOMER	CnC			
					Tied Hank	See Hank Detail	DATE 08/06-2012						
A	08/06-2012	The first edition is issued and drawing.			Carton Size	480 x 320 x 250		UL Laster Labels	P/N No.	800-1401-2-SJT0-BL-00150			
					Pack Number	80 pcs/							
					Carton Print	See Purchase Order			MATERIAL	PVC	UNIT	mm	
					TYPE	NEMA 5-15P to ROJ(S&R) Shielded Power Supply Cord							
					DRAWNING NO.	098MM958		REV	A <td rowspan="2">Customer Approval</td> <td colspan="2" rowspan="2"></td>	Customer Approval			