

REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12

NOTES:

Insulator Material: Nylon-6T, UL 94V-0

Contact Plating: Flash Gold

Contact Material: Brass




Current Rating : 1A AC,DC

Contact Resistance: 20M Ω Max.

Dielectric Withstanding: AC 500V

Insulator Resistance: 1000M Ω Min.

Operating Temp.: -40°C~+105°C

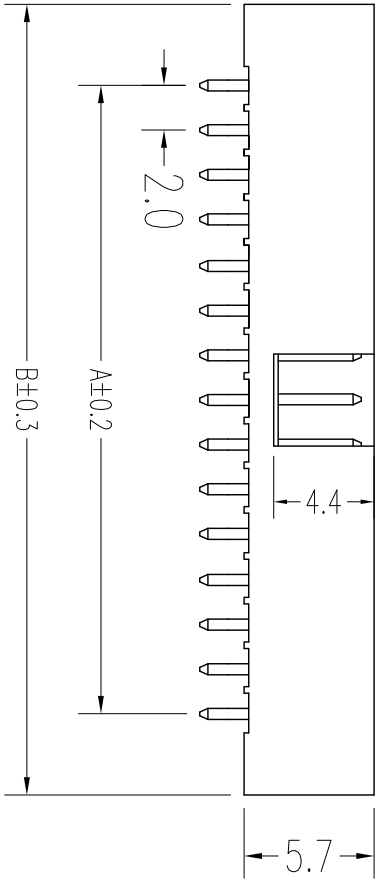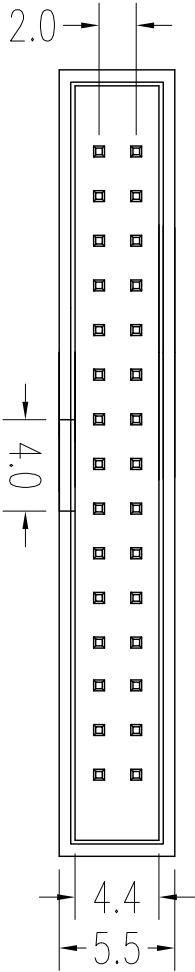

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	4.00	11.20
08	6.00	13.20
10	8.00	15.20
12	10.00	17.20
14	12.00	19.20
16	14.00	21.20
18	16.00	23.30
20	18.00	25.20
24	22.00	29.20
26	24.00	31.20
30	28.00	35.20
34	32.00	39.20
40	38.00	45.20
44	42.00	49.20
50	48.00	55.20
60	58.00	65.20
64	62.00	69.20

UNLESS TOLERANCE		DRAW	BY
GENERAL	ANGLE	DESIGN	BY
X. ± 0.30	X.° ± 3.0°	CHECK	BY
.X ± 0.20	.X° ± 2.0°	APPROVE	BY
.XX ± 0.15	.XX° ± 1.0°		
.XXX ± 0.08	.XXX ± 0.5°		

CnC Tech,LLC

Port NO.


3120-XX-0100-00



SCALE	SHEET	UNIT
1:1	1/1	MM

DRW NO:

REV: A

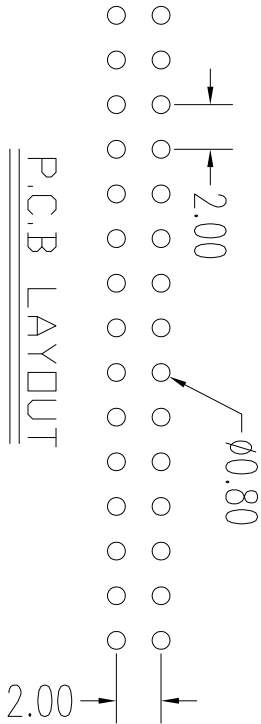

P.C.B LAYOUT