




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	8.0	± .5
	T:	4.0	± .5
	Lead Diameter	0.5	± .1
	S:	5.1	± Nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	5.0	± 1.0
	B:	6.30	± nom
	C:	1.50	± .2

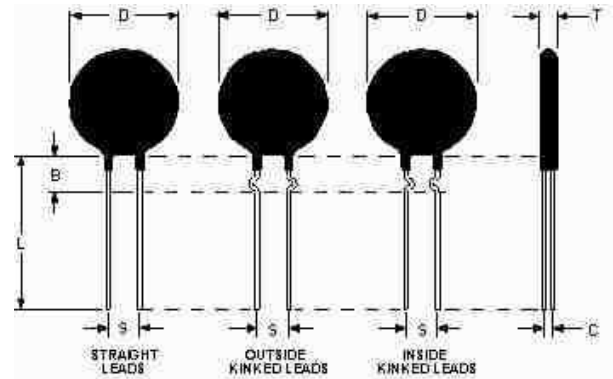

Electrical Specifications

	Resistance:	2.5	Ω	± 25 %
	Max Steady State Current upto 65°C:	3.00		A
	Max Rec. Energy Rating:	10		J
	Actual Failure Instantaneous Energy:	20		J
	Resistance @ 100% Max Current:	0.15		Ω
	Resistance @ 50% Max Current:	0.35		Ω
	Body Temperature at 100% Max Current:	75.00		°C
	Dissipation Constant:	9.0		mW/°C
	Thermal Time Constant:	25		Sec.
	Material Type (for Beta and Curve):	C		

SL08 2R503	
Date: 02/14/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: