




THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	8A 125V AC 4A 250V AC (A, A2, B & C)		Mounting Hole		
	8A 125V AC 4A 250V AC (D)				
Contact Resistance	50m ohm max.		Thickness	X	Y
Insulation Resistance	DC 500V 100M ohm min.		0.75 - 1.25	19.2 - 0.1	13.1 + 0.1
Dielectric Strength	AC 1500V 1 minute		1.25 - 2.00	19.4 - 0.1	13.1 + 0.1
Operating Temperature	-25°C ~ 85°C		2.00 - 3.00	19.8 - 0.1	13.1 + 0.1


Terminal Style

0 2		.187" SQ
0 9		PC
1 0		PC ANGLE

Function

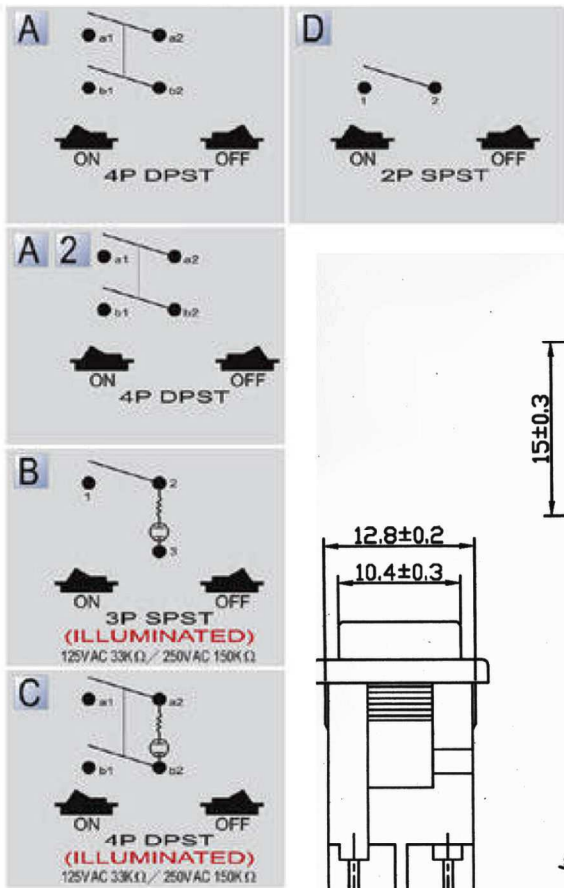

Frames are nylon (UL flame: 94V-2).  
 Illuminated actuators are molded in PC, available in Red, Amber and Green colors.  
 Terminals are silver plated brass.  
 Optional Icons available on buttons.

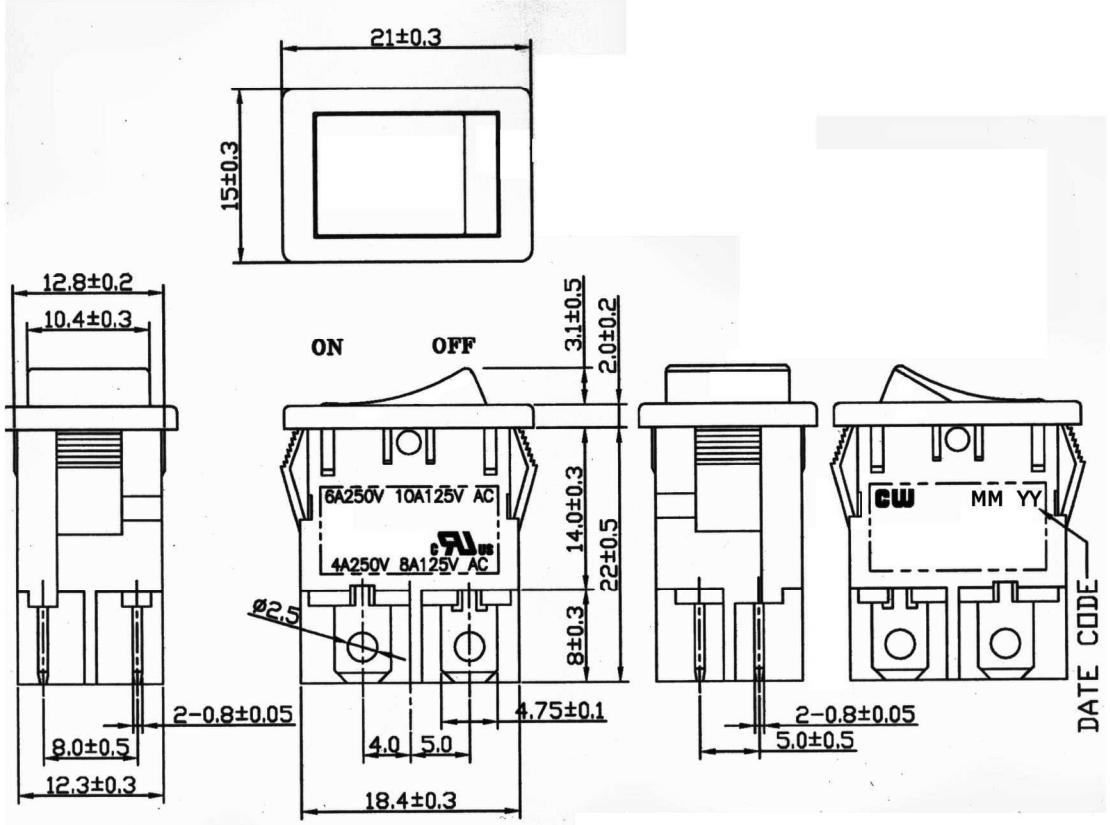

RoHS Compliant

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 2/03/11  
 Title: **ROCKER SWITCH**

Rev. 0

Unit: mm

Checked By: **G.GULD**

CW P/N: **GRB073XSERIES**