



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

|                       |                       |                                                                                 |
|-----------------------|-----------------------|---------------------------------------------------------------------------------|
| Rating                | 10A 125V, 6A 250V AC  |  |
| Contact Resistance    | 50m ohm max.          |                                                                                 |
| Insulation Resistance | DC 500V 100M ohm min. |                                                                                 |
| Dielectric Strength   | AC 1500V 1 minute     |                                                                                 |
| Operating Temperature | -25 °C ~ 85 °C        |                                                                                 |



Cut-Out 6.0 mm thk. max






Phenolic Base.



Actuators are nylon (UL flame: 94V-2).

Terminals are silver plated brass.

Printing: White, Hot Stamp.

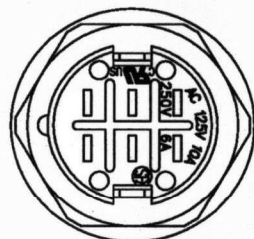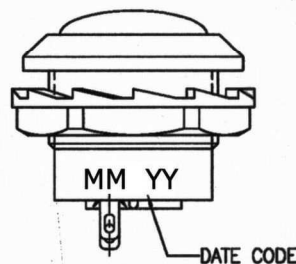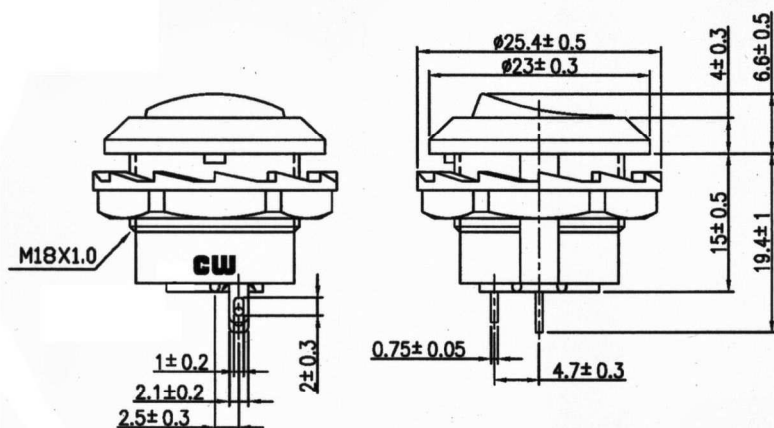

### Function



### Terminal



RoHS Compliant

**CW INDUSTRIES**  
Southampton, Pa. 18966  
Tel 215.355.7080/www.cwind.com

Date Drawn: 2/08/11

Rev. 0

Unit: mm

Checked By: G.GULD

Title:  
**ROCKER SWITCH**

CW P/N:  
**GRB130XSERIES**