

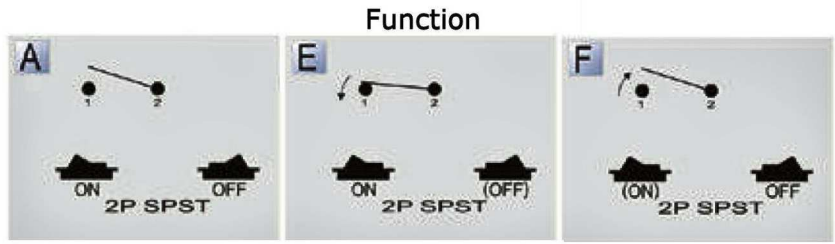
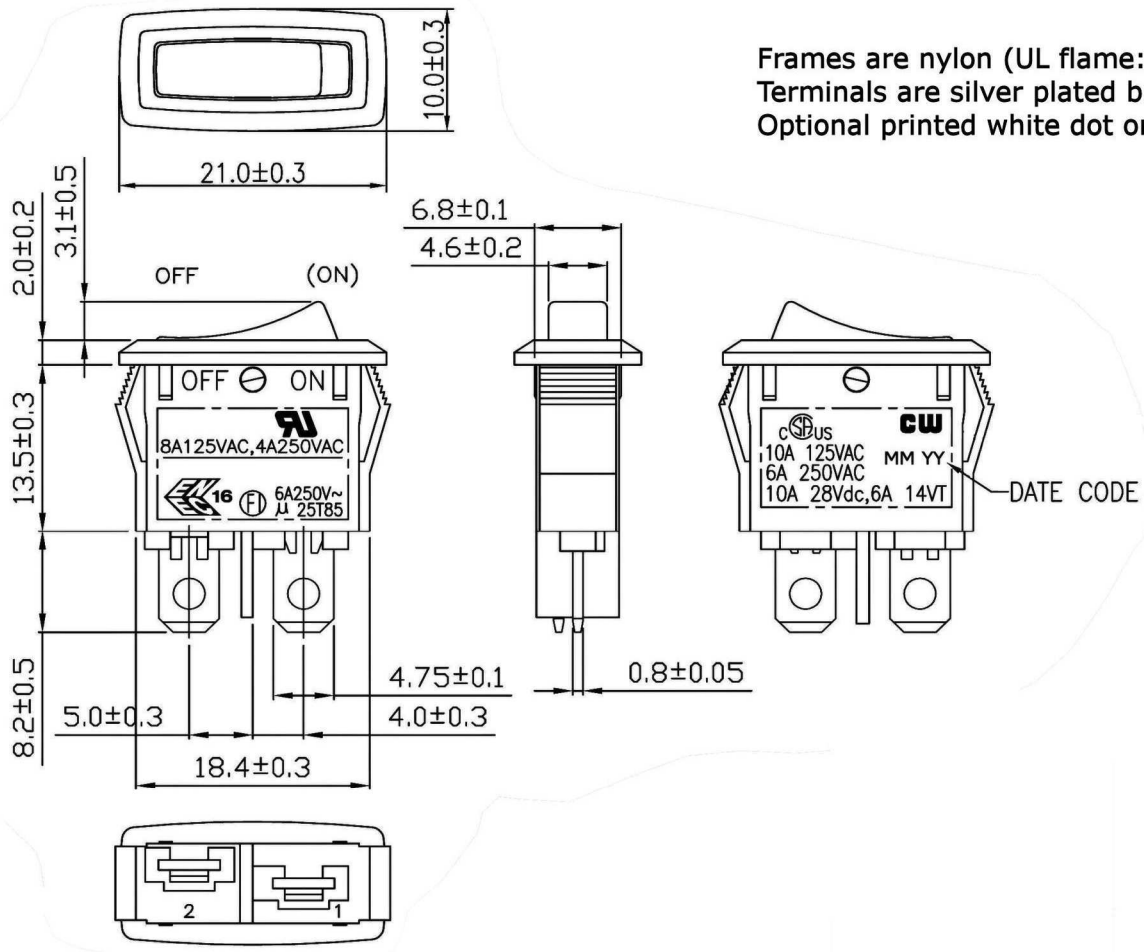


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	8A 125V AC, 4A 250V AC (A & F)	
	8A 125V AC, 4A 250V AC	
	10A 125V AC, 6A 250V AC (E)	
	10A 28V DC, 6A 14 VT 6A 250V ~ N	
Contact Resistance	50m ohm max.	
Insulation Resistance	DC 500V 100M ohm min.	
Dielectric Strength	AC 1500V 1 minute	
Operating Temperature	-25° C ~ 85° C	

Mounting Hole		
		
Thickness	X	Y
0.75 - 1.25	19.2 - 0.1	7.0 + 0.1
1.25 - 2.00	19.4 - 0.1	7.0 + 0.1
2.00 - 3.00	19.8 - 0.1	7.0 + 0.1


Frames are nylon (UL flame: 94V-2).
 Terminals are silver plated brass.
 Optional printed white dot on button available.



() = Momentary Function

Terminal
 0 2  .187" SQ

RoHS Compliant

 CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 2/08/11	Rev. 0	Unit: mm	Checked By: G.GULD
	Title: ROCKER SWITCH		CW P/N: GRB243XSERIES	