





THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 125VAC 1/3 HP 10A 250VAC 1/2 HP 16A 12VDC 6A 28VDC	Mounting Hole	Circuit Diagram
	20A 12VDC		
Contact Resistance	50m ohm Max.		SEE CHART
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	SEE CHART		
		Thickness	
		0.75....1.5	19.4-0.1 13+0.1
		1.5....2.5	19.8-0.1 13+0.1

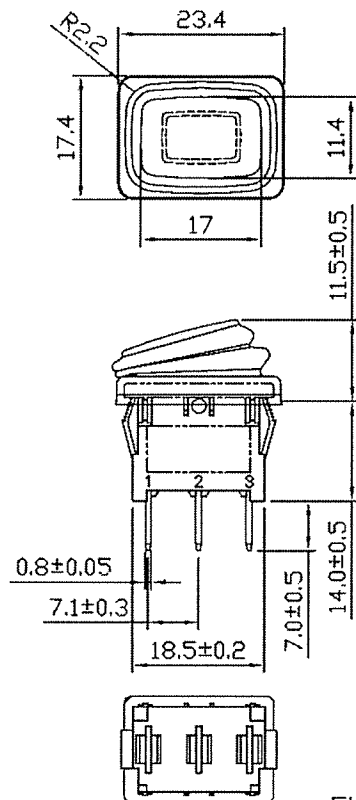

Frames are nylon (UL flame: 94V-2).
Actuators are nylon (UL flame: 94V-2).
Illuminated actuators are molded in PC, in Red, Amber or Green colors.
Waterproof Rubber: Black, Silicone.
Terminals are Silver plated Brass.
Waterproof to fit IP65.

FUNCTION

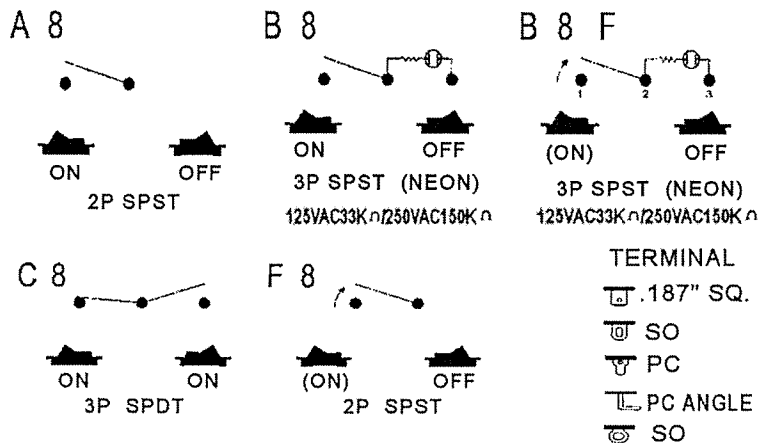

LAMP CHART

LAMP	VOLTAGE	
▶ For details of LED regular voltage, please contact sales dept..		
NEON	125VAC (110V)	250VAC (277VAC)
LED	12VDC (14V)	24VDC LED regular rating
LED	125VAC (110V)	250VAC (220V)

RoHS Compliant ()=Momentary Function

2 Updated ratings. 3-1-13.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/26/11

Rev. 2

Unit: mm

Checked By: *G. Guld*

Title: **ROCKER SWITCH**

CW P/N: **GRB066X8SERIES**