| | |
|---|---|
| **Rating** | 20A 125V AC, 16A 250V AC ( A & C )<br>20A 125V AC ( B ) |
| **Contact Resistance** | 50m ohm max. |
| **Insulation Resistance** | DC 500V 100M ohm min. |
| **Dielectric Strength** | AC 1500V 1 minute |
| **Operating Temperature** | -25° C ~ 85°C |

**Mounting Hole**




Cut-Out 1.0 ~ 3.0 mm thk.

**Circuit Diagram**

See Chart

Frames are nylon (UL flame: 94V-2).
Illuminated actuators are molded in PC, available in Red, Amber or Green Colors.
Terminals are silver plated brass.

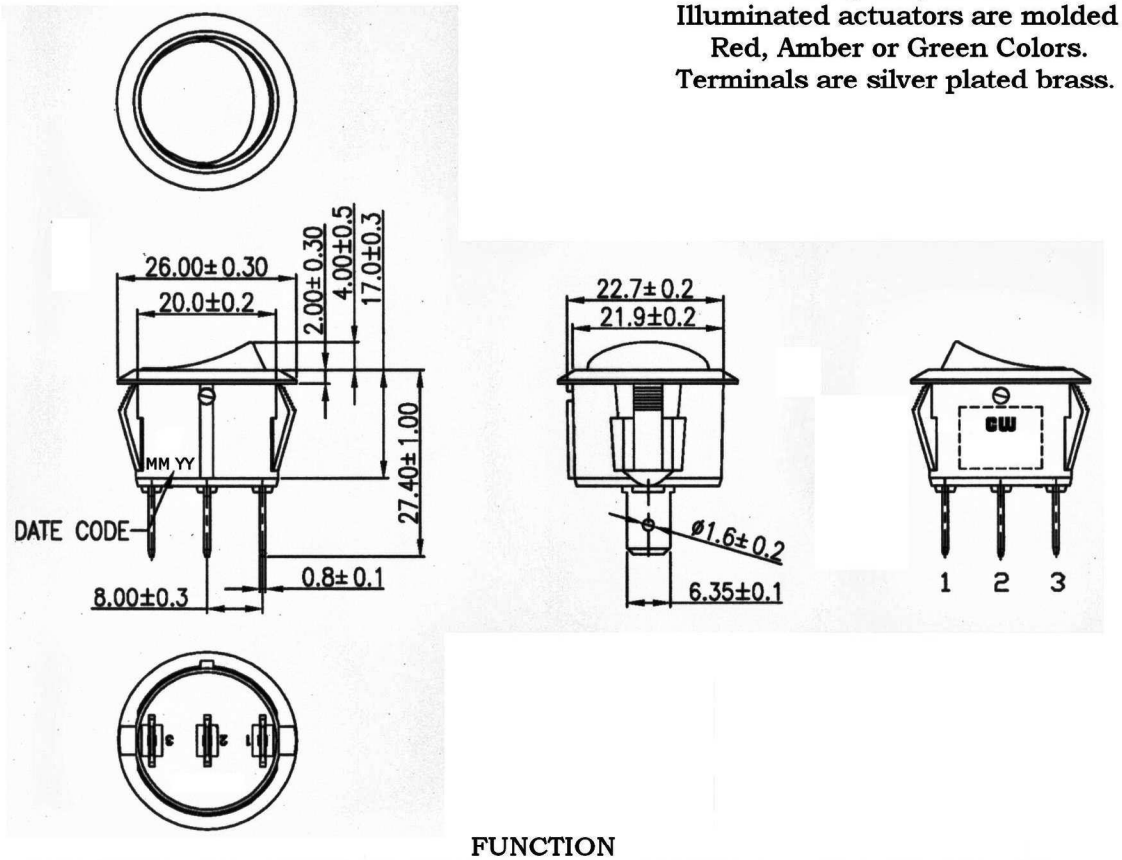


FUNCTION

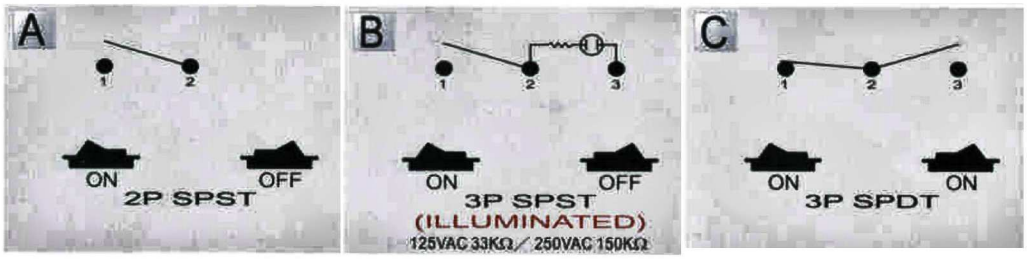


TERMINAL

**RoHS Compliant**

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

**CW INDUSTRIES**
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

| | | | |
|---|---|---|---|
| **Date Drawn:** 1/19/2011 | **Rev.** 0 | **Unit:** mm | **Checked By:** G.GULD |
| **Title:** ROCKER SWITCH | | **CW P/N:** GRB293XSERIES | |