


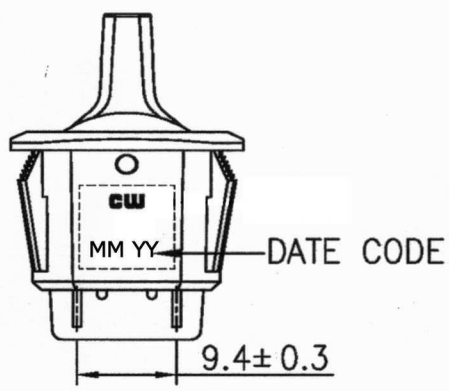
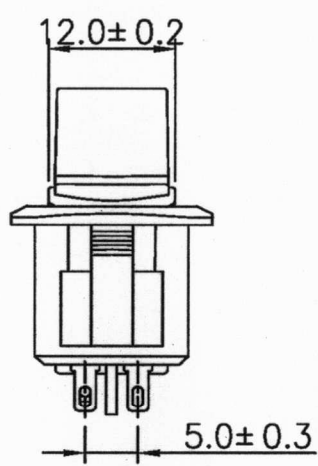
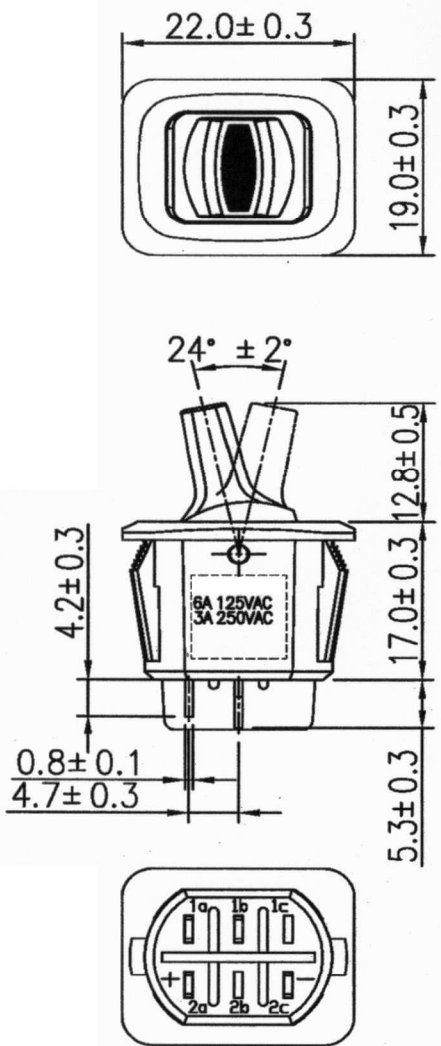


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	6A 125V AC, 3A 250V AC		Mounting Hole 	Circuit Diagram 
Contact Resistance	50m ohm max.			
Insulation Resistance	DC 500V 100M ohm min.			
Dielectric Strength	AC 1000V 1 minute			
Operating Temperature	-25° C ~ 85° C			

BASE COLOR: Black
BUTTON COLOR: Red
LED: Red

Cut-Out 0.75 ~ 3.0 mm thk.
LED Rating
Red: @ 20mA if= 2.0 VDC



RoHS Compliant

1 Added  to ratings. 2/03/11

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 2/03/11
Rev. 1
Title: **ROCKER SWITCH**

Unit: mm
Checked By: **G.GULD**
CW P/N: **GRB290AL205BRR**