

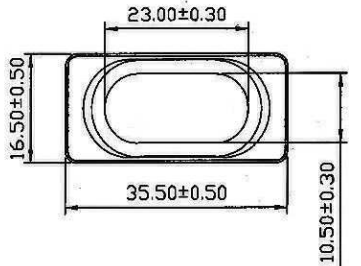



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	16A 125VAC 1/8HP 125VAC 10A 250VAC 1/3HP 250VAC	Mounting Hole		Circuit Diagram SEE CHART	
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-25°C~85°C	Thickness	X		Y
Switch Function	SEE CHART	0.75...1.25	30.2-0.1		11.2+0.1
		1.25...2	30.4-0.1	11.2+0.1	
		2...3	30.8-0.1	11.2+0.1	

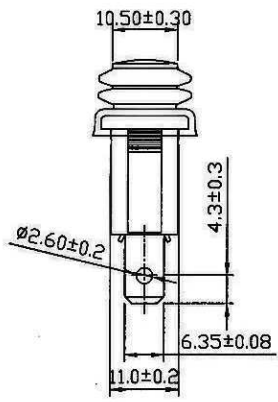

Frames: Black, Nylon 66 (94V-2)
 Actuator: Black, Nylon 66 (94V-2)
 Illuminated Actuators: PC, In Red, Amber or Green Colors
 Terminals: # 1 & # 2 Copper alloy, Silver plated
 Terminal: # 3 Brass alloy
 Waterproof Rubber: Black, Silicone
 Waterproof: IP65

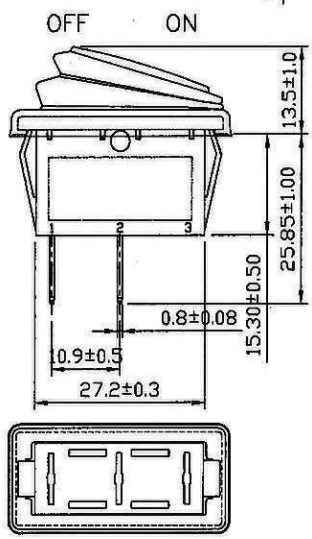

FUNCTION

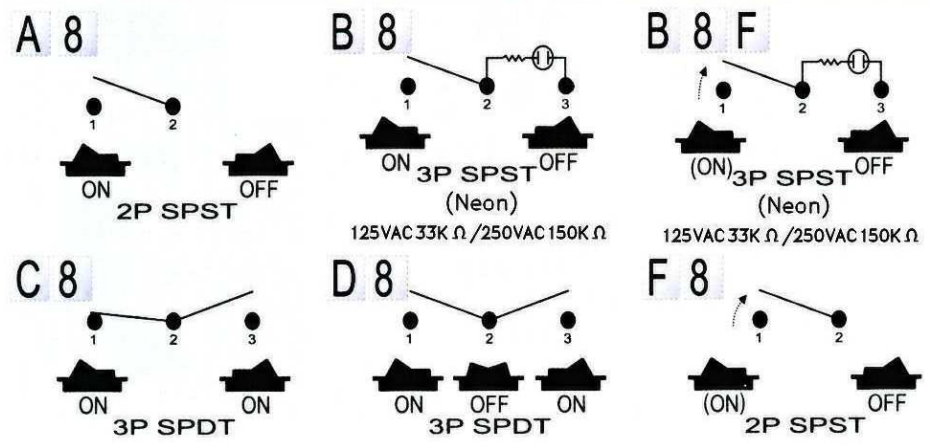

Terminal Options

0 1		.250" SQ
0 5		SO

RoHS Compliant

() = Momentary Function

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 1/21/2011 Rev. 0

Unit: mm

Checked By: G.Guld

Title: **ROCKER SWITCH**

CW P/N: **GRB070X8SERIES**