



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	20A 125VAC 1/3 HP 125VAC 16A 250VAC 1/2 HP 250VAC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temp.	- 25 ° C ~ 85 ° C
Switch Function	SEE CHART

Mounting Hole		Circuit Diagram
		SEE CHART
Thickness	X	
0.75...2.5	27.6-0.1	
2.5...3.5	27.8-0.1	
3.5...4.5	28.0-0.1	

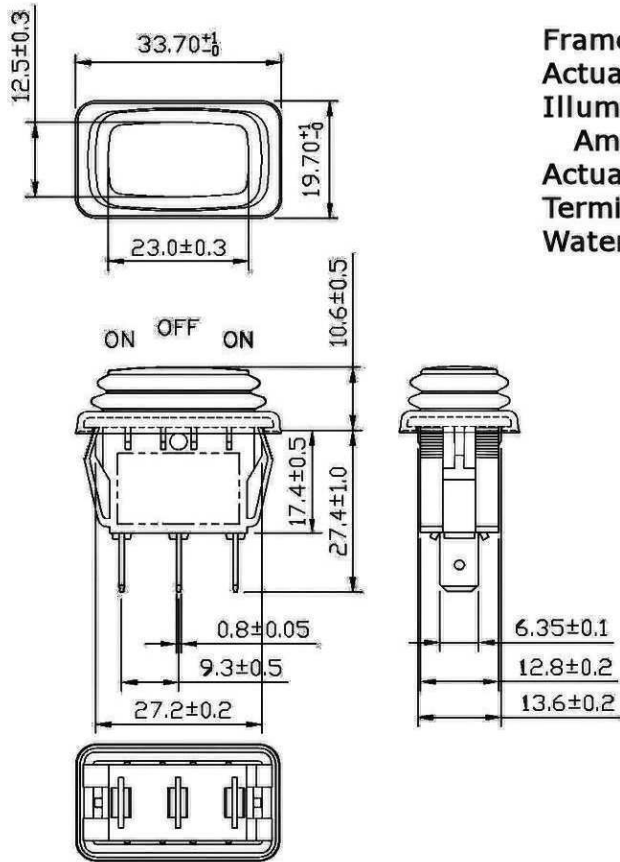

Frames are Nylon (UL flame: 94V-2).
 Actuator is Black, PC.
 Illuminated actuators are molded in PC, available in Red, Amber or Green Colors.
 Actuator Boot is waterproof rubber Black, Silicone.
 Terminals are Silver plated brass.
 Waterproof and dustproof to fit IP-65.

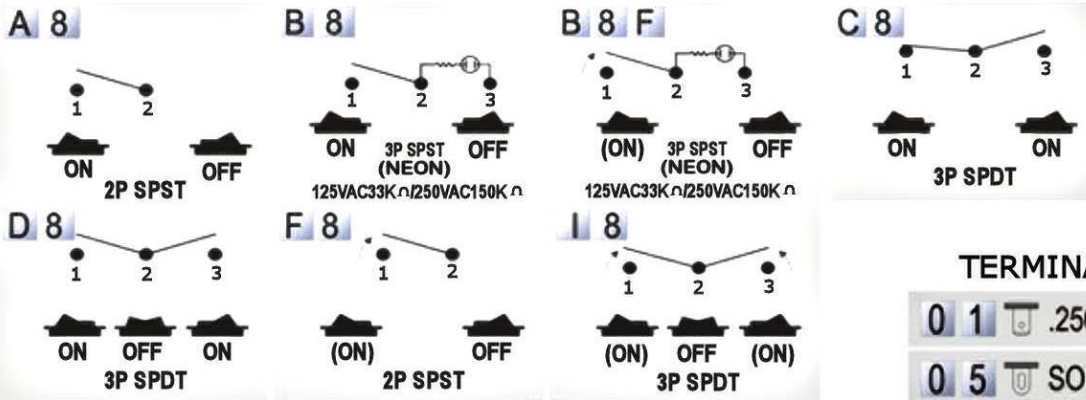

TERMINALS

0 1	.250" SQ
0 5	SO N/A D8/I8

RoHS Compliant

() = Momentary Function

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 1/21/2011

Rev. 0

Unit: mm

Checked By: G.Guld

Title: **ROCKER SWITCH**

CW P/N: **GRB238X8SERIES**