





Rating	21A 14VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temp.	- 20° C ~ 85° C
Function	3P SPST ON - OFF Lamp Dependent
Lamp Type	LED 12VDC 14V w/resistor

Mounting Hole			Circuit Diagram
			 12V R=680 ohm
Thickness	X	Y	
0.75~5mm 0.03~0.2inch	36.8 ^{+0.2} ₋₀ 1.45 ^{+0.008} ₋₀	15.3 ^{+0.2} ₋₀ .60 ^{+0.008} ₋₀	

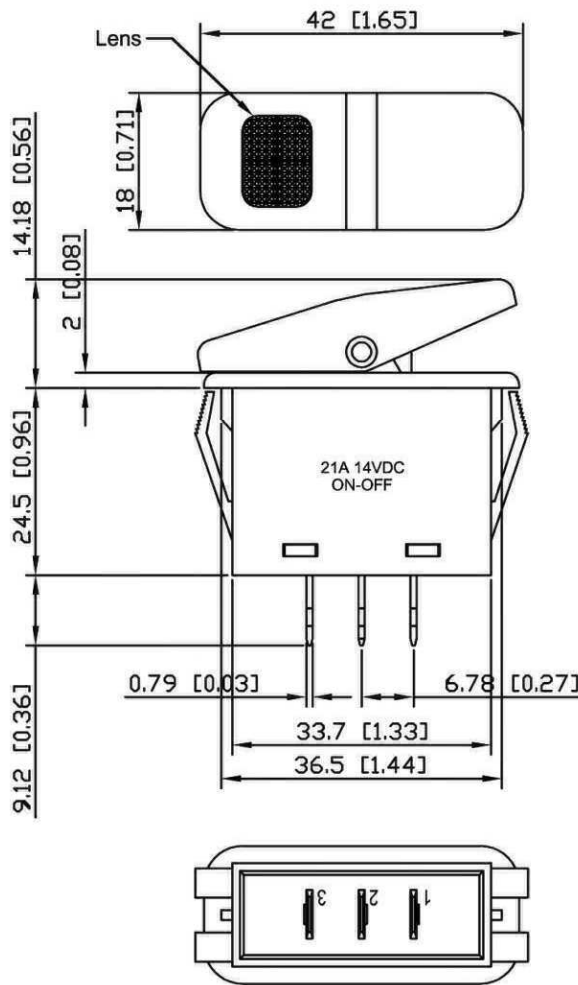

Material:
 Frame: Black, Nylon# 66
 Actuator: Black, Nylon#66+33%GF
 Lens: Red, PC
 Printed: None
 Water proof and dust proof to fit IP-56

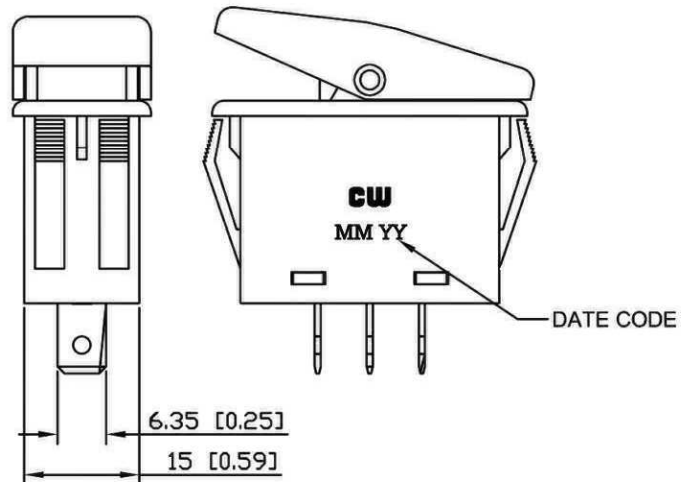

RoHS Compliant

2	Added Dependent to function & Lamp Type. 12/08/11.
1	Rotated button and updated views & Circuit diagram. 1/13/11.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 12/08/10

Rev. 2

Unit: mm

Checked By: *G. Gold*

Title: **ROCKER SWITCH**

CW P/N: **GRB258B01BR1**