
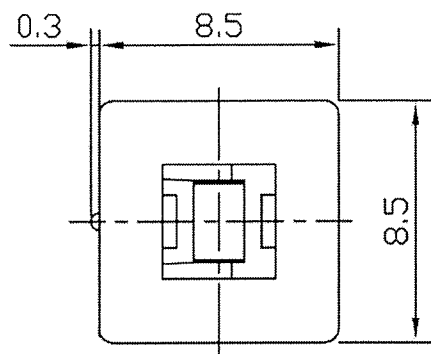
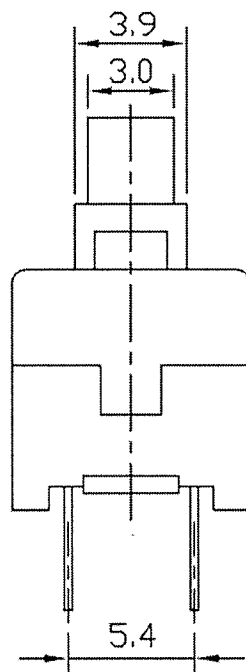
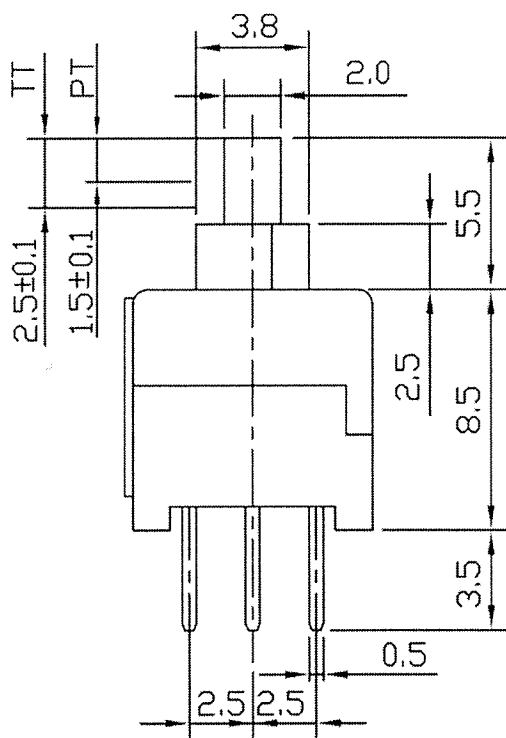


SCHEMATIC

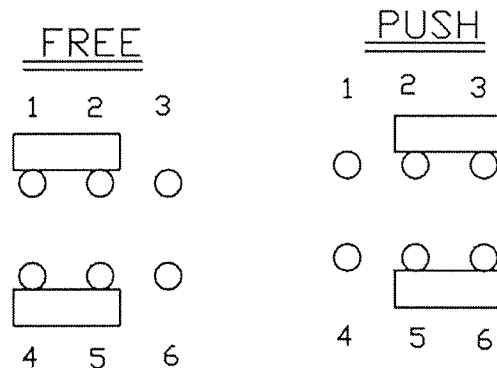

Rating	30VDC 0.3A / 16VDC 0.5A
Withstand Voltage	AC250V 1 minute
Insulation Resistance	$\geq 100M\Omega$ DC250V
Contact Resistance	$\leq 50m\Omega$
Soldering Temp.	$245\pm 5^{\circ}C$ 5 Sec.
Mechanical Life	100,000 cycles
Electrical Life	10,000 cycles
Operating Temp.	$-25^{\circ}C - + 65^{\circ}C$
Position Travel	1.5 ± 0.2 mm
Ambient Humidity Range	$< 85\%RH$
Operating Force	$200\pm 80gf$

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0.2(mm)$.

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 3-21-12

Rev. 1

Unit: mm

Checked By: *G. Guld*

1 Added Button to title. Updated Operating Temp. & removed shipping temper. 11-12-12.

Title:

PUSH BUTTON SWITCH

CW P/N:

GPBS850N