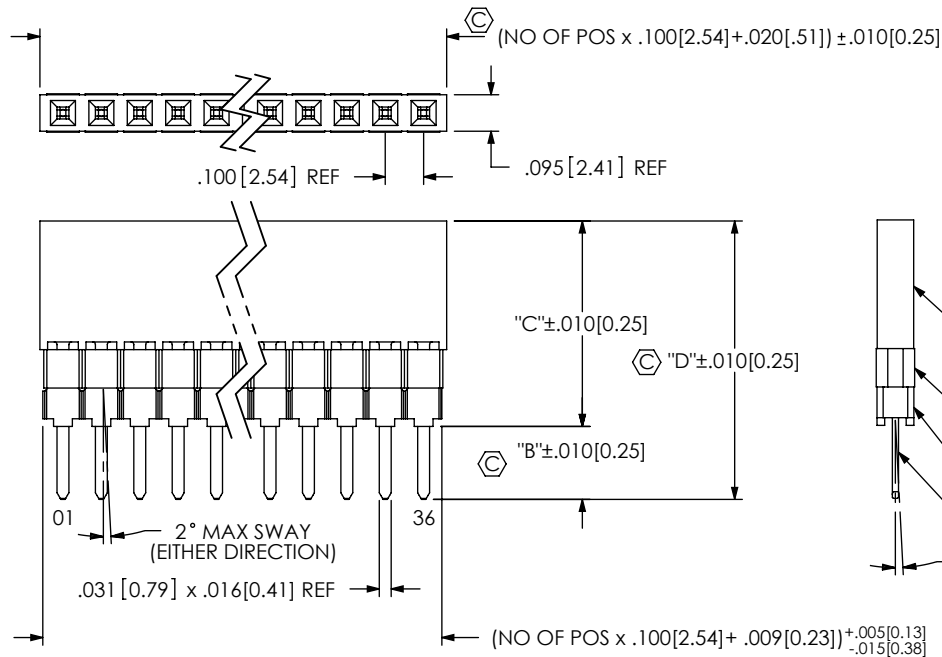


1.  $\text{⌀}$  REPRESENTS A CRITICAL DIMENSION.
2. MINIMUM CONTACT PUSHOUT FORCE: 1 LB.
3. MAXIMUM ALLOWABLE BOW .003[0.08] IN/IN AFTER ASSEMBLY.
4. FOR A 1 POSITION SINGLE ROW ALL SPACERS ARE TO BE LBS-S.
5. SPACERS SHALL BE ASSEMBLED AS SHOWN WITH SNAP GROOVES AWAY FROM SSW BODY.
6. SINGLE ROW, 33 POS PART TO USE 31 POS AND 2 POS SPACERS.

DO NOT  
SCALE FROM  
THIS PRINTFIG 1  
ESW-1XX-XX-X-S SHOWN

ESW-1XX-XX-X-X-XX-XX

CONTACT STYLE  
SOLDER TAIL  
STANDARD INSERTION USE C-8-X-X  
LOW INSERTION USE C-17-X-X  
(SEE TABLE 1)

BODY LENGTH SPEC  
POSITIONS 01 THRU 36 (SEE FIG 1)  
(SEE NOTE 4 FOR ONE POSITION  
SINGLE ROW)  
(FOR 33 POS, SEE NOTE 6)

LEAD STYLE SPECIFICATION  
(SEE TABLE 1)

LOCKING LEAD OPTION  
-LL (SEE FIG 4, SHT 2)  
(N/A ON 1 OR 2  
POSITION SINGLE ROW)

POLARIZING OPTION  
INDICATES POS  
(SEE FIG 3, SHT 2)

ROW SPECIFICATION  
-S: SINGLE (USE SSW-50-S)  
-D: DOUBLE (USE SSW-50-D)

PLATING SPECIFICATION

- G: 20μ" SELECTIVE GOLD IN CONTACT AREA, 3μ" SELECTIVE GOLD ON TAIL.
- T: MATTE TIN ON ENTIRE PIN.  
(STANDARD INSERTION FORCE ONLY)
- S: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- H: 30μ" SELECTIVE GOLD IN CONTACT AREA, 3μ" SELECTIVE GOLD ON TAIL.
- F: 3μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- E: 50μ" SELECTIVE GOLD IN CONTACT AREA, 3μ" SELECTIVE GOLD ON TAIL.
- L: 10μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

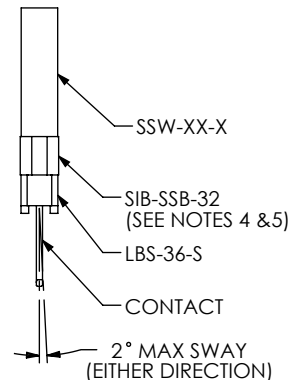
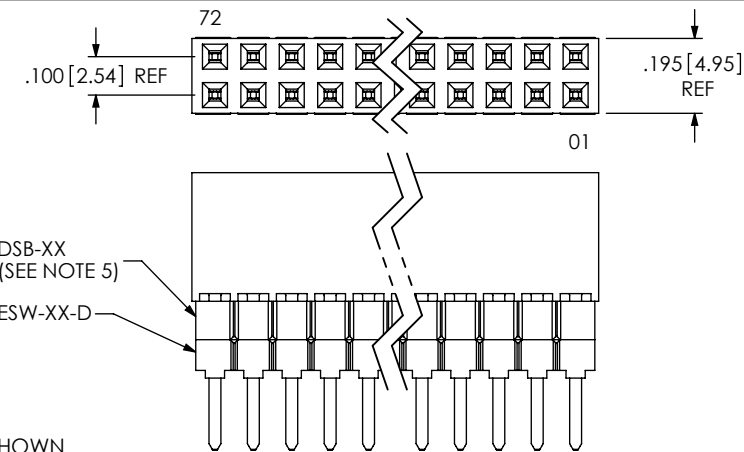
FIG 2  
ESW-1XX-XX-X-D SHOWN

TABLE 1						
STANDARD INSERTION FORCE	CONTACT	SPACER SPECIFICATION (SEE NOTE 4)		"B"	"C"	"D"
		ESW-S	ESW-D			
-12	C-8-2-X			.090 [2.29]	.435 [11.05]	.525 [13.34]
-13	C-8-3-X			.290 [7.37]	.435 [11.05]	.725 [18.42]
-14	C-8-5-X			.480 [12.19]	.435 [11.05]	.915 [23.24]
-23	C-8-3-X	(1) SUB-SSB-32	(1) DSB-XX	.190 [4.83]	.535 [13.59]	.725 [18.42]
-24	C-8-5-X	(1) SUB-SSB-32	(1) DSB-XX	.380 [9.65]	.535 [13.59]	.915 [23.24]
-33	C-8-3-X	(2) SUB-SSB-32	(2) DSB-XX	.090 [2.29]	.635 [16.13]	.725 [18.42]
-34	C-8-5-X	(2) SUB-SSB-32	(2) DSB-XX	.280 [7.11]	.635 [16.13]	.915 [23.24]
-44	C-8-5-X	(1) ESS-XX-S	(3) DSB-XX	.180 [4.57]	.735 [18.67]	.915 [23.24]
LOW INSERTION FORCE						
	-37	C-17-2-X		.090 [2.29]	.435 [11.05]	.525 [13.34]
	-38	C-17-3-X		.290 [7.37]	.435 [11.05]	.725 [18.42]
	-39	C-17-5-X		.480 [12.19]	.435 [11.05]	.915 [23.24]
	-48	C-17-3-X	(1) SUB-SSB-32	.190 [4.83]	.535 [13.59]	.725 [18.42]
	-49	C-17-5-X	(1) SUB-SSB-32	.380 [9.65]	.535 [13.59]	.915 [23.24]
	-58	C-17-3-X	(2) SUB-SSB-32	.090 [2.29]	.635 [16.13]	.725 [18.42]
	-59	C-17-5-X	(2) SUB-SSB-32	.280 [7.11]	.635 [16.13]	.915 [23.24]
	-69	C-17-5-X	(1) ESS-XX-S	.180 [4.57]	.735 [18.67]	.915 [23.24]

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS

ANGLES

.XX: ±.01 [.3]

2°

.XXX: ±.005 [.13]

.XXXX: ±.0020 [.051]

## PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION  
CONFIDENTIAL AND PROPRIETARY TO  
SAMTEC, INC. AND SHALL NOT BE REPRODUCED  
OR TRANSFERRED TO OTHER DOCUMENTS OR  
DISCLOSED TO OTHERS OR USED FOR ANY  
PURPOSE OTHER THAN THAT WHICH IT WAS  
OBTAINED WITHOUT THE EXPRESSED WRITTEN  
CONSENT OF SAMTEC, INC.

## MATERIAL:

DO NOT SCALE DRAWING

SSW: LCP, UL 94 V0, COLOR: BLACK  
SSB, ESS, DSS: PBT, UL 94 V0, COLOR: BLACK  
LBS: HTN, UL 94 V0, COLOR: BLACK  
CONTACT: PHOS BRONZE

SHEET SCALE: 2:1

## DESCRIPTION:

**samtec**

520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail: info@SAMTEC.com code 55322

ESW STRIP ASM.

DWG. NO.

ESW-1XX-XX-X-X-XX-XX

BY: JORDAN

07/16/1985

SHEET 1 OF 2

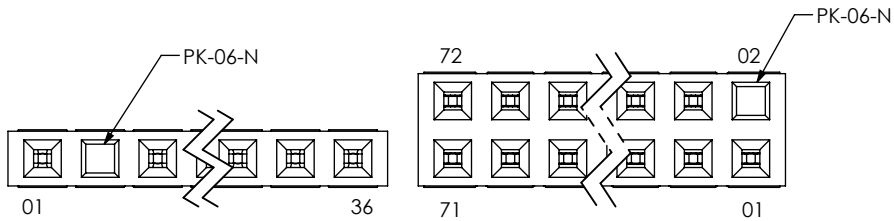


FIG 3  
POLARIZATION LOCATION  
INSERT PK-06-N INTO SPECIFIED POS AND BREAK OFF TAB  
(ESW-1XX-XX-X-X-02 SHOWN)  
(SAME AS FIG 1, DIFFERENT AS SHOWN)

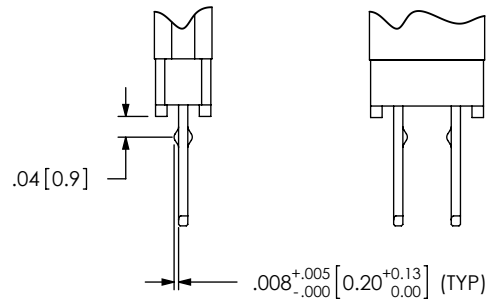


FIG 4  
LOCKING LEAD OPTION  
LOCATED ON OR ABOUT THE CENTERLINE  
(N/A IN 1 OR 2 POSITION SINGLE ROW)

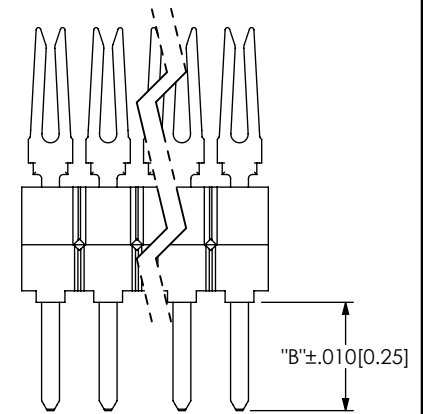


FIG 5  
IN PROCESS 'A'  
(LEAD STYLES -13, -14, -23, -24, -33, -34, -44, -38, -39, -48, -49, -58, -59, -69)


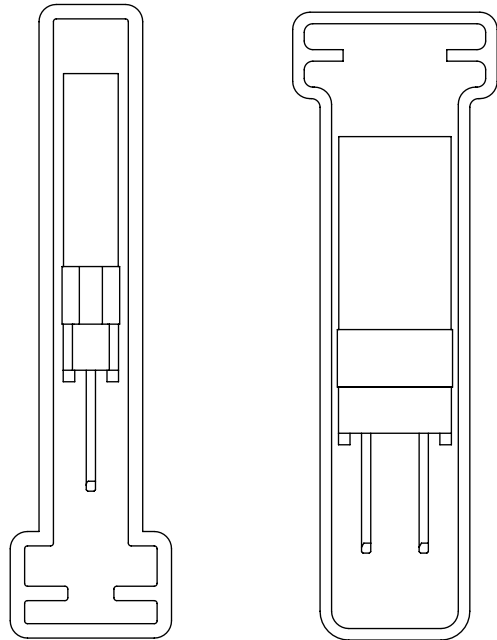


FIG 7  
TUBE VIEWS

NOTE:  
FOR -12 & -37 LEAD STYLES, TUBE PACKAGE -05 THRU -36 POSITIONS ONLY  
FOR -13, -23, -33, -38, -48 & -58 LEAD STYLES, TUBE PACKAGE -08 THRU -36 POSITIONS ONLY.  
FOR -14, -24, -34, -39, -44, -49, -59, & -69 LEAD STYLES TUBE PACKAGE -05 THRU -36 POSITIONS ONLY.

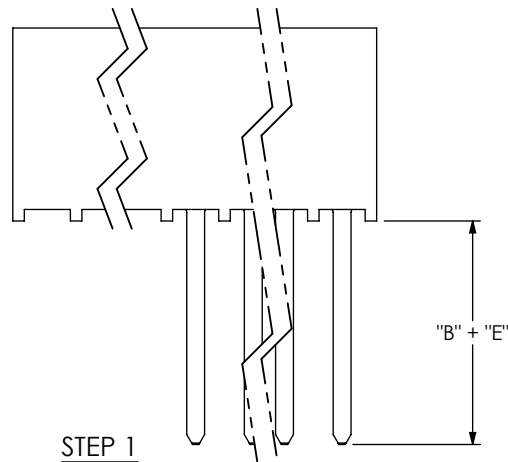

STEP 1  
STEPS:  
1. MACHINE FILL SSW-50-D TO 36 POS.  
2. MOUNT ESW-36-D.  
3. ROTO CUT TO POS. (SEE FIG 1)

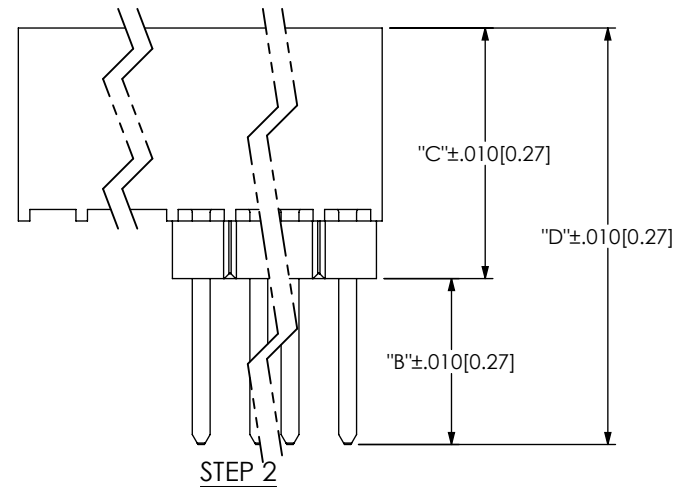


FIG 6  
IN PROCESS 'B'  
(LEAD STYLES -12 & -37)

TABLE 2			
LEAD STYLE	ROW	TUBE	PLUG
-12, -37	-S	PT-1-24-01-46	TP-24
-13, -14, -23, -24, -33, -34, -44, -38, -39, -48, -49, -58, -59, -69		PT-1-24-01-47	TP-09
-12, -37		PT-1-24-03-44	TP-03
-13, -14, -23, -24, -33, -34, -44, -38, -39, -48, -49, -58, -59, -69	-D	PT-1-24-02-47	TP-03

PROPRIETARY NOTE  
THIS DOCUMENT CONTAINS INFORMATION  
CONFIDENTIAL AND PROPRIETARY TO  
SAMTEC, INC. AND SHALL NOT BE REPRODUCED  
OR TRANSFERRED TO OTHER DOCUMENTS OR  
DISCLOSED TO OTHERS OR USED FOR ANY  
PURPOSE OTHER THAN THAT WHICH IT WAS  
OBTAINED WITHOUT THE EXPRESSED WRITTEN  
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:  
ESW STRIP ASM.  
DWG. NO.  
ESW-1XX-XX-X-X-XX-XX  
BY: JORDAN 07/16/1985 SHEET 2 OF 2