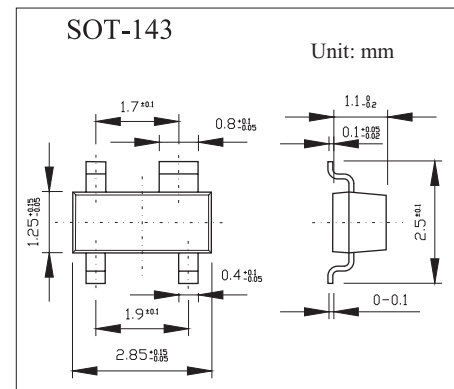


Silicon Schottky Diode

BAT62

■ Features

- Low barrier diode for detectors up to GHz frequencies.

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse voltage	V_R	40	V
Forward current	I_F	20	mA
Total power dissipation, $T_s \leq 85^\circ\text{C}$	P_{tot}	100	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature range	T_{stg}	-55 to + 150	$^\circ\text{C}$
Junction - ambient ¹⁾	$R_{th JA}$	≤ 810	K/W
Junction - soldering point	$R_{th JS}$	≤ 650	K/W

Note

1.Package mounted on alumina $15\text{ mm} \times 16.7\text{ mm} \times 0.7\text{ mm}$.

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse current	I_R	$V_R = 40\text{ V}$			10	$\mu\text{ A}$
Forward voltage	V_F	$I_F = 2\text{ mA}$		0.58	1	V
Diode capacitance	C_T	$f = 1\text{ MHz}; V_R = 0$		0.35	0.6	pF
Case capacitance	C_c			0.1		pF
Differential resistance	R_o	$V_R = 0, f = 10\text{ KHz}$		225		K Ω
Series inductance	L_s			2		nH

■ Marking

Marking	62
---------	----