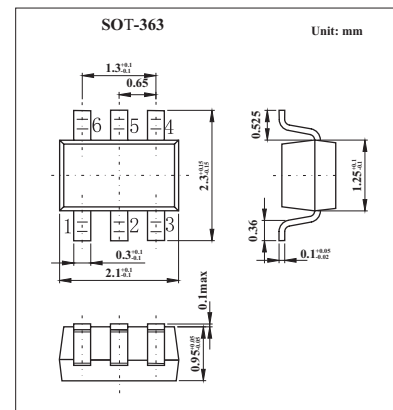


Schottky Barrier Triple Diode

BAT754L

■ Features

- Very low forward voltage
- Guard ring protected
- Low diode capacitance
- Three independent diodes in a small plastic SMD package.

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Max	Unit
Per diode					
continuous reverse voltage	V_R			30	V
continuous forward current	I_F			200	mA
repetitive peak forward current	I_{FRM}	$t_p \leq 1 \text{ s}; \delta \leq 0.5$		300	mA
non-repetitive peak forward current	I_{FSM}	$t_p < 10 \text{ ms}$		600	mA
storage temperature	T_{stg}		-65	+150	$^\circ\text{C}$
junction temperature	T_j			125	$^\circ\text{C}$
operating ambient temperature	T_{amb}		-65	+125	$^\circ\text{C}$
thermal resistance from junction to ambient	$R_{th j-a}$			416	K/W

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Max	Unit
forward voltage	V_F	$I_F = 0.1 \text{ mA}$	200	mV
		$I_F = 1 \text{ mA}$	260	
		$I_F = 10 \text{ mA}$	340	
		$I_F = 30 \text{ mA}$	420	
		$I_F = 100 \text{ mA}$	750	
reverse current	I_R	$V_R = 25 \text{ V}; \text{note 1}$	2	μA
diode capacitance	C_d	$f = 1 \text{ MHz}; V_R = 1 \text{ V}$	10	pF

Note

1. Pulse test: $t_p = 300 \mu\text{s}; \delta = 0.02$.

■ Marking

Marking	L1
---------	----