


## Small Signal Schottky Diodes KAR46, KAR46A (BAR46, BAR46A)

### ■ Features

- Very small conduction losses
- Negligible switching losses
- Low forward voltage Drop
- Surface mount device

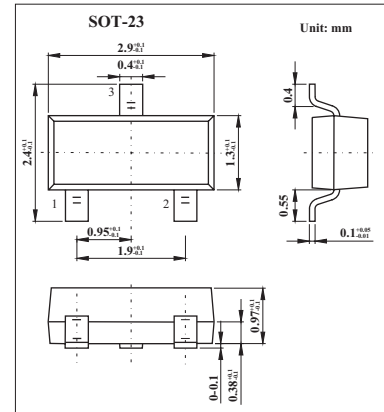

### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Maximum Repetitive Reverse Voltage	$V_{RRM}$	100	V
Average Rectified Forward Current	$I_F$	150	mA
Power Dissipation	$P_D$	230	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	500	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-65 to +150	$^\circ\text{C}$

### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Breakdown Voltage	$V_R$	$I_R = 100 \mu\text{A}, T_J = 25^\circ\text{C}$	100			V
Forward Voltage	$V_F$	$I_F = 0.1\text{mA}, T_J = 25^\circ\text{C}$			0.25	V
		$I_F = 10\text{mA}, T_J = 25^\circ\text{C}$			0.45	
		$I_F = 250\text{mA}, T_J = 25^\circ\text{C}$			1	
Reverse Current	$I_R$	$T_J = 25^\circ\text{C}, V_R = 1.5\text{V}$			0.5	$\mu\text{A}$
		$T_J = 60^\circ\text{C}, V_R = 1.5\text{V}$			5	
		$T_J = 25^\circ\text{C}, V_R = 10\text{V}$			0.8	
		$T_J = 60^\circ\text{C}, V_R = 10\text{V}$			7.5	
		$T_J = 25^\circ\text{C}, V_R = 50\text{V}$			2	
		$T_J = 60^\circ\text{C}, V_R = 50\text{V}$			15	
		$T_J = 25^\circ\text{C}, V_R = 75\text{V}$			5	
$T_J = 60^\circ\text{C}, V_R = 75\text{V}$			20			
Junction Capacitance	$C_j$	$T_J = 25^\circ\text{C}, V_R = 0\text{V}, f = 1.0\text{MHz}$		10		pF
		$T_J = 25^\circ\text{C}, V_R = 1\text{V}, f = 1.0\text{MHz}$		6		

### ■ Marking

NO.	KAR46	KAR46A
Marking	S46	A46