


High Speed Switching Diodes

1SS400

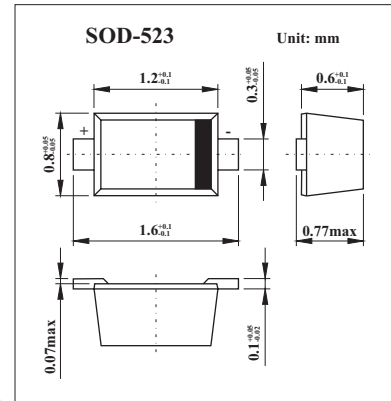

■ Features

- Small surface mounting type
- High Speed
- High reliability with high surge current handling capability

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Peak reverse voltage	V_{RM}	90	V
DC reverse voltage	V_R	80	V
Mean rectifying current	I_o	100	mA
Peak forward current	I_{FM}	225	mA
Surge current (1s)	I_{surge}	500	mA
Junction temperature	T_j	125	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F=100\text{mA}$			1.2	V
Reverse current	I_R	$V_R=80\text{V}$			0.1	μA
Capacitance between terminals	C_T	$V_R=0.5\text{V}, f=1\text{MHz}$			3	pF
Reverse recovery time	t_{rr}	$V_R=6\text{V}, I_F=10\text{mA}, R_L=100\ \Omega$			4	ns

■ Marking

Marking	A
---------	---