


Silicon Epitaxial Planar Diode

1SV293

■ Features

- Ultra Low Series Resistance: $r_s = 0.26 \, \Omega$ (Typ.)
- Useful for small size Set

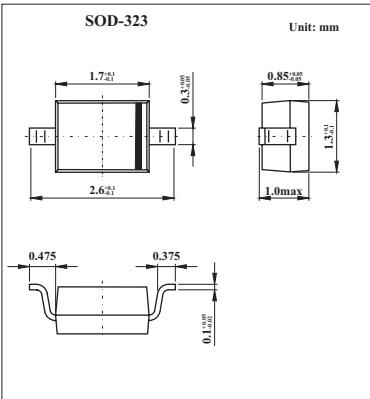

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	10	V
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_R	$I_R = 1 \, \mu\text{A}$	10			V
Reverse Current	I_R	$V_R = 10 \, \text{V}$			3	nA
Capacitance	C_{1V}	$f = 1 \, \text{MHz}; V_R = 1 \, \text{V}$	18		20	pF
	C_{4V}	$f = 1 \, \text{MHz}; V_R = 4 \, \text{V}$	10.1		11.6	
Capacitance Ratio	C_{1V}/C_{4V}		1.55			
Series Resistance	r_s	$V_R = 1 \, \text{V}, f = 470 \, \text{MHz}$		0.26	0.4	Ω

■ Marking

Marking	TH
---------	----