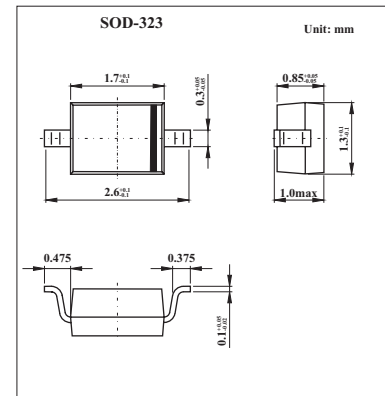


## Silicon Epitaxial Planar Diode

## 1SV324

## ■ Features

- High Capacitance Ratio:  $C_{1V}/C_{4V}=4.3$ (Typ.)
- Low Series Resistance:  $r_s=0.4\ \Omega$  (Typ.)
- Useful for Small Size Tuner

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Value	Unit
Reverse Voltage	$V_R$	10	V
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	$V_R$	$I_R = 1\ \mu\text{A}$	10			V
Reverse Current	$I_R$	$V_R = 10\ \text{V}$			3	nA
Capacitance	$C_{1V}$	$f = 1\ \text{MHz}; V_R = 1\ \text{V}$	44		49.5	pF
	$C_{4V}$	$f = 1\ \text{MHz}; V_R = 4\ \text{V}$	9.2		12	
Capacitance Ratio	$C_{1V}/C_{4V}$		4	4.3		
Series Resistance	$r_s$	$V_R = 4\ \text{V}, f = 470\ \text{MHz}$		0.4	0.8	$\Omega$

Note

1.Signal level when capacitance is measured:  $V_{sig} = 500\text{mV}_{rms}$ 

## ■ Marking

Marking	V8
---------	----