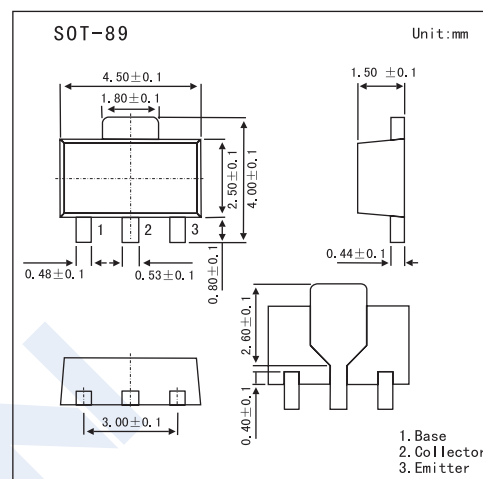


High Voltage Switching Applications

2SA1200

■ Features

- High Voltage : $V_{CE0} = -150V$
- High Transition Frequency : $f_T = 120MHz(typ.)$
- Small Flat Package
- Complementary to 2SC2880

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-Emitter Voltage	V_{CE0}	-150	V
Collector-Base Voltage	V_{CB0}	-150	V
Emitter-Base Voltage	V_{EB0}	-5	V
Collector Current	I_C	-50	mA
Base Current	I_B	-10	mA
Collector Power Dissipation	P_C	500	mW
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$

■ Electrical Characteristics $T_a = 25^\circ C$







Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Emitter Cut-off Current	I_{E0}	$V_{EB} = -5V, I_C = 0$			-0.1	μA
Collector Cut-off Current	I_{C0}	$V_{CB} = -150V, I_E = 0$			-0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = -5V, I_C = -10mA$	70		240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -1mA$			-0.8	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -5V, I_C = -30mA$			-0.9	V
Transtion Frequency	f_T	$V_{CE} = -30V, I_C = -10mA$		120		MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$		4.0	5.0	pF

■ h_{FE} Classification

Marking	B	
Rank	O	Y
h_{FE}	70~140	120~240

2SA1200

■ Electrical Characteristics Curves

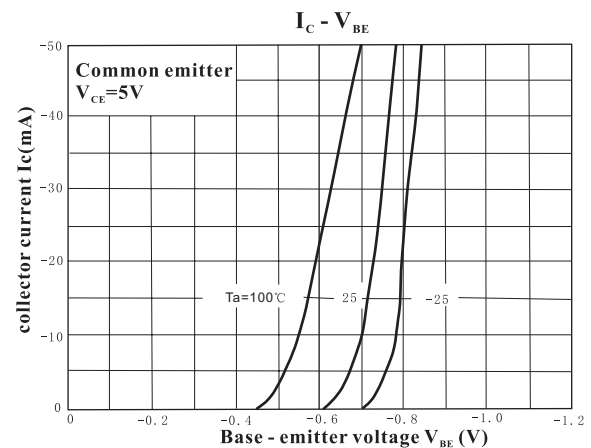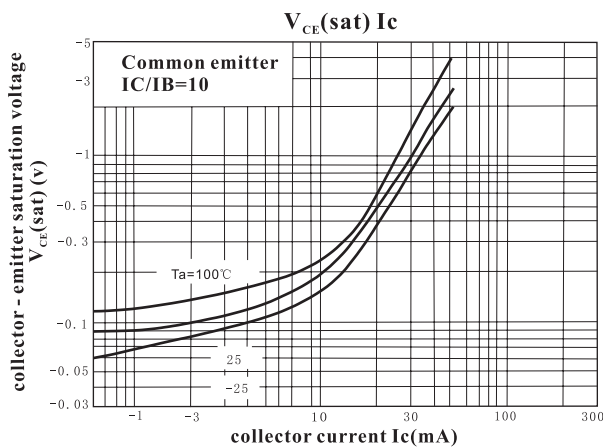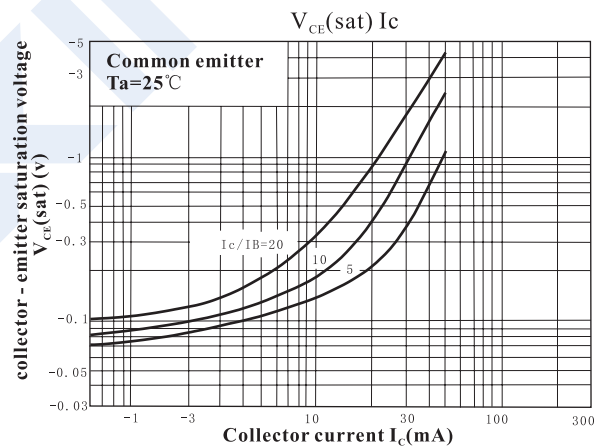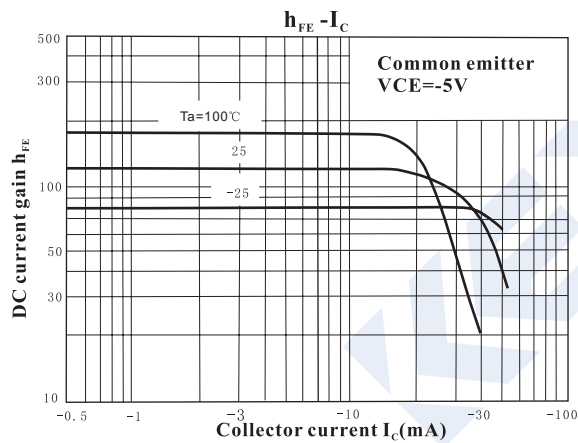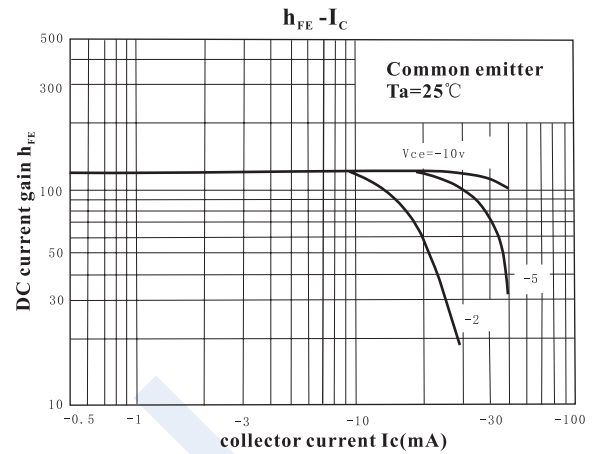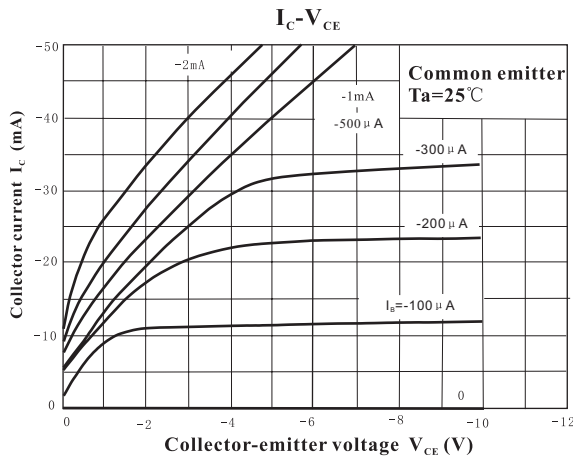

2SA1200

