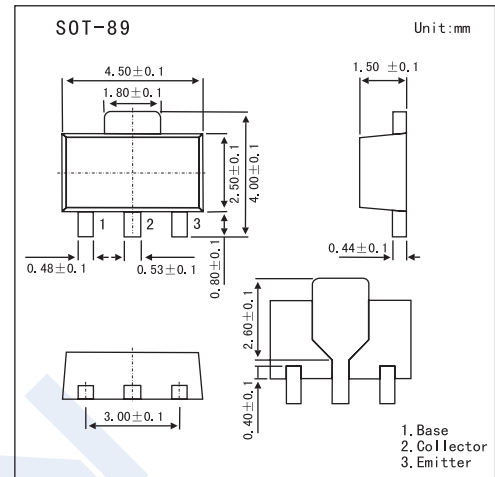


## High-Voltage Switching Applications

## 2SC3648

## ■ Features

- Adoption of FBET, MBIT Processes
- High Breakdown Voltage and Large Current Capacity
- Fast Switching Speed

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CB0}$	180	V
Collector-Emitter Voltage	$V_{CE0}$	160	V
Emitter-Base Voltage	$V_{EB0}$	6	V
Collector Current	$I_C$	0.7	A
Collector Current (Pulse)	$I_{CP}$	1.5	A
Collector Power Dissipation	$P_C$	500	mW
	$P_{C^*}$	1.3	W
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$


\* Mounted on ceramic board (250 mm<sup>2</sup> x 0.8 mm)

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = 120\text{V}, I_E = 0$			0.1	$\mu\text{A}$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB} = 4\text{V}, I_C = 0$			0.1	$\mu\text{A}$
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	180			V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, R_{BE} = \infty$	160			V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	6			V
DC Current Gain	$h_{FE}$	$V_{CE} = 5\text{V}, I_C = 100\text{mA}$	100		400	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 250\text{mA}, I_B = 25\text{mA}$		0.2	0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 250\text{mA}, I_B = 25\text{mA}$		0.85	1.2	V
Gain-Bandwidth Product	$f_T$	$V_{CE} = 10\text{V}, I_C = 50\text{mA}$		120		MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHz}$		11		pF
Turn-On Time	$t_{on}$	See Test Circuit.		60		ns
Storage Time	$t_{stg}$			900		
Fall Time	$t_f$			60		

# 2SC3648

## Test Circuit




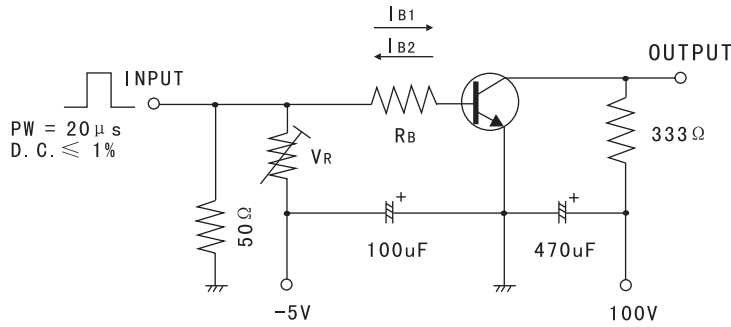


$20I_{B1} = -20I_{B2} = I_C = 300\text{mA}$   
 (For PNP, the polarity is reversed.)

## hFE Classification

Marking	CD		
Rank	R	S	T
hFE	100 ~ 200	140 ~ 280	200 ~ 400

## Electrical Characteristics Curves

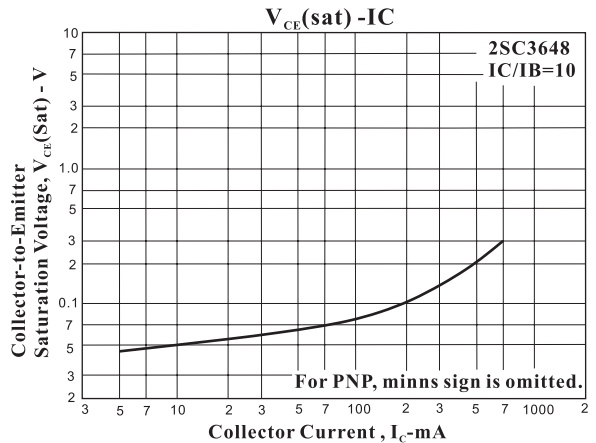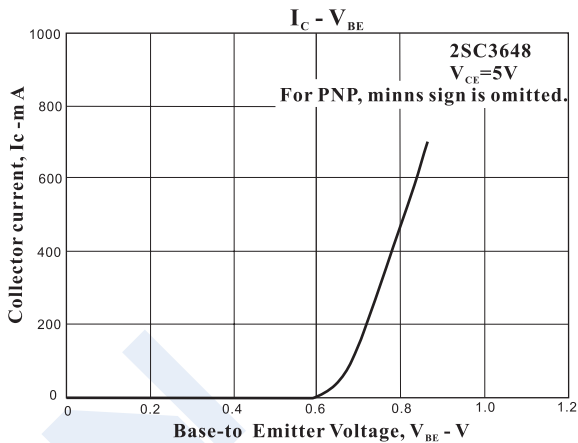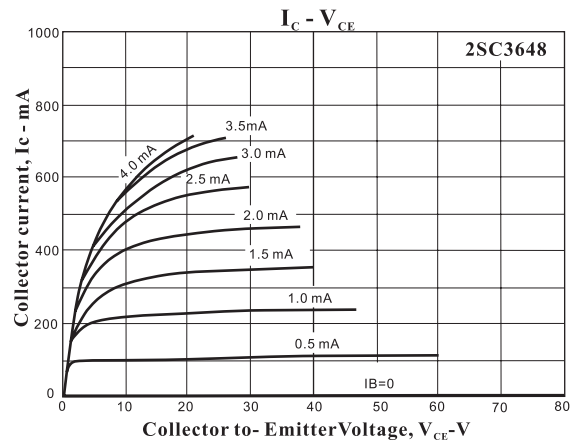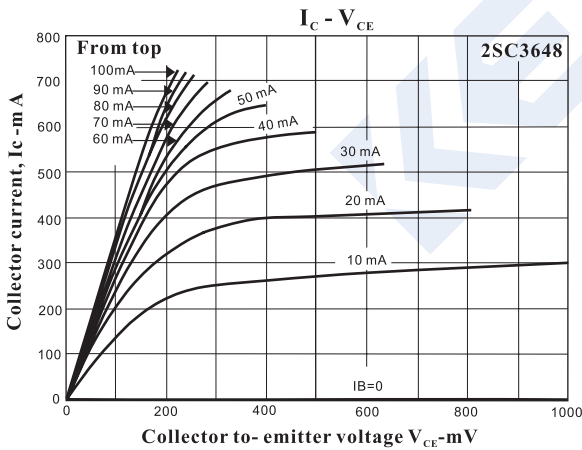

# 2SC3648

