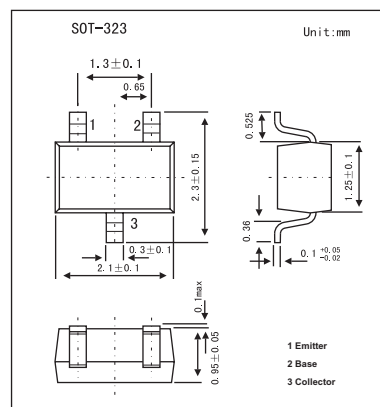


Medium power amplifier

2SC5342UF

■ Features

- Large collector current : $I_c=500\text{mA}$
- Low collector saturation voltage enabling low-voltage operation

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Parameter | Symbol | Rating | Unit |
|---------------------------|-----------|-------------|------------------|
| Collector-base voltage | V_{CB0} | 40 | V |
| Collector-emitter voltage | V_{CE0} | 32 | V |
| Emitter-base voltage | V_{EB0} | 5 | V |
| Collector current | I_c | 500 | mA |
| Collector dissipation | P_c | 200 | mW |
| Junction temperature | T_j | 150 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -55 to +150 | $^\circ\text{C}$ |

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

| Parameter | Symbol | Testconditons | Min | Typ | Max | Unit |
|--------------------------------------|---------------|--|-----|-----|------|---------------|
| Collector-base breakdown voltage | BV_{CB0} | $I_c=100\mu\text{A}$, $I_E=0$ | 40 | | | V |
| Collector-emitter breakdown voltage | BV_{CE0} | $I_c=1\text{mA}$, $I_B=0$ | 32 | | | V |
| Emitter-base breakdown voltage | BV_{EB0} | $I_E=10\mu\text{A}$, $I_C=0$ | 5 | | | V |
| Collector cutoff current | I_{cB0} | $V_{CB}=40\text{V}$, $I_E=0$ | | | 0.1 | μA |
| Emitter cutoff current | I_{E0} | $V_{EB}=5\text{V}$, $I_C=0$ | | | 0.1 | μA |
| DC current transfer ratio | h_{FE} | $V_{CE}=1\text{V}$, $I_c=100\text{mA}$ | 70 | | 240 | |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_c=100\text{mA}$, $I_B=10\text{mA}$ | | | 0.25 | V |
| Transition frequency | f_T | $V_{CE}=6\text{V}$, $I_E=-20\text{mA}$ | | 300 | | MHz |
| Output capacitance | C_{ob} | $V_{CB}=6\text{V}$, $I_E=0$, $f=1\text{MHz}$ | | 7 | | pF |

■ h_{FE} Classification

| Marking | B | |
|----------|--------|---------|
| | O | Y |
| h_{FE} | 70~140 | 120~240 |