


## PNP General Purpose Transistors

### KTA1662

#### Features

- Small Flat Package.
- Complementary to KTC4374.

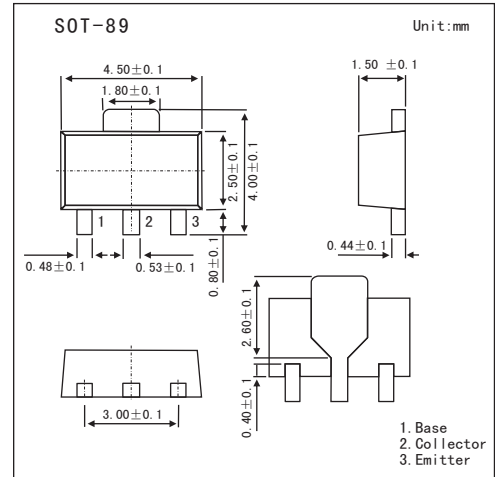

#### Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage	V <sub>CB0</sub>	-80	V
Collector-emitter voltage	V <sub>CEO</sub>	-80	V
Emitter-base voltage	V <sub>EBO</sub>	-5	V
Collector current	I <sub>C</sub>	-0.4	A
Collector power dissipation	P <sub>C</sub>	500	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 to 150	°C

#### Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test conditons	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -1mA, I <sub>E</sub> = 0	-80			
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = -10mA, I <sub>B</sub> = 0	-80			V
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = -1mA, I <sub>C</sub> = 0	-5			
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = -80 V, I <sub>E</sub> = 0			-0.1	μA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = -5 V, I <sub>C</sub> = 0			-0.1	μA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = -2 V, I <sub>C</sub> = -50mA	70		240	
		V <sub>CE</sub> = -2 V, I <sub>C</sub> = -200m A	40			
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -200mA, I <sub>B</sub> = -20mA			-0.4	V
Base-emitter voltage	V <sub>BE</sub>	V <sub>CE</sub> = -2V, I <sub>C</sub> = -5mA			-1.2	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = -10V, I <sub>C</sub> = -10mA		120		MHz
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -10V, I <sub>E</sub> = 0, f = 1MHz		14		

#### h<sub>FE</sub> Classification

Marking	FO	FY
Rank	O	Y
Range	70 140	120 240