


SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

P6SMBJ6.5A

Features

- For surface mounted applications in order to optimize board space.
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Excellent clamping capability
- Low inductance

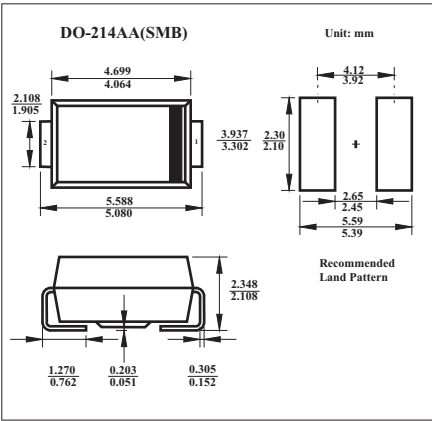

Absolute Maximum Ratings $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Ratings	Units
Peak Power Dissipation at $T_a=25^{\circ}\text{C}$, $T_P=1\text{ms}$ (Note 1,2)	PPM	Minimum 600	W
Peak Forward Surge Current (Note 2,3)	IFSM	100	A
Peak Pulse Current Current on 10/1000 μs waveform (Note 1)	I _{PPM}	See Table	A
Operating and Storage Temperature Range	T_j, T_{STG}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics $T_a = 25^{\circ}\text{C}$

Part Number	Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
	VRWM	VBR @ I _T		I _T	I _R @ VRWM	V _C @ I _{PP}	I _{PP}
		Min.	Max.				
	V	V	V	mA	μA	V	A
P6SMBJ6.5A	6.5	7.22	8.30	10	500	11.2	53.6

NOTES:

- Non-repetitive current pulse, per Fig. 3 and derated above $T_a=25^{\circ}\text{C}$ per
- Mounted on 5.0mm² (.013mm thick) land areas.
- Measured on 8.3ms , single half sine-wave or equivalent square wave , duty cycle= 4 pulses per minutes maximum.

Marking

Marking	KK
---------	----

P6SMBJ6.5A

Typical Characteristics

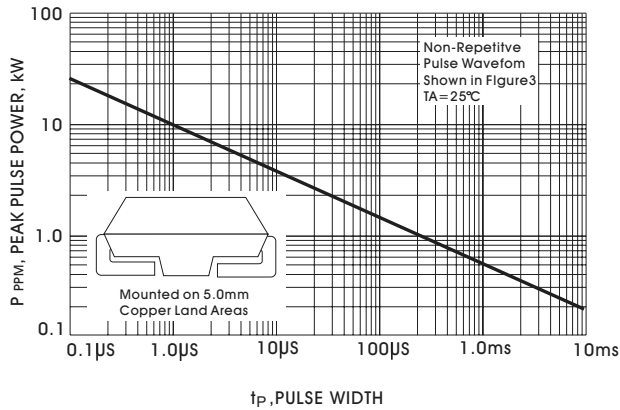


Figure 1, Peak Pulse Power Rating Curve

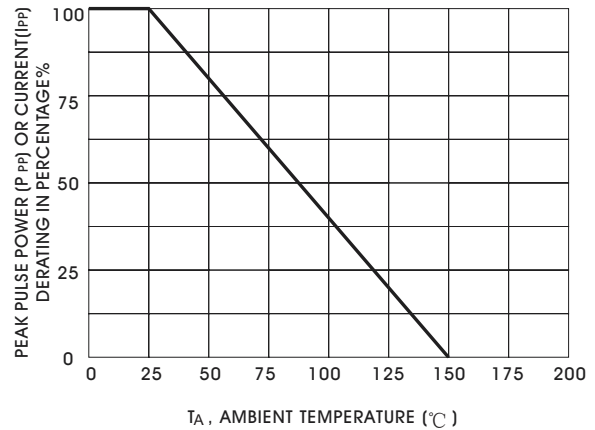


Figure 2, Derating Curve

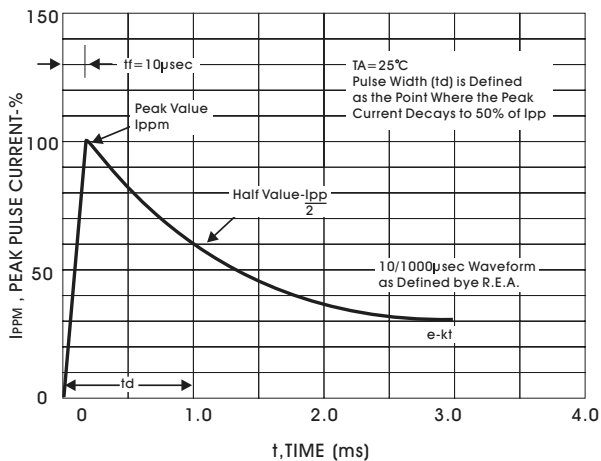


Figure 3, Pulse Waveform

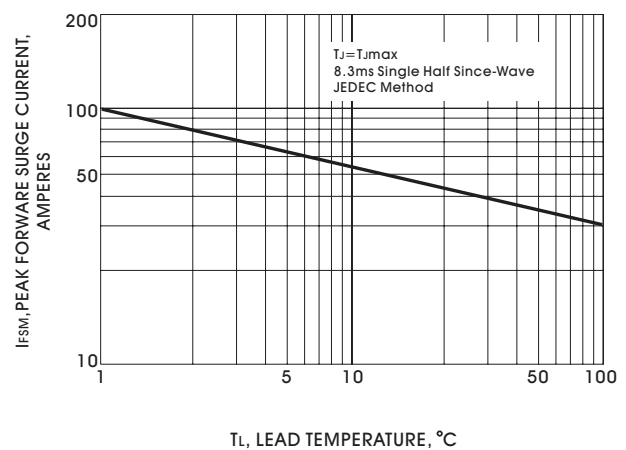


Figure 4, Maximum Non-Repetitive Peak Forward Surge Current

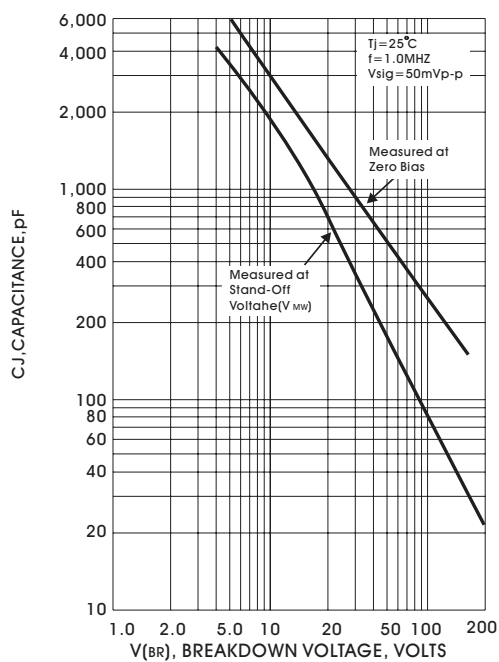


Figure 5, Typical Capacitance