

MOS Field Effect Transistor

2SJ598

■ Features



- Low on-resistance

$R_{DS(on)1} = 130 \text{ m}\Omega \text{ MAX. (V}_{GS} = -10 \text{ V, I}_D = -6 \text{ A)}$

$R_{DS(on)2} = 190 \text{ m}\Omega \text{ MAX. (V}_{GS} = -4.0 \text{ V, I}_D = -6 \text{ A)}$

- Low C_{iss} : $C_{iss} = 720 \text{ pF TYP.}$

- Built-in gate protection diode

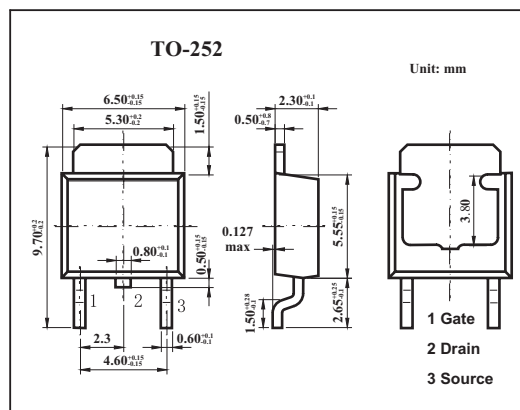

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Drain to source voltage	V_{DS}	-60	V
Gate to source voltage	V_{GS}	± 20	V
Drain current (DC)	I_D	± 12	A
Drain current(pulse) *	I_D	± 30	A
Power dissipation	P_D	23	W
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

* $PW \leq 10 \mu\text{s}$, duty cycle $\leq 1\%$

2SJ598

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Drain cut-off current	I_{DSS}	$V_{DS}=-60V, V_{GS}=0$			-10	μA
Gate leakage current	I_{GSS}	$V_{GS}=\pm 16V, V_{DS}=0$			± 10	μA
Gate to source cutoff voltage	$V_{GS(off)}$	$V_{DS}=-10V, I_D=-1mA$	-1.5	-2.0	-2.5	V
Forward transfer admittance	$ Y_{fs} $	$V_{DS}=-10V, I_D=-6A$	5	11		S
Drain to source on-state resistance	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-6A$		102	130	$m\Omega$
		$V_{GS}=-4.0V, I_D=-6A$		131	190	$m\Omega$
Input capacitance	C_{iss}	$V_{DS}=-10V, V_{GS}=0, f=1MHz$		720		pF
Output capacitance	C_{oss}			150		pF
Reverse transfer capacitance	C_{rss}			50		pF
Turn-on delay time	$t_{d(on)}$	$V_{GS(on)}=-10V, I_D=-6A, V_{DD}=-30V, R_G=0$ Ω		70		ns
Rise time	t_r			4		ns
Turn-off delay time	$t_{d(off)}$			35		ns
Fall time	t_f			10		ns
Total Gate Charge	Q_G	$I_D = -12 A$		15		nC
Gate to Source Charge	Q_{GS}	$V_{DD} = -48 V$		3		nC
Gate to Drain Charge	Q_{GD}	$V_{GS} = -10 V$		4		nC
Body Diode Forward Voltage	$V_{F(S-D)}$	$I_F = 12 A, V_{GS} = 0 V$		0.98		V
Reverse Recovery Time	t_{rr}	$I_F = 12 A, V_{GS} = 0 V$		50		ns
Reverse Recovery Charge	Q_{rr}	$di/dt = 100 A / \mu s$		100		nC