


Three-terminal Positive Voltage Regulator 78M12

Features

- Maximum Output current I_{OM} : 0.5 A
- Output voltage V_o : 12V
- Continuous total dissipation P_D : 1.25W

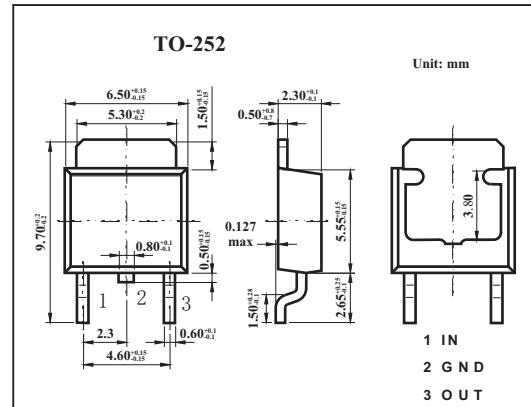

Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	35	V
Operating Junction Temperature Range	T_{OPR}	0 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^\circ\text{C}$

Electrical Characteristics ($V_{IN}=19\text{V}, I_o=350\text{mA}, 0^\circ\text{C} < T_j < 125^\circ\text{C}, C_i=0.33\ \mu\text{F}, C_o=0.1\ \mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Output voltage	V_o	$T_j=25^\circ\text{C}$	11.5	12	12.5	V
		$14.5\ V_i\ 27\text{V}, I_o=5\text{mA}\ 350\text{mA}, P_o\ 15\text{W}$	11.4	12	12.6	V
Load regulation	V_o	$I_o=5\text{mA}\ 500\text{mA}, T_j=25^\circ\text{C}$		25	240	mV
		$I_o=5\text{mA}\ 200\text{mA}, T_j=25^\circ\text{C}$		10	120	mV
Line regulation	V_o	$14.5\ V_i\ 30\text{V}, I_o=200\text{mA}, T_j=25^\circ\text{C}$		10	100	mV
		$16\ V_i\ 30\text{V}, I_o=200\text{mA}, T_j=25^\circ\text{C}$		3	50	mV
Quiescent current	I_q	$T_j=25^\circ\text{C}$		4.6	6.0	mA
Quiescent current change	I_q	$14.5\text{V}\ V_i\ 30\text{V}, I_o=200\text{mA}$			0.8	mA
		$5\text{mA}\ I_o\ 350\text{mA}$			0.5	mA
Output noise voltage	V_N	$10\text{Hz}\ f\ 100\text{KHz}, T_j=25^\circ\text{C}$		75		μV
Ripple rejection	RR	$15\text{V}\ V_i\ 25\text{V}, f=120\text{Hz}, I_{OUT}=300\text{mA}$	55	80		dB
Dropout Voltage	V_d	$I_o=350\text{mA}, T_j=25^\circ\text{C}$		2.0		V
Short Circuit Current	I_{sc}	$V_i=19\text{V}, T_j=25^\circ\text{C}$		240		mA
Peak Output Current	I_{pk}	$T_j=25^\circ\text{C}$		0.7		A

Typical Application

