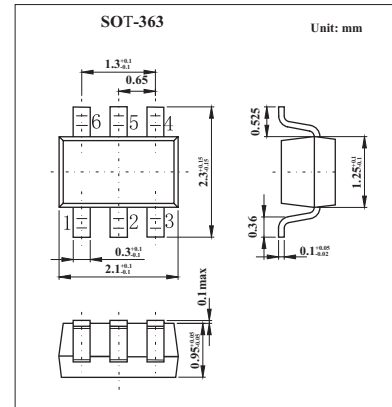



P-Channel 1.8-V (G-S) MOSFET

KI1407DL

■ Features

- TrenchFET Power MOSFETs
- 1.8 V Rated

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	5 secs	Steady State	Unit
Drain-source voltage	V_{DS}	-12		V
Gate-source voltage	V_{GS}	± 8		V
Continuous drain current ($T_J = 150^\circ\text{C}$)*	I_D	-1.8	-1.6	A
$T_A = 25^\circ\text{C}$ $T_A = 85^\circ\text{C}$		-1.4	-1.2	
Pulsed drain current	I_{DM}	-5		A
Continuous source current (diode conduction) *	I_S	-0.8	-0.8	A
Power dissipation *	P_D	0.625	0.568	W
$T_A = 25^\circ\text{C}$ $T_A = 85^\circ\text{C}$		0.400	0.295	
Operating junction and storage temperature range	T_J, T_{stg}	-55 to +150		$^\circ\text{C}$

* Surface Mounted on 1" X 1" FR4 Board.

■ Thermal Resistance Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient*	R_{thJA}	$t \leq 5$ sec	165	200	$^\circ\text{C}/\text{W}$
		Steady State	180	220	
Maximum Junction-to-Foot (Drain)	R_{thJF}	105	130		

* Surface Mounted on 1" X 1" FR4 Board.

KI1407DL

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-0.45		-1	V
Gate-body leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} = -12 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -20 V, V _{GS} = 0 V, T _J = 85 °C			-5	
On-state drain current	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -4.5 V	-2			A
Drain-source on-state resistance	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -1.8 A		0.105	0.130	Ω
		V _{GS} = -2.5V, I _D = -1.5 A		0.140	0.170	
		V _{GS} = -1.8V, I _D = -0.8A		0.185	0.225	
Forward transconductance	g _{fs}	V _{DS} = -10 V, I _D = -1.8 A		4.3		S
Diode forward voltage	V _{SD}	I _S = -0.8 A, V _{GS} = 0 V		-0.77	-1.1	V
Total gate charge *	Q _g	V _{DS} = -6V, V _{GS} = -4.5 V, I _D = -1.8A		5.5	7.0	nC
Gate-source charge *	Q _{gs}			0.95		
Gate-drain charge *	Q _{gd}			1.10		
Turn-on time	t _{d(on)}	V _{DD} = -6V, R _L = 10 Ω, I _D = -1A, V _{GEN} = -4.5V, R _G = 6 Ω		8	12	ns
	t _r			33	50	
Turn-off time	t _{d(off)}			32	50	
	t _f			29	45	
Source-Drain Reverse Recovery Time	t _{rr}		I _F = -0.8 A, di/dt = 100 A/μs		20	

* Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.

■ Marking

Marking	OC
---------	----