

Product Overview



2403 260 00001

SPEAKER

11x15x3.5 mm DONAU

Features:

- Industry reference standard
- Compound membrane for minimum THD, Q-factor and tumbling
- Very good performance/price ratio
- Pre-loaded springs for mechanical robustness and easy handling
- IPx8 waterproof (tested in 1.5 m water for 30 min.) version available (2403 260 00107)



Specifications:

Impedance	8	Ohms
Sensitivity *	73	dB (1W/m)
Air pumping capacity	69	mm ³
Typical backvolume	1	cm ³
Total volume	1,57	cm ³
f ₀ (typical backvolume)	800	Hz
Nominal power **	500	mW
SPL Max ***	89	dB
Max sine power	350	mW


Footnotes:

*) average value measured in baffle

**) using shaped noise signal according to product data sheet

***) average value measured in baffle in 0,1 meter distance at max sine power, in typical backvolume

Frequency Response

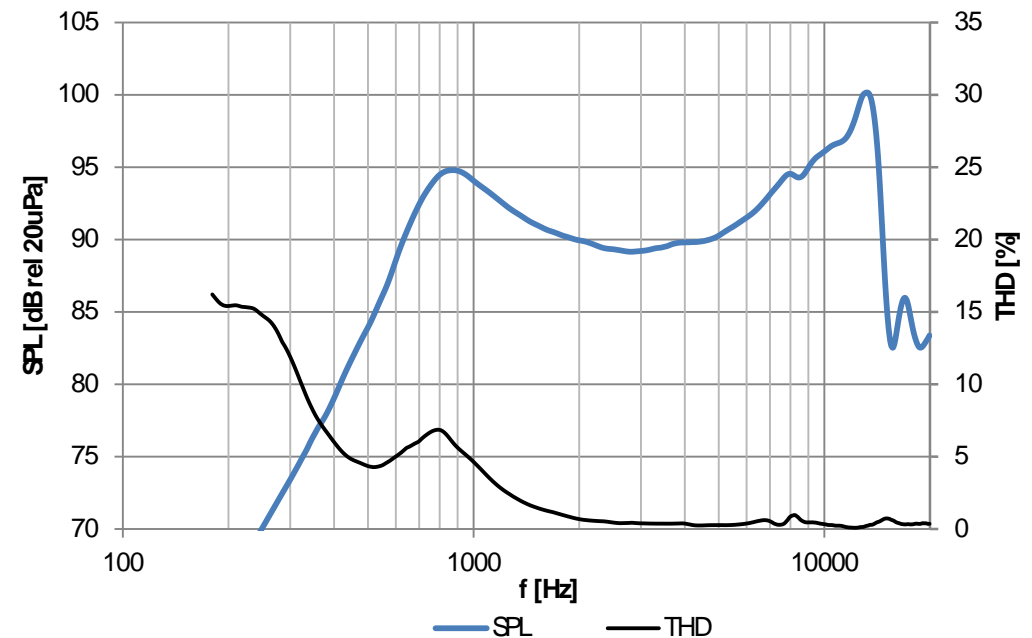

measured in IEC baffle at 350mW in 10 cm distance
with 1ccm back cavity