




3rd/2nd Gen Intel® Core™
COM Express® Basic

CR960-HM76

HM76

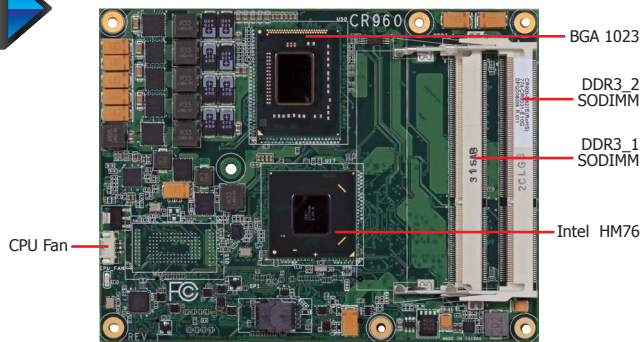


Features


MEMORY	2 DDR3/DDR3L SODIMM up to 16GB
EXPANSION	1 PCIe x16, 7 PCIe x1 1 LPC, 1 SMBus, 1 I ² C, 2 serial 1 VGA, 1 LVDS, 3 DDI (HDMI/DVI/DP/SDVO) 12 USB: 4 USB 3.0, 8 USB 2.0 4 SATA: 2 SATA 3.0, 2 SATA 2.0 SSD (optional) 4-bit input and 4-bit output GPIO
LAN	1 LAN
DIMENSIONS	COM Express® R2.1 Basic, Type 6 95mm x 125mm (3.74" x 4.9")



Mechanical Drawing

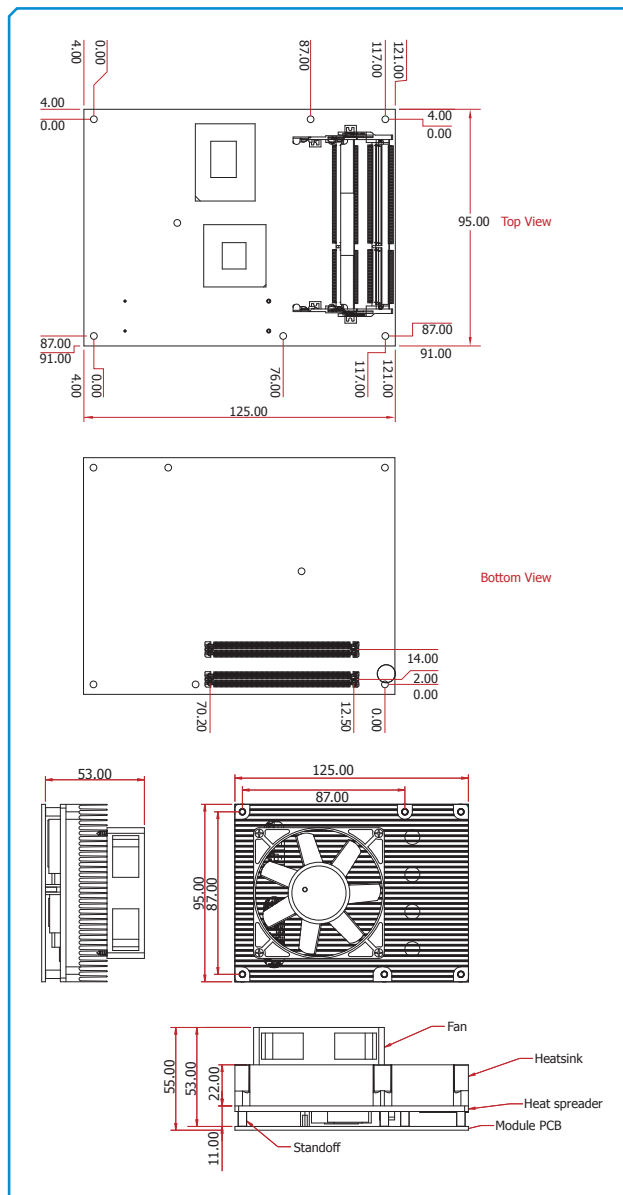

Block Diagram

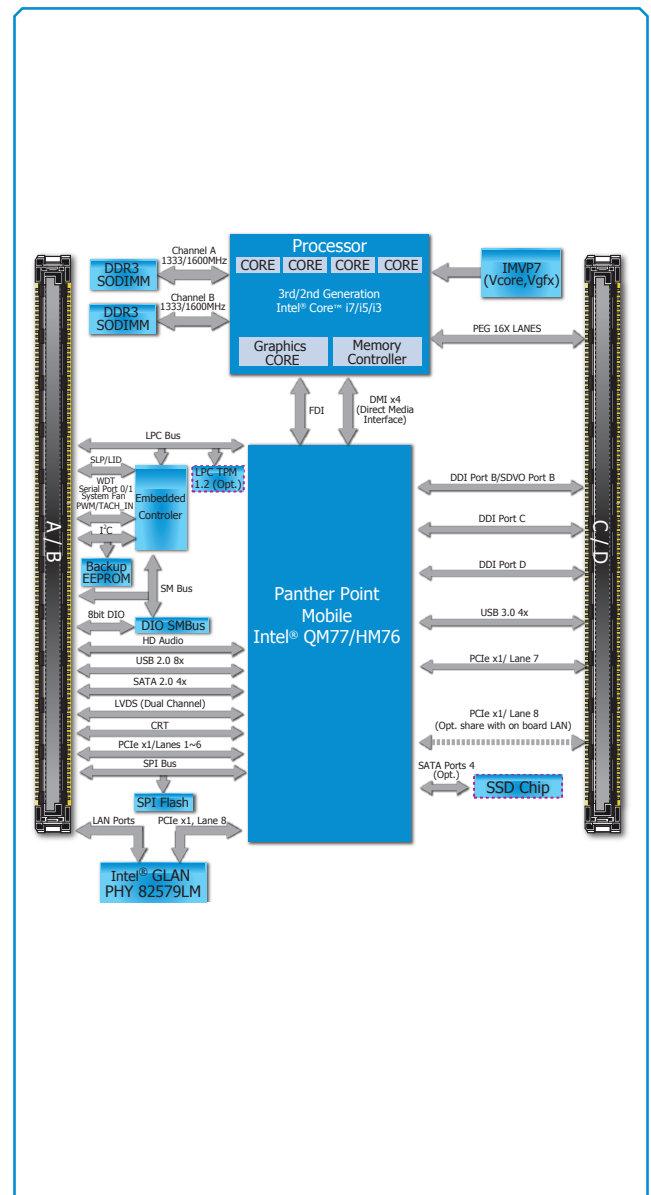

CR960-HM76

► Specifications

PROCESSOR

- BGA 1023 packaging technology
 - 3rd generation Intel® Core™ processors (22nm process technology)
 - 2nd generation Intel® Core™ processors (32nm process technology)
- Please refer to the Ordering Information below

CHIPSET

- Intel® HM76 Express Chipset

SYSTEM MEMORY

- Two 204-pin DDR3/DDR3L SODIMM sockets
- 3rd generation processors
 - Supports DDR3/DDR3L 1333/1600 MHz (i7/i5/i3)
 - Supports DDR3/DDR3L 1066/1333/1600 MHz (i7 Quad Core)
- 2nd generation processors
 - Supports DDR3 1066/1333 MHz (i7/i5/i3/Celeron)
 - Supports DDR3 1066/1333/1600 MHz (i7 Quad Core)
- Supports dual channel memory interface
- Supports up to 16GB system memory
- DRAM device technologies: 1Gb, 2Gb and 4Gb DDR3 DRAM technologies are supported for x8 and x16 devices, unbuffered, non-ECC

ONBOARD GRAPHICS FEATURES

- Intel® HD Graphics 4000 (3rd generation processors)
- Intel® HD Graphics 3000 (2nd generation processors)
- Intel® HD Graphics (Intel® Celeron™ processors)
- Supports VGA, LVDS and DDI interfaces
- VGA: resolution up to 2048x1536 @ 75Hz
- LVDS: Single Channel - 18/24-bit; Dual Channel - 36/48-bit, resolution up to 1920x1200 @ 60Hz
- Digital Display Interfaces: HDMI, DVI, DP or SDVO (for Port B)
- HDMI, DVI, DP: resolution up to 1920x1200 @ 60Hz
- Intel® Clear Video Technology
- DirectX Video Acceleration (DXVA) for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Supports DirectX 11/10.1/10/9 and OpenGL 3.0 (3rd generation processors)
- Supports DirectX 10.1/10/9 and OpenGL 3.0 (2nd generation processors)

ONBOARD AUDIO FEATURES

- Supports High Definition Audio interface

ONBOARD LAN FEATURES

- Intel® 82579LM Gigabit Ethernet PHY
- Integrated 10/100/1000 transceiver
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab

SERIAL ATA (SATA) INTERFACE

- Supports 4 Serial ATA interfaces
- 2 SATA 3.0 with data transfer rate up to 6Gb/s
- 2 SATA 2.0 with data transfer rate up to 3Gb/s
- Integrated Advanced Host Controller Interface (AHCI) controller

TRUSTED PLATFORM MODULE (TPM) - optional

- Provides a Trusted PC for secure transactions
- Provides software license protection, enforcement and password protection

SSD (optional)

- 2GB/4GB/8GB/16GB/32GB/64GB
- Write: 30MB/sec (max), Read: 70MB/sec (max)
- SATA to SSD onboard

WATCHDOG TIMER

- Watchdog timeout programmable via software from 1 to 255 seconds

EXPANSION INTERFACES

- Supports 4 USB 3.0 ports
- Supports 8 USB 2.0 ports
- Supports 1 PCIe x16 interface
- Supports 7 PCIe x1 interfaces
- Supports LPC interface
- Supports I²C interface
- Supports SMBus interface
- Supports 2 serial interfaces (TX/RX)
- Supports 4-bit input and 4-bit output GPIO

BIOS

- 64Mbit SPI BIOS

OS SUPPORT

- Windows 7 Ultimate x64 & SP1 (64-bit)
- Windows XP Professional x86 & SP3 (32-bit)

TEMPERATURE

- 0°C to 60°C

HUMIDITY

- 5% to 90%

POWER

- Input: 5VSB (option), 12V, VCC_RTC

PCB

- Dimensions: 95mm (3.74") x 125mm (4.9")
- Compliance: PICMG COM Express® R2.1 basic form factor, Type 6

► Ordering Information

Model Name	Chipset	Temperature	Memory	SSD	Processors
CR960	- HM76	B	S	0	- 3615QE
		B: 0°C to 60°C	S: Socket	0: None 2: 2GB 4: 4GB 8: 8GB 1: 16GB 3: 32GB 6: 64GB	3rd Generation 3615QE: Intel® Core™ i7-3615QE, 6M Cache, up to 3.30 GHz, 45W 3612QE: Intel® Core™ i7-3612QE, 6M Cache, up to 3.10 GHz, 35W 3555LE: Intel® Core™ i7-3555LE, 4M Cache, up to 3.20 GHz, 25W 3517UE: Intel® Core™ i7-3517UE, 4M Cache, up to 2.80 GHz, 17W 3610ME: Intel® Core™ i5-3610ME, 3M Cache, up to 3.30 GHz, 35W 3120ME: Intel® Core™ i3-3120ME, 3M Cache, 2.40 GHz, 35W 3217UE: Intel® Core™ i3-3217UE, 3M Cache, 1.60 GHz, 17W 1020E: Intel® Celeron™ 1020E, 2M Cache, 2.20 GHz, 35W 1047UE: Intel® Celeron™ 1047UE, 2M Cache, 1.40 GHz, 17W 927UE: Intel® Celeron™ 927UE, 1M Cache, 1.50 GHz, 17W 2nd Generation 2715QE: Intel® Core™ i7-2715QE, 6M Cache, up to 3.00 GHz, 45W 2655LE: Intel® Core™ i7-2655LE, 4M Cache, up to 2.90 GHz, 25W 2610UE: Intel® Core™ i7-2610UE, 4M Cache, up to 2.40 GHz, 17W 2515E: Intel® Core™ i5-2515E, 3M Cache, up to 3.10 GHz, 35W 2310E: Intel® Core™ i3-2310E, 3M Cache, 2.10 GHz, 35W 2340UE: Intel® Core™ i3-2340UE, 3M Cache, 1.30 GHz, 17W 810E: Intel® Celeron™ B810E, 2M Cache, 1.6GHz, 35W 847E: Intel® Celeron™ 847E, 2M Cache, 1.1GHz, 17W 827E: Intel® Celeron™ 827E, 1.5M Cache, 1.4GHz, 17W 807UE: Intel® Celeron™ 807UE, 1M Cache, 1.00 GHz, 10W

► Packing List

- 1 CR960 board
- 1 QR (Quick Reference)
- 1 DVD

► Optional Items

- COM331-B carrier board kit
- COM101-BAT carrier board kit
- Heat spreader with heat sink and fan: 761-CR9601-000G