

Xtreme/104-Express


Serial Communications


Xtreme/104-Express

Features

- PCI/104-Express
- Eight ports
- Switchable RS-232/422/485
- Supports full duplex (4 wire) with RTS/CTS flow control, half duplex (2 wire) with auto TxD echo cancellation and multi-drop (4 wire) modes in RS-422/485
- Supports baud rates up to 15.625 Mbps
- Selectable for tri-state on power up in RS-422/485 mode
- 1/8 load RS-485 transceivers allow up to 256 devices on a bus
- Filtering on all ports to improve immunity to EMI and noisy transmission lines
- Supports 9-bit data modes
- Operating temperature range of -40°C to 85°C
- RoHS compliant

Specifications

Number of Ports	8 ports
Electrical Interface	Hardware selectable RS-232/422/485
Connectors	Two right angle, 40 pin 0.100" pitch headers Optional DB-9 cables
Control Signals	RS-232: TxD, RxD, RTS, CTS, RI, DTR, DSR, DCD, SG (Signal Ground) RS-422/485: TxD _{+/+} , RxD _{+/+} , RTS _{+/+} , CTS _{+/+} , SR (Signal Reference)
Baud Rate	RS-232: 50 bps to 921.6 Kbps RS-422/485: up to 15.625 Mbps
Interrupts	Assigned by Plug and Play resources
Memory Addresses	Assigned by Plug and Play resources
UART Type	One octal PCI Express UART with up to 128 byte transmit and receive FIFO buffers
Dimensions	Fully PCI/104-Express compliant: 3.550" x 3.775"
Environmental	Operating Temperature: -40° C to 85° C (-40° F to 185° F) Storage Temperature: -40° C to 125° C (-40° F to 257° F) Humidity: 95% non-condensing
Bus	PCI/104-Express or PCIe/104
Software Compatibility	Windows 2000/XP/XP 64-Bit/2003/Server 2003 64-Bit, Vista 
Power Requirements	5V DC @ 100mA (typical), 650mA (max.)
System Requirements	An available x1 lane within a PCI/104-Express stack

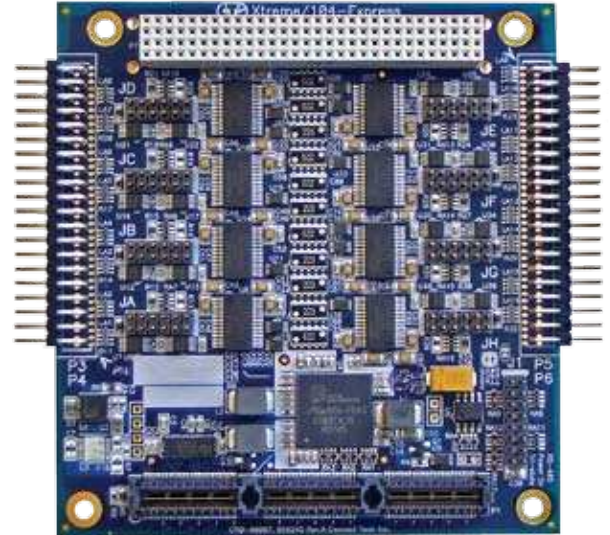

Xtreme/104-Express is Connect Tech's first PCI/104-Express multi-port serial board. Fully PCI/104-Express compliant, this board provides a PCI-104 pass-through connector for easy transition from legacy PCI-104 cards to PCI Express stacks.

Connect Tech's highest throughput to date, Xtreme/104-Express incorporates a fractional baud rate generator that allows almost any baud rate to be matched accurately. Fail-safe transceivers ensure glitch-free network operations, while industrial temperature grade components make certain your communications are protected from disruptions that can occur in harsh environments.

Xtreme/104-Express offers reliability, high data rates and longevity for military, aerospace, medical, instrumentation and industrial control applications.

Xtreme/104-Express cards include a lifetime warranty and free technical support.



Connect Tech Inc.
Industrial Strength Communications

42 Arrow Road
Guelph, ON, Canada
N1K 1S6
www.connecttech.com

Phone: 1-519-836-1291
Toll free (in North America): 1-800-426-8979
Fax: 1-519-836-4878
Email: sales@connecttech.com