

Products in Family

DRF1600U/4GB (1 x 4GB 2Rx8 DIMM)
 DRF1600U/8GB (1 x 8GB 2Rx8 DIMM)


Features

240-pin JEDEC-compliant DIMMs
 133.35 mm wide by 30 mm high (1.181" x 5.25")
 Data Transfer Rate: 12.8 Gigabytes/sec
 Operating Voltage: 1.5 V \pm 0.075
 Fully RoHS Compliant

Description

Each DRF1600U upgrade consists of a single DDR3-1600 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-12800 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product

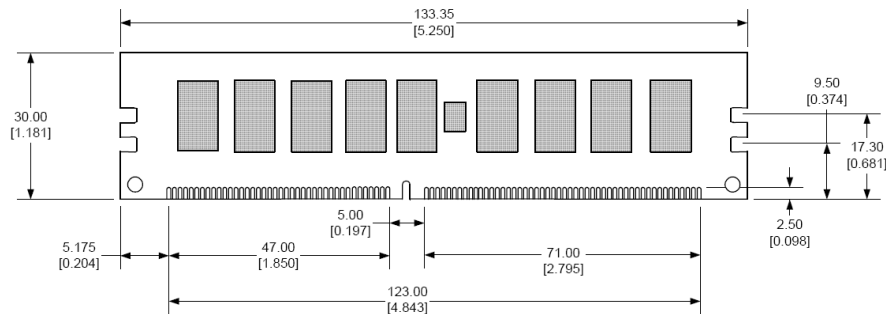
DRF1600U/4GB
 DRF1600U/8GB

Fujitsu Product

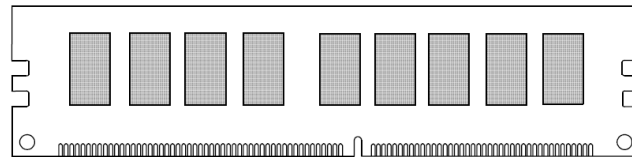
S26361-F3719-E514
 S26361-F3719-E515

Product Description

4GB 2Rx8 PC3-12800E-11-11
 8GB 2Rx8 PC3-12800E-11-11

Front view

Notes

Tolerances on all dimensions except where otherwise indicated are \pm .13 (.005).
 All dimensions are expressed in millimeters [inches]

Back view

Side view
