


Products in Family

GRF1333LR/16GB (1 x 16GB 4Rx4 LRDIMM)
GRF1333LR/32GB (1 x 32GB 4Rx4 LRDIMM)

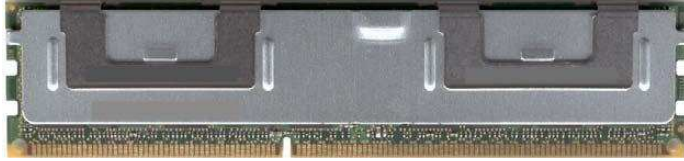

Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35V (1.28V~1.45V) Backward compatible: 1.5V(1.425V~1.575V) Fully RoHS Compliant Thermal Sensor Heat Spreader		Each GRF1333LR upgrade consists of a single load reduced memory module, which conforms to JEDEC's DDR3, PC3-10600L standard. Each DIMM is Quad-Rank. The ranks are comprised of eighteen DDP (Dual Die Pack) DDR3 SDRAMs. One 2K-bit EEPROM is used for Serial Presence Detect and an Isolation Memory Buffer, which enables higher system memory bandwidth at DDR3 speeds up to 1333 MT/s.
Dataram Product	Fujitsu Product	Supported in these Fujitsu systems:
GRF1333LR/16GB GRF1333LR/32GB	S26361-F3698-E516 S26361-F3698-E517	Fujitsu Primergy TX300 S7, RX200 S7, RX300 S7, RX350 S7

Notes

Tolerances on all dimensions except where otherwise indicated are $\pm .13$ (.005).
All dimensions are expressed in millimeters [inches]

